

659 Balm Beach Road East

Town of Midland

Traffic Impact Study for 2798860 Ontario Limited

Type of Document:
Final Report

Project Number:
JDE – 23042

Date Submitted:
July 18th, 2025



John Northcote, P.Eng.
Professional License #: 100124071

Jacob Losole, P.Eng.
Professional License #: 100509766



JD Northcote Engineering Inc.
86 Cumberland Street
Barrie, ON
705.725.4035
www.JDEngineering.ca

Legal Notification

This report was prepared by **JD Northcote Engineering Inc.** for the account of **2798860 Ontario Limited.**

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. **JD Northcote Engineering Inc.** accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this project.

Executive Summary

This report summarizes the traffic impact study for the proposed mixed-use development on a site municipally known as 659 Balm Beach Road East, located on the southwest corner of the County Road 93 / Balm Beach Road East intersection, Town of Midland [Town], County of Simcoe [County]. The report assesses the impact of traffic related to the development on the adjacent roadway and provides recommendations to accommodate this traffic in a safe and efficient manner.

The proposed development will include the following:

Block A-B

- 190 high-density units; and
- 3,800 m² (40,903 ft²) of ground floor commercial area.

Block C

- 130 high-density units; and
- 2,600 m² (27,986 ft²) of ground floor commercial area.

Block D-F

- 575 medium-density units.

Access to Blocks A-B and Blocks D-F will be provided via full-movement access onto County Road 25, opposite Sundowner Road (West) [West Access].

Access to Block C will be provided via full-movement access onto County Road 93 [East Access].

The scope of this analysis includes a review of the following intersections:

- County Road 93 / County Road 25 & Yonge Street;
- County Road 25 / Wilson Road & Marshall Road;
- County Road 25 / West Access & Sundowner Road; and
- County Road 93 / East Access.

Conclusions

1. The proposed development is estimated to generate 445 AM and 540 PM new peak hour vehicle trips in the study area.
2. Detailed traffic and pedestrian counts were conducted at the study intersections in November 2024.
3. An intersection operational analysis was completed at the study area intersections, using the existing (2025) and background (2028, 2033 and 2038) traffic volumes, without the proposed development traffic. This enabled a review of existing and future traffic deficiencies that would be present without the influence of the proposed development. The following improvements are recommended:

County Road 93 / County Road 25 & Yonge Street

Background (2038)

- Traffic signal optimization and increased cycle length (100s to 110s)
4. An estimate of the amount of traffic that would be generated by the Subject Site was prepared and assigned to the study area roads and intersections.

5. An intersection operation analysis was completed under total (2028, 2033 and 2038) traffic volumes with the proposed development operational at the study area intersections. The following improvements are recommended:

West Access & Sundowner Road / County Road 25

First Phase of Construction

- Provision of traffic signals with semi-actuated control (cycle length of 60 seconds);
- The implementation of an exclusive westbound left turn lane with 30m storage and 60m taper length; and
- The implementation of an exclusive eastbound left turn lane with 15m storage and 60m taper length.

East Access / County Road 93

Prior to Occupancy

- Remedial line painting to remove the southbound merging lane through the intersection and maximize the northbound lanes approaching the intersection.
 - It is recommended that the County monitor traffic volumes on County Road 93 as the planned road widening approaches, to consider the need for traffic signals in the future.
6. The West Access will operate efficiently as the new south leg of the four-legged signalized intersection at County Road 25 / Sundowner Road. A single ingress and egress lane will provide the necessary capacity to service the proposed development.
 7. The East Access will operate efficiently as a full-movement driveway, with one-way stop control for the egress movements. A single ingress and egress lane will provide the necessary capacity to service the proposed development. The optimal location will be confirmed through the detailed design process.
 8. The location of the proposed site access intersections are considered appropriate with respect to minimum driveway spacing requirements.
 9. The sight distance available for the proposed site access intersections are suitable for the intended use.
 10. In summary the proposed development will not cause any operational issues and will not add significant delay or congestion to the local roadway network.

Table of Contents

1	Introduction.....	8
1.1	Background.....	8
1.2	Study Area	8
1.3	Study Scope and Objectives	9
1.4	Horizon Year and Analysis Periods	10
2	Information Gathering.....	10
2.1	Street and Intersection Characteristics	10
2.2	Local Transportation Infrastructure Improvements.....	11
2.3	Transit Access	12
2.4	Development Growth.....	13
2.5	Background Traffic Growth	15
2.5.1	Population Growth and Projections	15
2.5.2	Traffic Volume Growth	15
2.5.3	Overall Background Growth Rate.....	15
2.6	Traffic Counts	15
2.7	Existing Traffic Volumes	16
2.8	Horizon Year Traffic Volumes.....	16
3	Intersection Operation without Proposed Development.....	16
3.1	Intersection Capacity Analysis Criteria	16
3.2	Existing (2025) Intersection Operation	17
3.3	Background (2028) Intersection Operation	19
3.4	Background (2033) Intersection Operation	20
3.5	Background (2038) Intersection Operation	21
4	Proposed Development Traffic Generation and Assignment	22
4.1	Traffic Generation	22
4.2	Traffic Assignment.....	23
4.3	Total Horizon Year Traffic Volumes with the Proposed Development	25
5	Intersection Operation with Proposed Development	25
5.1	Total (2028) Intersection Operation	25
5.2	Total (2033) Intersection Operation.....	27
5.3	Total (2038) Intersection Operation.....	29

5.4	Site Access & Intersection Spacing	31
5.4.1	West Access	31
5.4.2	East Access	31
5.5	Sight Distance Review	32
5.6	Emergency Access	33
6	Summary	33

List of Tables

Table 1 – Study Area Road Network	10
Table 2 – Traffic Count Data	15
Table 3 – Level of Service Criteria for Intersections.....	17
Table 4 - Existing (2025) LOS	18
Table 5 - Background (2028) LOS.....	19
Table 6 - Background (2033) LOS.....	20
Table 7 - Background (2038) LOS.....	21
Table 8 – Trip Generation Rates & Equations.....	22
Table 9 – Estimated Trip Generation of Proposed Development.....	23
Table 10 – Proposed Development Traffic Distribution - Residential.....	24
Table 11 – Proposed Development Traffic Distribution - Commercial	24
Table 12 - Total (2028) LOS	26
Table 13 - Total (2028) LOS + Improvements.....	27
Table 14 - Total (2033) LOS	28
Table 15 - Total (2038) LOS	30

List of Figures

Figure 1 – Proposed Site Location and Study Area	9
Figure 2 – Existing Intersection Lane Configuration within Study Area	11
Figure 3 – Study Area Transit Routes	13
Figure 4 – Adjacent Development Location	14
Figure 5 – Adjacent Development Traffic Volumes – 710 Balm Beach Road (50%)	35
Figure 6 – Existing (2025) Traffic Volumes	36
Figure 7 – Background (2028) Traffic Volumes.....	37
Figure 8 – Background (2033) Traffic Volumes.....	38
Figure 9 – Background (2038) Traffic Volumes.....	39
Figure 10 – Site Traffic Assignment – Block A-B (Residential)	40
Figure 11 – Site Traffic Assignment – Block A-B (Commercial - NET)	41
Figure 12 – Site Traffic Assignment – Block C (Residential)	42
Figure 13 – Site Traffic Assignment – Block C (Commercial – NET)).....	43
Figure 14 – Site Traffic Assignment – Block D-F (Residential)	44
Figure 15 – Site Traffic Assignment – TOTAL.....	45
Figure 16 – Total (2028) Traffic Volumes	46
Figure 17 – Total (2033) Traffic Volumes	47
Figure 18 – Total (2038) Traffic Volumes	48
Figure 19 – East Access Optimal Location	49

List of Appendices

APPENDIX A – Site Plan
APPENDIX B – Adjacent Development Excerpts
APPENDIX C – Traffic Count Data
APPENDIX D – Synchro Analysis Output – Existing Traffic Volumes
APPENDIX E – Synchro Analysis Output – Background Traffic Volumes
APPENDIX F – Transportation Tomorrow Survey Excerpt
APPENDIX G – Synchro Analysis Output – Total Traffic Volumes
APPENDIX H – MTO Left Turn Analysis
APPENDIX I – OTM Signal Justification Sheets
APPENDIX J – NCHRP Internal Recapture Sheets

1 Introduction

1.1 Background

2798860 Ontario Limited [the Developer] is proposing a mixed-use development, on a site municipally known as 659 Balm Beach Road East, located on the southwest corner of the County Road 93 / Balm Beach Road East intersection, Town of Midland [Town], County of Simcoe [County]. The report assesses the impact of traffic related to the development on the adjacent roadway and provides recommendations to accommodate this traffic in a safe and efficient manner.

The proposed development will include the following:

Block A-B

- 190 high-density units; and
- 3,800 m² (40,903 ft²) of ground floor commercial area.

Block C

- 130 high-density units; and
- 2,600 m² (27,986 ft²) of ground floor commercial area.

Block D-F

- 575 medium-density units.

Access to Blocks A-B and Blocks D-F will be provided via full-movement access onto County Road 25, opposite Sundowner Road (West) [West Access].

Access to Block C will be provided via full-movement access onto County Road 93 [East Access].

The Developer has retained **JD Engineering Inc.** [JD Engineering] to prepare this traffic impact study in support of the proposed development.

1.2 Study Area

Figure 1 illustrates the location of the subject site and study area intersections, in relation to the surrounding area. The Concept Site Plan provided by Innovative Planning Solutions (IPS) Inc. is included in **Appendix A**.

The subject site is bound by County Road 25 and Town owned lands to the north, County Road 93 to the east and undeveloped lands to the south and west.

Through consultation with the Town and the County, the following intersections will be analysed as part of the study:

- County Road 93 / County Road 25 & Yonge Street;
- County Road 25 / Wilson Road & Marshall Road;
- County Road 25 / West Access & Sundowner Road; and
- County Road 93 / East Access.

Figure 1 – Proposed Site Location and Study Area



1.3 Study Scope and Objectives

The purpose of this study is to identify the potential impacts to traffic flow at the site accesses and on the surrounding roadway network. The study analysis includes the following tasks:

- Consult with the Town and County to address any traffic-related issues or concerns they have with the proposed development;
- Determine existing traffic volumes and circulation patterns;
- Estimate future traffic volumes if the proposed development was not constructed, including the impact of additional proposed developments in the area;
- Estimate the amount of traffic that would be generated by the proposed development and assign to the roadway network;
- Complete level-of-service [LOS] analysis of horizon year (without the proposed development) traffic conditions and identify operational deficiencies;
- Estimate the amount of traffic that would be generated by the proposed development and assign to the roadway network;
- Complete LOS analysis of horizon year (with the proposed development) traffic conditions and identify additional operational deficiencies;
- Identify improvement options to address operational deficiencies;
- Review the proposed configuration of the Site Access driveways; and
- Document findings and recommendations in a final report.

1.4 Horizon Year and Analysis Periods

Traffic scenarios for the existing (2025) year, buildout horizon year (2028), 5-year post buildout horizon year (2033), and 10-year post buildout horizon year (2038) were selected for analysis of traffic operations in the study area. The weekday morning [AM] and afternoon [PM] peak hours have been selected as the analysis periods for this study.

2 Information Gathering

2.1 Street and Intersection Characteristics

The study area road network is summarized in **Table 1**.

Table 1 – Study Area Road Network


Road	Classification	Cross-Section	Direction	Speed (km/h)	Sidewalk (side of road)	Jurisdiction
County Road 93	Primary Arterial	2/4-lane ¹	N-S	60	E & W ²	County
County Road 25	Secondary	2-lane	E-W	60/80	N	County
Yonge Street	Arterial	3-lane	E-W	50	N	Town
Wilson Road	Local	2-lane	N-S	60	-	Town
Marshall Road	Local	2-lane	N-S	60	-	Town

¹Approximately 550 metres south of County Road 25 / Yonge Street, County Road 93 transitions to a two-lane platform.

²County Road 93 has an urban cross-section with sidewalk on both sides of the road, north of County Road 25 / Yonge Street. To the south, County Road 93 has a rural cross-section with asphalt shoulders.

The existing intersection spacing and lane configuration within the study area is illustrated in **Figure 2**.

Figure 2 – Existing Intersection Lane Configuration within Study Area

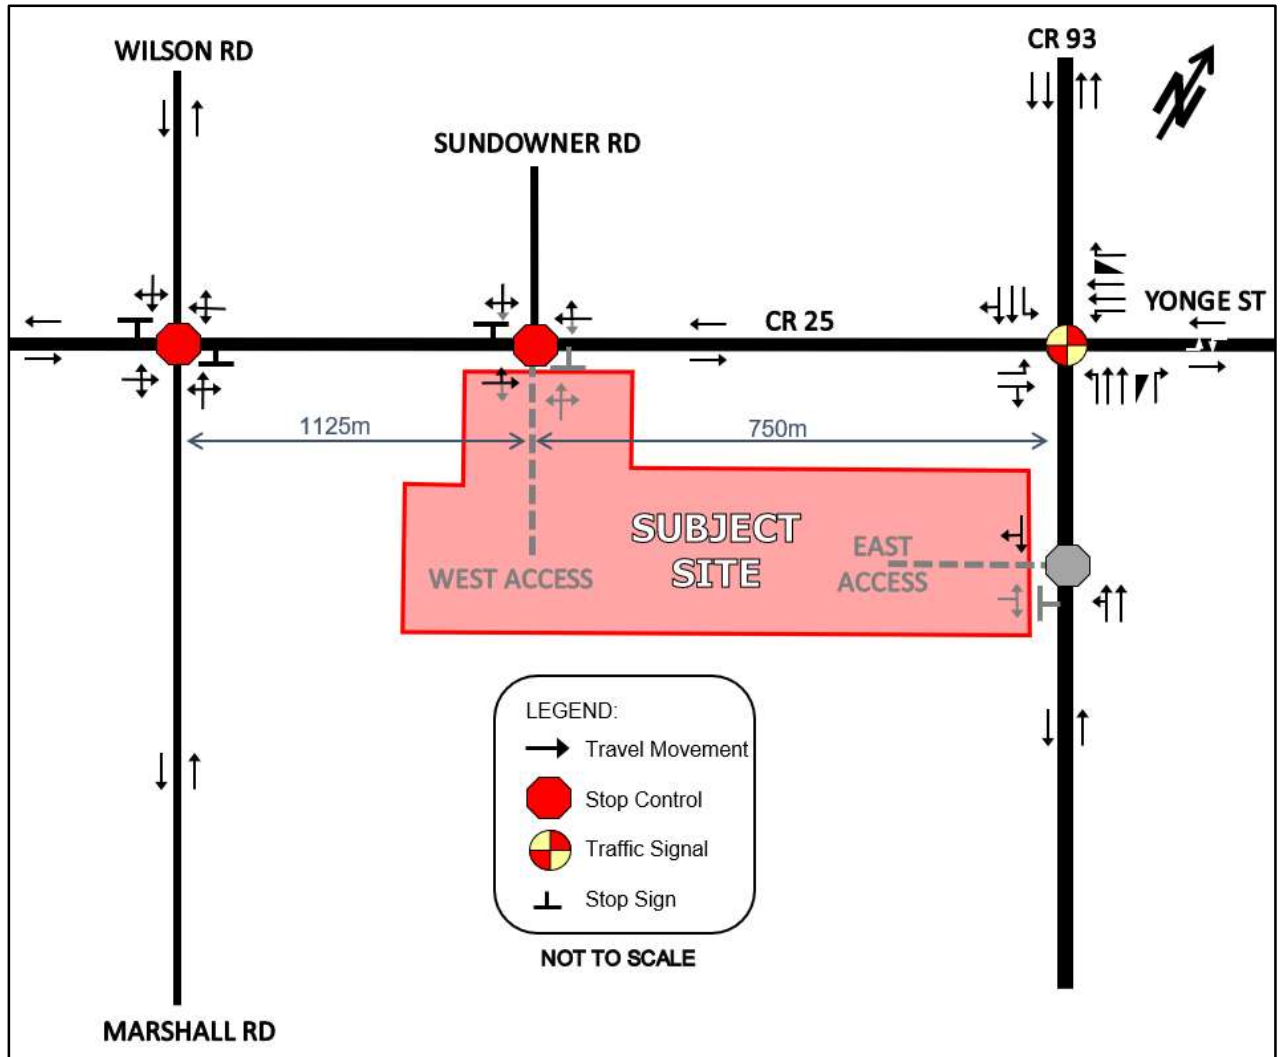

2.2 Local Transportation Infrastructure Improvements

Based on our review of the County's Transportation Master Plan: Phase 3 (September 2023) [County TMP], the County's 2024 Capital Budget, the County's 2024 Asset Management Plan, the Town's 2025 Capital Budget, and the Town's Official Plan, the following infrastructure improvements have been identified within the study area:

County Road 93 (County Road 25 to Highway 12)

- Road widening from 2 to 4 lanes, including bicycle lanes (by 2041)

County Road 25 (west of Sundowner Road)

- Construction of multi-use trail (unknown timeline)

Yonge Street (County Road 93 to King Street)

- Reconstruction of the road, including dedicated bike lanes or multi use trail (2025 start date)

Sundowner Road

- Implement on-street bicycle route (sharrows)

There are no other planned infrastructure improvements within the study area that would impact the local traffic volumes or traffic distribution.

2.3 Transit Access

Mid-Pen Transit service provides one transit route within the subject area. The Midland bus route provides bus service to various points of interest within the Town travelling along Yonge Street (to downtown area), County Road 93 and provides connections to the Town's major destinations to the east and south along King Street.

LINX Transit provides one bus route within the subject site area. The Penetanguishene bus route provides service along county Road 93, Thompson Road and Robert Street and to major destinations in Penetanguishene.

Both bus routes are connected within a transfer zone at the Mountain Mall and Huronia Mall, east of the subject site, providing a shared service route that allows travelers to connect to LINX Transit service and to major urban hubs in the County (Georgian Bay General Hospital, Village Square Mall, Waypoint Centre Penetanguishene, etc.).


The Midland bus route operates between 07:15 – 17:45 on weekdays and 08:45 – 16:45 on Saturdays with service every 60 minutes. There is no bus service on Sundays or Holidays.

The Penetanguishene bus route operates between 06:25 – 17:25 on weekdays and 08:25 – 16:25 on Saturdays with service every 60 minutes. There is no bus service on Sundays or Holidays.

Both bus routes provide a “flag on” service where passengers are not required to be at a bus stop and can flag down the bus along its route to get on the bus.

Figure 3 illustrates the transit service within the study area.

Figure 3 – Study Area Transit Routes

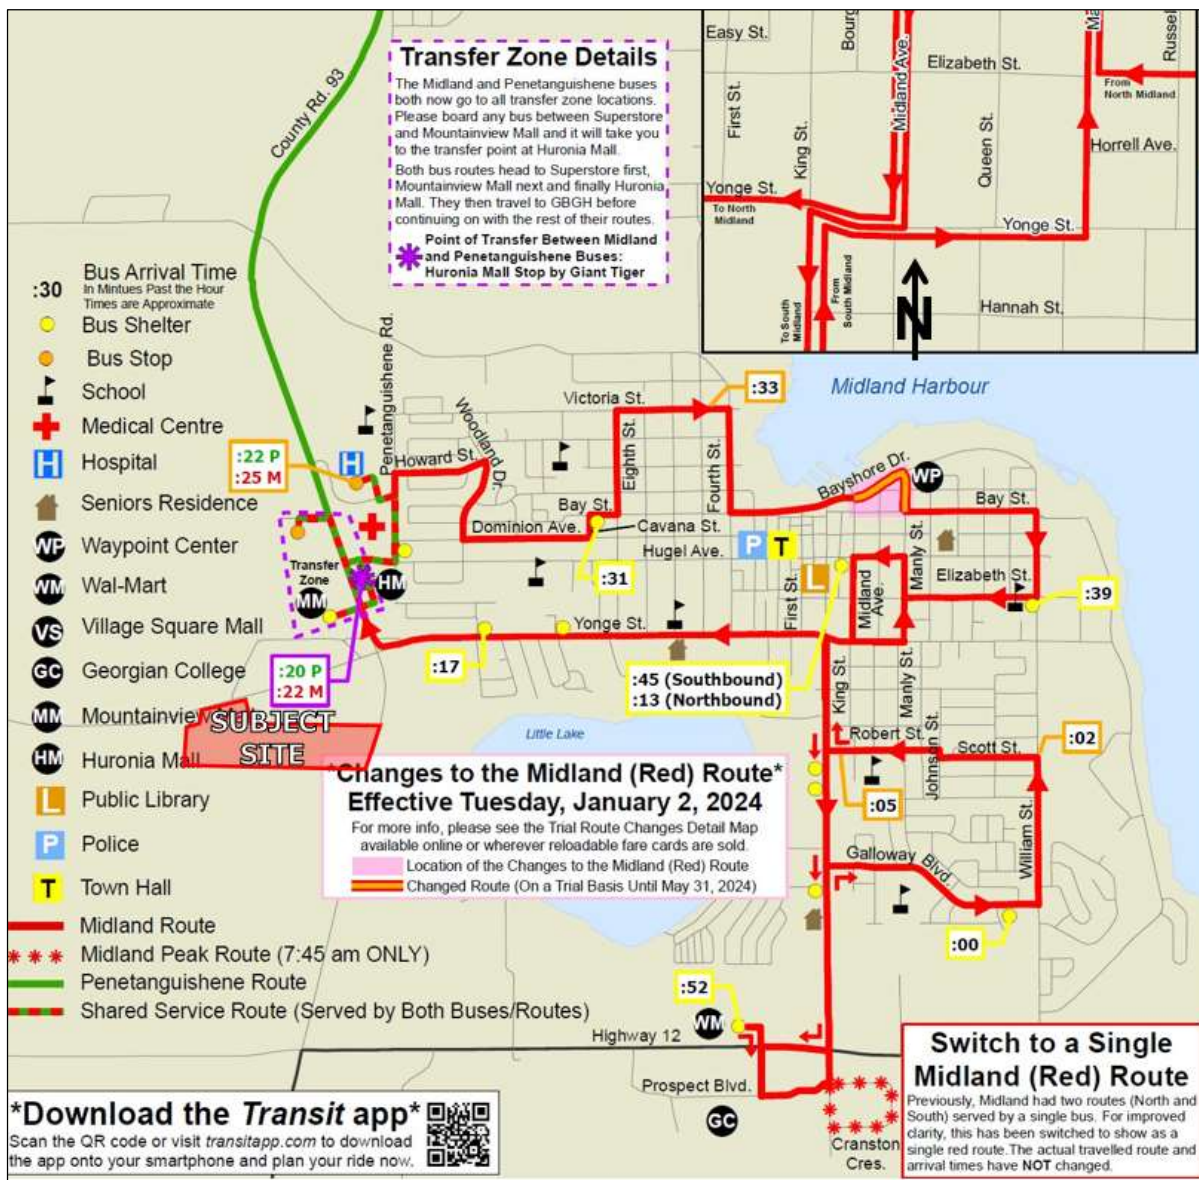

2.4 Development Growth

In review of the Town's development information and through discussions with Town planning staff, the following developments have been noted for consideration with respect to impacts on the local traffic volumes / infrastructure capacity:

- 9281 County Road 93
 - Single-storey, 132m² (1,417 ft²) commercial building;
- 710 Balm Beach Road
 - 3,706m² (39,996 ft²) Office;
 - 889m² (9,566 ft²) Medical Office;

- 2,726m² (29,337 ft²) Retail;
- 484m² (5,208 ft²) Daycare; and
- 68 Residential Units.

Figure 4 illustrates the location of the above developments in relation to the subject site.

Figure 4 – Adjacent Development Location



At the time of this study, the 9281 County Road 93 development is currently built-out and operational. Consequently, the traffic volumes generated by the development have captured in the conducted traffic counts. No additional consideration is required.

Traffic generated by the 710 Balm Beach Road development has been estimated based on the *Proposed Mixed-Use Development at 710 Balm Beach Road, Town of Midland – Traffic Impact Study* (WSP Inc., October, 2023) [710 Balm Beach TIS] (Excerpts provided in **Appendix B**).

Similar to the 9281 County Road 93 development, the 710 Balm Beach Road development is currently built-out and partially operational. At the time of this study, the development is estimated to be operating

at 50% occupancy. Consequently, the traffic generation estimated in the 710 Balm Beach TIS has been applied at a 50% reduction. It has been assumed that the remaining occupancy will occur by the 2028 horizon year.

The assignment of the adjacent development traffic volumes through the study area road network is illustrated in **Figure 5**.

2.5 Background Traffic Growth

2.5.1 Population Growth and Projections

The County TMP projected a population growth from 314,580 in 2016 to 555,020 in 2051, translating to an average annual increase of 1.6%. Over the same period the Town's population is projected to grow from 17,290 in 2016 to 24,290 in 2051, translating to an average annual increase of 1.0%.

2.5.2 Traffic Volume Growth

Historic traffic volumes were obtained from the County for the segments of County Road 93 between Highway 12 to County Road 25 and County Road 25 to Hugel Avenue. The Annual Average Daily Traffic (AADT) volumes on County Road 93 for the period of 2015 to 2021 show an annual increase of 1.6% to 1.9%.

Historic traffic volumes were obtained from the County for the segments of County Road 25 between County Road 93 and 2nd Concession Road 2. The Annual Average Daily Traffic (AADT) volumes on County Road 25 for the period of 2017 to 2022 show an annual increase of 1.6%.

2.5.3 Overall Background Growth Rate

Considering the above historical population and traffic growth and based, a background traffic growth rate of 2.0% per annum has been utilized for County Road 93, County Road 25 and Yonge Street. A growth rate of 1.0% per annum has been utilized for Wilson Road and Marshall Road. No growth has been applied to Sundowner Road.

2.6 Traffic Counts

Detailed turning movement traffic and pedestrian counts were commissioned and obtained by JD Engineering at the study intersections. **Table 2** summarizes the traffic count data collection information.

Table 2 – Traffic Count Data

Intersection (N-S Street / E-W Street)	Count Date	AM Peak Hour	PM Peak Hour	Source
County Road 93 / County Road 25 & Yonge Street	Tuesday, November 5 th , 2024	07:45 – 08:45	16:00 – 17:00	JD Eng.*
County Road 25 / Wilson Road & Marshall Road		08:00 – 09:00	16:00 – 17:00	JD Eng.*
County Road 25 / West Access & Sundowner Road		08:00 – 09:00	16:00 – 17:00	JD Eng.*

*Counts were completed by Accu -Traffic Inc. on behalf of JD Engineering.

Detailed traffic count data can be found in **Appendix C**.

2.7 Existing Traffic Volumes

The 2025 existing AM and PM peak hour traffic volumes in the study area are illustrated in **Figure 6**, established based on the conducted traffic counts, adjusted to reflect the annual background growth rate noted in Section 2.5.

2.8 Horizon Year Traffic Volumes

The background (2028, 2033 and 2038) horizon year traffic volumes are illustrated in **Figure 7** through **Figure 9**. The background volumes are based on the conducted traffic counts noted in section 2.6, adjusted to reflect the annual background growth rate noted in Section 2.5 and the traffic volumes generated by the noted adjacent developments as noted in Section 2.4.

3 Intersection Operation without Proposed Development

3.1 Intersection Capacity Analysis Criteria

Intersection performance was measured using the traffic analysis software, Synchro 12, a deterministic model that employs Highway Capacity Manual and Intersection Capacity Utilization methodologies for analysing intersection operations. These procedures are accepted by provincial and municipal agencies throughout North America.

Synchro 12 enables the study area to be graphically defined in terms of streets and intersections, along with their geometric and traffic control characteristics. The user is able to evaluate both signalized and unsignalized intersections in relation to each other, thus not only providing level of service for the individual intersections, but also enabling an assessment of the impact the various intersections in a network have on each other in terms of spacing, traffic congestion, delay, and queuing.

The intersection operations were also evaluated in terms of the LOS. LOS is a common measure of the quality of performance at an intersection and is defined in terms of vehicular delay. This delay includes deceleration delay, queue move-up time, stopped delay, and acceleration delay. LOS is expressed on a scale of A through F, where LOS A represents very little delay (i.e. less than 10 seconds per vehicle) and LOS F represents very high delay (i.e. greater than 50 seconds per vehicle for a stop sign controlled intersection and greater than 80 seconds per vehicle for a signalized intersection).

The LOS criteria for signalized and stop sign-controlled intersections are shown in **Table 3**. A description of traffic performance characteristics is included for each LOS.

Table 3 – Level of Service Criteria for Intersections

LOS	LOS Description	Control Delay (seconds per vehicle)	
		Signalized Intersections	Stop Controlled Intersections
A	Very low delay; most vehicles do not stop (Excellent)	less than 10.0	less than 10.0
B	Higher delay; more vehicles stop (Very Good)	between 10.0 and 20.0	between 10.0 and 15.0
C	Higher level of congestion; number of vehicles stopping is significant, although many still pass through intersection without stopping (Good)	between 20.0 and 35.0	between 15.0 and 25.0
D	Congestion becomes noticeable; vehicles must sometimes wait through more than one red light; many vehicles stop (Satisfactory)	between 35.0 and 55.0	between 25.0 and 35.0
E	Vehicles must often wait through more than one red light; considered by many agencies to be the limit of acceptable delay	between 55.0 and 80.0	between 35.0 and 50.0
F	This level is considered to be unacceptable to most drivers; occurs when arrival flow rates exceed the capacity of the intersection (Unacceptable)	greater than 80.0	greater than 50.0

3.2 Existing (2025) Intersection Operation

The results of the LOS analysis under existing (2025) traffic volumes during the AM and PM peak hours can be found below in **Table 4**. Existing intersection geometry and traffic control have been utilized for this scenario. Detailed output of the Synchro analysis can be found in **Appendix D**.

Table 4 - Existing (2025) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.41	18.3	B	-	-	0.59	19.9	B	-	-
EBL	0.43	22.5	C	70	26	0.46	22.1	C	70	28
EBTR	0.39	22.7	C	-	-	0.40	22.2	C	-	-
WBL	0.53	32.5	C	120	23	0.55	32.1	C	120	25
WBT	0.44	30.3	C	-	-	0.60	32.5	C	-	-
WBR	0.08	27.7	C	110	9	0.16	27.3	C	110	9
NBL	0.15	11.4	B	200	10	0.20	12.7	B	200	13
NBT	0.27	15.1	B	-	-	0.38	17.4	B	-	-
NBR	0.06	13.5	B	125	4	0.07	14.8	B	125	6
SBL	0.25	10.7	B	80	14	0.57	14.8	B	80	36
SBT	0.35	15.2	B	-	-	0.35	16.4	B	-	-
SBR	0.08	13.1	B	80	4	0.11	14.5	B	80	13
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	5.1	A	-	-	-	5.2	A	-	-
EB	0.04	1.3	A	-	-	0.03	1.2	A	-	-
WB	0.00	0.3	A	-	-	0.01	0.2	A	-	-
NB	0.16	16.0	C	-	-	0.28	19.0	C	-	-
SB	0.31	18.0	C	-	-	0.33	19.2	C	-	-
West Access & Sundowner Rd / County Rd 25 (unsignalized)	-	0.8		-	-	-	1.2	A	-	-
EB	0.01	0.6	A	-	-	0.01	0.04	A	-	-
WB	0.00	0.0	A	-	-	0.00	0.0	-	-	-
NB	0.00	0.0	A	-	-	0.02	16.0	C	-	-
SB	0.04	11.9	B	-	-	0.09	11.2	B	-	-

The results of the LOS analysis indicate that the intersection movements are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the turning movements at the County Road 93 / County Road 25 & Yonge Street intersection can be accommodated by the existing auxiliary lane storage lengths.

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the Ontario Ministry of Transportation Design Supplement for TAC Geometric Design Guide for Canadian Roads June 2017 [MTO DS]. According to the above-noted criteria, left turn lanes are not warranted at the unsignalized intersections (results provided in **Appendix H**).

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the unsignalized intersections (results are provided in **Appendix I**).

No infrastructure improvements are recommended within the study area.

3.3 Background (2028) Intersection Operation

The results of the LOS analysis under background (2028) traffic volumes during the AM and PM peak hours can be found below in **Table 5**. Existing intersection geometry and traffic control have been utilized for this scenario. Detailed output of the Synchro analysis can be found in **Appendix E**.

Table 5 - Background (2028) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.47	18.8	B	-	-	0.69	21.1	C	-	-
EBL	0.55	24.3	C	70	32	0.63	26.7	C	70	35
EBTR	0.42	22.8	C	-	-	0.47	22.6	C	-	-
WBL	0.55	32.9	C	120	24	0.55	32.0	C	120	26
WBT	0.49	30.6	C	-	-	0.63	33.0	C	-	-
WBR	0.09	27.5	C	110	10	0.21	27.3	C	110	11
NBL	0.19	11.9	B	200	12	0.25	13.5	B	200	15
NBT	0.29	15.6	B	-	-	0.41	18.5	B	-	-
NBR	0.07	13.9	B	125	5	0.08	15.4	B	125	8
SBL	0.27	11.0	B	80	15	0.64	18.0	B	80	51
SBT	0.38	15.8	B	-	-	0.38	17.4	B	-	-
SBR	0.12	13.7	B	80	5	0.14	15.3	B	80	14
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	5.6	A	-	-	-	5.8	A	-	-
EB	0.04	1.3	A	-	-	0.03	1.2	A	-	-
WB	0.00	0.2	A	-	-	0.01	0.3	A	-	-
NB	0.19	17.0	C	-	-	0.32	21.0	C	-	-
SB	0.36	19.9	C	-	-	0.39	22.2	C	-	-
West Access & Sundowner Rd / County Rd 25 (unsignalized)	-	1.4		-	-	-	2.1	A	-	-
EB	0.02	0.8	A	-	-	0.01	0.5	A	-	-
WB	0.00	0.0	A	-	-	0.00	0.0	-	-	-
NB	0.00	0.0	A	-	-	0.02	17.5	C	-	-
SB	0.11	15.0	C	-	-	0.21	14.7	B	-	-

The results of the LOS analysis indicate that the intersection movements are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the turning movements at the County Road 93 / County Road 25 & Yonge Street intersection can be accommodated by the existing auxiliary lane storage lengths

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the MTO DS. According to the above-noted criteria, left turn lanes are not warranted at the unsignalized intersections (results provided in **Appendix H**).

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the unsignalized intersections (results are provided in **Appendix I**).

No infrastructure improvements are recommended within the study area.

3.4 Background (2033) Intersection Operation

The results of the LOS analysis under background (2033) traffic volumes during the AM and PM peak hours can be found below in **Table 6**. Existing intersection geometry and traffic control have been utilized for this scenario. Detailed output of the Synchro analysis can be found in **Appendix E**.

Table 6 - Background (2033) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.51	19.4	B	-	-	0.80	22.8	C	-	-
EBL	0.58	25.1	C	70	34	0.69	30.3	C	70	37
EBTR	0.45	22.9	C	-	-	0.50	22.8	C	-	-
WBL	0.58	33.8	C	120	26	0.59	33.3	C	120	28
WBT	0.51	30.6	C	-	-	0.66	33.5	C	-	-
WBR	0.10	27.3	C	110	11	0.35	28.1	C	110	18
NBL	0.23	12.4	B	200	13	0.29	14.2	B	200	17
NBT	0.32	16.3	B	-	-	0.46	19.6	B	-	-
NBR	0.07	14.3	B	125	6	0.09	16.0	B	125	10
SBL	0.31	11.6	B	80	17	0.78	26.7	C	80	62
SBT	0.42	16.7	B	-	-	0.43	18.4	B	-	-
SBR	0.13	14.1	B	80	5	0.15	15.9	B	80	15
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	6.2	A	-	-	-	6.7	A	-	-
EB	0.04	1.3	A	-	-	0.03	1.1	A	-	-
WB	0.00	0.2	A	-	-	0.01	0.3	A	-	-
NB	0.23	18.8	C	-	-	0.37	23.9	C	-	-
SB	0.42	23.0	C	-	-	0.47	26.9	D	-	-
West Access & Sundowner Rd / County Rd 25 (unsignalized)	-	1.4		-	-	-	2.1	A	-	-
EB	0.02	0.7	A	-	-	0.01	0.5	A	-	-
WB	0.00	0.0	A	-	-	0.00	0.0	-	-	-
NB	0.00	0.0	A	-	-	0.02	18.9	C	-	-
SB	0.12	16.0	C	-	-	0.23	15.8	C	-	-

The results of the LOS analysis indicate that the intersection movements are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the turning movements at the County Road 93 / County Road 25 & Yonge Street intersection can be accommodated by the existing auxiliary lane storage lengths

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the MTO DS. According to the above-noted criteria, an eastbound left turn lane is marginally warranted at the County Road 25 / Wilson Road & Marshall Road intersection (results provided in **Appendix H**). The trigger for the left turn lane improvement occurs as a result of the traffic growth on the County Road 25 corridor, as the advancing and opposing volumes at the intersection begin to exceed the nomograph threshold. In this case, it is recommended that the Town and County continue to monitor the traffic growth at the intersection to confirm the need and timing for the left turn lane improvement. For the purpose of this study, the current configuration has been carried through the future year analyses.

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the unsignalized intersections (results are provided in **Appendix I**).

No infrastructure improvements are recommended within the study area.

3.5 Background (2038) Intersection Operation

The results of the LOS analysis under background (2038) traffic volumes during the AM and PM peak hours can be found below in **Table 7**. Existing intersection geometry and traffic control have been utilized for this scenario. Minor signal timing improvement (cycle length increase from 100s to 110s) and optimization has been applied to the PM peak hour, to ensure acceptable operations. Detailed output of the Synchro analysis can be found in **Appendix E**.

Table 7 - Background (2038) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.56	20.1	C	-	-	0.82	27.8	C	-	-
EBL	0.61	26.3	C	70	37	0.77	39.2	D	70	46
EBTR	0.48	23.1	C	-	-	0.53	26.2	C	-	-
WBL	0.61	35.3	D	120	29	0.65	39.7	D	120	35
WBT	0.52	30.5	C	-	-	0.69	38.5	D	-	-
WBR	0.11	27.0	C	110	11	0.20	30.4	C	110	9
NBL	0.28	13.1	B	200	15	0.31	17.5	B	200	21
NBT	0.36	17.2	B	-	-	0.61	29.0	C	-	-
NBR	0.08	14.8	B	125	8	0.10	22.4	C	125	13
SBL	0.37	12.3	B	80	19	0.75	22.1	C	80	75
SBT	0.47	17.9	B	-	-	0.50	23.7	C	-	-
SBR	0.14	14.7	B	80	5	0.17	19.9	B	80	17
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	7.1	A	-	-	-	8.2	A	-	-
EB	0.04	1.3	A	-	-	0.04	1.2	A	-	-
WB	0.01	0.2	A	-	-	0.01	0.3	A	-	-
NB	0.27	2.1	C	-	-	0.44	28.7	D	-	-
SB	0.50	27.7	D	-	-	0.57	34.8	D	-	-
West Access & Sundowner Rd / County Rd 25 (unsignalized)	-	1.4		-	-	-	2.1	A	-	-
EB	0.02	0.7	A	-	-	0.01	0.5	A	-	-
WB	0.00	0.0	A	-	-	0.00	0.0	-	-	-
NB	0.00	0.0	A	-	-	0.03	20.7	C	-	-
SB	0.13	17.2	C	-	-	0.25	17.2	C	-	-

The results of the LOS analysis indicate that the intersection movements are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the turning movements at the County Road 93 / County Road 25 & Yonge Street intersection can be accommodated by the existing auxiliary lane storage lengths

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the MTO DS. According to the above-noted criteria, an eastbound

left turn lane is marginally warranted at the County Road 25 / Wilson Road & Marshall Road intersection (results provided in **Appendix H**). The trigger for the left turn lane improvement occurs as a result of the traffic growth on the County Road 25 corridor, as the advancing and opposing volumes at the intersection begin to exceed the nomograph threshold. In this case, it is recommended that the Town and County continue to monitor the traffic growth at the intersection to confirm the need and timing for the left turn lane improvement. For the purpose of this study, the current configuration has been carried through the future year analyses.

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the unsignalized intersections (results are provided in **Appendix I**).

No infrastructure improvements are recommended within the study area.

4 Proposed Development Traffic Generation and Assignment

4.1 Traffic Generation

The traffic generation for the proposed development has been based on data provided in the Institute of Transportation Engineers [ITE] *Trip Generation Manual* (11th Edition) [ITE Trip Generation Manual]. The following ITE land uses have been applied to estimate the traffic from the proposed development:

- ITE land use 220 (Multi-Family Housing Low-rise) – General Urban / Suburban Setting;
- ITE land use 221 (Multi-Family Housing Mid-rise) – General Urban / Suburban Setting; and
- ITE land use 822 (Strip Retail Plaza (<40k)) – General Urban / Suburban Setting.

At the time of this study, the proposed plan of development provides an overall residential density target for each development block. It is our understanding that the commercial/retail areas in Blocks A-B and Block C will be encompassed on the ground floor of each of the high-density residential buildings. Based on our review of similar mixed-use developments, ground floor commercial/retail area GFA is typically within the range of 10% to 15% of the total lot area. In order to provide a conservative approach, the total commercial/retail GFA of Blocks A-B and Block C have been estimated at 20% of the total lot areas.

The utilized traffic rates and estimated trip generation for the proposed development is illustrated below in **Table 8**.

Table 8 – Trip Generation Rates & Equations

Land Use	Trip Basis	AM Peak Hour			PM Peak Hour		
		IN	OUT	TOTAL	IN	OUT	TOTAL
Multi-Family Housing – Low Rise ITE Land Use: 220	equation (units)	$T = 0.31(X) + 22.85$			$T = 0.43(X) + 20.55$		
	distribution	24%	76%	100%	63%	37%	100%
Multi-Family Housing – Mid Rise ITE Land Use: 221	equation (units)	$T = 0.44(X) - 11.61$			$T = 0.39(X) + 0.34$		
	distribution	23%	77%	100%	61%	39%	100%
Strip Plaza (<40K) ITE Land Use: 822	equation (1,000 ft ² GFA)	$\ln(T) = 0.66 \ln(X) + 1.84$			$\ln(T) = 0.71 \ln(X) + 2.72$		
	distribution	60%	40%	100%	50%	50%	100%

Table 9 – Estimated Trip Generation of Proposed Development

Land Use	Size	AM Peak Hour			PM Peak Hour		
		IN	OUT	TOTAL	IN	OUT	TOTAL
Block A-B							
Multifamily Housing (Mid-Rise) ITE Land Use: 221	190 units	17	55	72	45	29	74
Strip Plaza (<40K) ITE Land Use: 822	40,903 ft²	44	29	73	106	106	212
Total Trip Generation		61	84	145	151	135	286
Internal Recapture*		-1	-1	-2	-32	-32	-64
Net Vehicle Trip Generation		60	83	143	119	103	222
Pass-by Trips**		-	-	-	-36	-36	-70
Primary Vehicle Trips		60	83	143	83	57	150
Block C							
Multifamily Housing (Mid-Rise) ITE Land Use: 221	130 units	10	36	46	31	20	51
Strip Plaza (<40K) ITE Land Use: 822	27,986 ft²	34	23	57	81	81	162
Total Trip Generation		44	59	103	112	101	213
Internal Recapture*		-1	-1	-2	-32	-32	-64
Net Vehicle Trip Generation		43	58	101	80	69	149
Pass-by Trips**		0	0	0	-26	-26	-52
Primary Vehicle Trips		43	58	101	54	43	97
Block D-F							
Multifamily Housing (Low-Rise) ITE Land Use: 220	575 units	48	153	175	185	108	293
Primary Vehicle Trips		48	153	175	185	108	293
Subject Site - Total							
Primary Vehicle Trips		151	294	445	322	218	540

* The internal capture rates have been calculated using the National Cooperative Highway Research Program (NCHRP) 8-51 Estimation Tool. Internal capture reports are provided in **Appendix J**.

** Pass-by trips for the Clinic trips have been established based on data published in the ITE Trip Generation Manual, 11th Edition ITE for land use code 821 (Shopping Plaza (40-150K)). A 0% AM / 40% PM pass by rate has been utilized for the AM and PM peak hours, respectively.

No transportation modal split has been applied to the above-noted traffic generation calculation.

4.2 Traffic Assignment

The distribution of traffic for the residential component of the proposed development has been calculated based on the 2022 Transportation Tomorrow Survey [TTS] data for traffic zone 8577 retrieved using the TTS Internet Data Retrieval System [IDRS] (output attached as **Appendix F**). TTS data provides historical origin and destination trip percentages for specific areas within the Town and the GTHA.

Traffic distribution for the trips generated by the residential component of the proposed development during the AM and PM peak hour are expected to generally follow commuter travel patterns. Our analysis is based on egress traffic during the AM peak hour. Logically, the distribution of ingress traffic will follow the inverse of the exiting traffic distribution. For each of the individual areas identified in the TTS data, we have selected the probable route of travel, assuming that people will select their route primarily based on travel time.

The distribution of traffic for the residential component of the proposed development is illustrated in **Table 10** using the methodology outlined above.

Table 10 – Proposed Development Traffic Distribution - Residential

Travel Direction (to/from)	Percent of Total Traffic Generation
North via County Road 93	16%
South via County Road 93	38%
East via Yonge Street	23%
West via County Road 93	19%
North via Marshall Road	3%
South via Wilson Road	1%
Total	100%

The distribution of traffic for the commercial component of the proposed development is based on the distribution of the existing traffic volume patterns within the study area. **Table 11** summarizes the distribution of ingress and egress traffic for the commercial component of the proposed development.

Table 11 – Proposed Development Traffic Distribution - Commercial

Travel Direction (to / from)	Percent of Total Traffic Generation			
	AM		PM	
	IN	OUT	IN	OUT
North via County Road 93	31%	34%	37%	33%
South via County Road 93	27%	29%	27%	25%
East via Yonge Street	16%	20%	18%	21%
West via County Road 93	17%	9%	10%	14%
North via Marshall Road	2%	5%	4%	2%
South via Wilson Road	6%	4%	4%	5%
TOTAL	100%	100%	100%	100%

The site traffic assignment for the site trips during the AM and PM peak hour is illustrated in **Figure 10** through **Figure 15**.

4.3 Total Horizon Year Traffic Volumes with the Proposed Development

For the total (2028, 2033 and 2038) horizon year traffic volumes, the proposed development traffic was added to the background (2028, 2033 and 2038) traffic volumes. The resulting total (2028, 2033 and 2038) horizon year traffic volume for the AM and PM peak hour are illustrated in **Figure 16** through **Figure 18**.

5 Intersection Operation with Proposed Development

5.1 Total (2028) Intersection Operation

The results of the LOS analysis under total (2028) traffic volumes during the AM and PM peak hours can be found below in **Table 12**. Existing intersection geometry and traffic control have been utilized for this scenario. Stop control has been assumed for the Site Access egress movements. Detailed output of the Synchro analysis can be found in **Appendix G**.

Table 12 - Total (2028) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.56	21.0	C	-	-	0.79	24.2	C	-	-
EBL	0.66	27.6	C	70	40	0.80	39.2	D	70	44
EBTR	0.69	27.4	C	-	-	0.61	23.9	C	-	-
WBL	0.60	34.8	C	120	27	0.57	31.1	C	120	29
WBT	0.50	29.6	C	-	-	0.69	33.3	C	-	-
WBR	0.09	26.5	C	110	10	0.24	26.0	C	110	14
NBL	0.34	12.9	B	200	20	0.59	19.1	B	200	35
NBT	0.31	16.8	B	-	-	0.45	21.0	C	-	-
NBR	0.07	14.9	B	125	6	0.08	17.4	B	125	10
SBL	0.27	12.5	B	80	16	0.71	24.3	C	80	53
SBT	0.42	18.0	B	-	-	0.44	20.8	C	-	-
SBR	0.14	15.5	B	80	5	0.18	18.4	B	80	17
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	5.9	A	-	-	-	7.6	A	-	-
EB	0.04	1.3	A	-	-	0.03	1.1	A	-	-
WB	0.01	0.4	A	-	-	0.01	0.4	A	-	-
NB	0.21	18.5	C	-	-	0.39	25.3	D	-	-
SB	0.43	24.5	C	-	-	0.55	34.2	D	-	-
West Access & Sundowner Rd / County Rd 25 (unsignalized)	-	9.3		-	-	-	149.1	F	-	-
EB	0.02	0.8	A	-	-	0.01	0.4	A	-	-
WB	0.11	3.5	A	-	-	0.24	5.4	A	-	-
NB	0.61	25.5	D	-	-	1.97	490.6	F	-	240
SB	0.32	43.7	E	-	-	1.06	193.4	F	-	50
East Access / County Rd 93 (unsignalized)	-	1.8	A	-	-	-	2.1	A	-	-
EB	0.40	3.8	D	-	9	0.46	37.5	E	-	17
NBTL	0.02	0.9	A	-	1	0.03	1.0	A	-	1
NB	0.24	0.0	-	-	1	0.35	0.0	-	-	-
SB	0.52	0.0	-	-	-	0.47	0.0	-	-	-

The results of the LOS analysis indicate that the majority of the intersection movements at the study intersections are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the turning movements at the County Road 93 / County Road 25 & Yonge Street intersection can be accommodated by the existing auxiliary lane storage lengths.

During the PM peak hour, the West Access & Sundowner Road / County Road 25 intersection will experience failing levels-of-service and long delays. Based on the Ontario Traffic Manual Book 12 Signal Justification, traffic signals are not warranted at the intersection (results are provided in **Appendix I**). Notwithstanding, given the long control delay for northbound and southbound movements, it is recommended that traffic signals be installed at the West Access & Sundowner Road / County Road 25 intersection during the first phase of construction. The implementation of traffic signals will also facilitate pedestrian connectivity for the Subject Site, giving residents the ability to cross County Road 25 and utilize the sidewalk on the north side of the road.

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the MTO DS. According to the above-noted criteria, an eastbound left turn lane is marginally warranted at the County Road 25 / Wilson Road & Marshall Road intersection (results provided in **Appendix H**). The trigger for the left turn lane improvement occurs as a result of the traffic growth on the County Road 25 corridor, as the advancing and opposing volumes at the intersection begin to exceed the nomograph threshold. In this case, it is recommended that the Town and County continue to monitor the traffic growth at the intersection to confirm the need and timing for the left turn lane improvement. For the purpose of this study, the current configuration has been carried through the future year analyses.

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the remaining unsignalized intersections (results are provided in **Appendix I**).

The total (2028) traffic volumes have been reanalyzed to consider the following improvements:

West Access & Sundowner Road / County Road 25

- Provision of traffic signals with semi-actuated control (cycle length of 60 seconds);
- The implementation of an exclusive westbound left turn lane with 30m storage and 60m taper length; and
- The implementation of an exclusive eastbound left turn lane with 15m storage and 60m taper length.

Table 13 illustrates the results of the LOS analysis with the above noted improvements. Detailed output of the Synchro analysis can be found in **Appendix E**.

Table 13 - Total (2028) LOS + Improvements

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
West Access & Sundowner Rd / County Rd 25 (signalized)	0.46	17.3	B	-	-	0.66	16.1	B	-	-
EBL	0.09	15.3	B	15	7	0.04	12.7	B	15	5
EBTR	0.79	25.6	C	-	-	0.59	19.4	B	-	-
WBL	0.41	12.1	B	30	11	0.52	7.9	A	30	27
WBR	0.36	11.5	B	-	-	0.35	7.4	A	-	-
NB	0.23	11.8	B	-	-	0.76	26.6	C	-	-
SB	0.04	10.2	B	-	-	0.08	15.1	B	-	-

The results of the LOS analysis indicate the West Access & Sundowner Road / County Road 25 intersection will operate within the typical design limits noted in Section 3.1, with the noted traffic signal improvements.

No additional infrastructure improvements are recommended within the study area.

5.2 Total (2033) Intersection Operation

The results of the LOS analysis under total (2033) traffic volumes during the AM and PM peak hours can be found below in **Table 14**. Existing intersection geometry and traffic control have been utilized for this scenario, in addition to the signalization and turn lane improvements noted in Section 5.2. Stop

control has been assumed for the East Access egress movement. Detailed output of the Synchro analysis can be found in **Appendix G**.

Table 14 - Total (2033) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.62	21.9	C	-	-	0.92	27.4	C	-	-
EBL	0.70	29.4	C	70	42	0.87	50.0	D	70	53
EBTR	0.72	28.6	C	-	-	0.63	24.3	C	-	-
WBL	0.63	35.7	D	120	29	0.60	32.2	C	120	31
WBT	0.52	29.7	C	-	-	0.70	33.6	C	-	-
WBR	0.10	26.2	C	110	11	0.35	26.6	C	110	20
NBL	0.40	13.8	B	200	22	0.69	24.6	C	200	44
NBT	0.35	17.7	B	-	-	0.51	22.4	C	-	-
NBR	0.08	15.5	B	125	8	0.09	18.1	B	125	12
SBL	0.33	13.3	B	80	18	0.87	42.3	D	80	74
SBT	0.47	19.2	B	-	-	0.49	22.2	C	-	-
SBR	0.15	16.1	B	80	5	0.19	19.2	B	80	17
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	7.5	A	-	-	-	9.5		-	-
EB	0.04	1.3	A	-	-	0.03	1.1	A	-	-
WB	0.01	0.4	A	-	-	0.01	0.4	A	-	-
NB	0.28	22.3	C	-	-	0.45	29.6	D	-	-
SB	0.55	32.7	D	-	-	0.66	46.0	E	-	-
West Access & Sundowner Rd / County Rd 25 (signalized)	0.48	19.0	B	-	-	0.68	16.4	B	-	-
EBL	0.09	15.0	B	15	7	0.04	12.7	B	15	5
EBTR	0.84	30.7	C	-	-	0.64	20.6	C	-	-
WBL	0.44	12.6	B	30	11	0.55	8.5	A	30	27
WBR	0.38	11.5	B	-	-	0.39	7.7	A	-	-
NB	0.23	12.3	B	-	-	0.76	26.6	C	-	-
SB	0.04	10.6	B	-	-	0.08	15.1	B	-	-
East Access / County Rd 93 (unsignalized)	-	2.1	A	-	-	-	2.5	A	-	-
EB	0.46	43.3	E	-	17	0.54	48.3	E	-	21
NBTL	0.02	0.8	A	-	1	0.03	1.0	A	-	1
NB	0.27	0.0	-	-	-	0.38	0.0	-	-	-
SB	0.56	0.0	-	-	-	0.51	0.0	-	-	-

The results of the LOS analysis indicate that the intersection movements are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the turning movements at the signalized intersections can be accommodated by the existing auxiliary lane storage lengths.

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the MTO DS. According to the above-noted criteria, an eastbound left turn lane is marginally warranted at the County Road 25 / Wilson Road & Marshall Road intersection (results provided in **Appendix H**). The trigger for the left turn lane improvement occurs as a result of

the traffic growth on the County Road 25 corridor, as the advancing and opposing volumes at the intersection begin to exceed the nomograph threshold. In this case, it is recommended that the Town and County continue to monitor the traffic growth at the intersection to confirm the need and timing for the left turn lane improvement. For the purpose of this study, the current configuration has been carried through the future year analyses.

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the remaining unsignalized intersections (results are provided in **Appendix I**).

No infrastructure improvements are recommended within the study area.

5.3 Total (2038) Intersection Operation

The results of the LOS analysis under total (2038) traffic volumes during the AM and PM peak hours can be found below in **Table 15**. Existing intersection geometry and traffic control have been utilized for this scenario, in addition to the signalization and turn lane improvements noted in Section 5.2. The minor signal timing improvements noted in Section 3.5 have also been applied. Stop control has been assumed for the East Access egress movement. Detailed output of the Synchro analysis can be found in **Appendix G**.

Table 15 - Total (2038) LOS

Location (N-S Street / E-W Street)	Weekday AM Peak Hour					Weekday PM Peak Hour				
	V/C	Delay (s)	LOS	95% Queue (m)		V/C	Delay (s)	LOS	95% Queue (m)	
				Storage	Model				Storage	Model
County Rd 93 / County Rd 25 & Yonge St (signalized)	0.66	23.0	C	-	-	0.94	33.3	C	-	-
EBL	0.73	31.4	C	70	45	0.93	62.2	E	70	67
EBTR	0.74	28.8	C	-	-	0.65	27.8	C	-	-
WBL	0.69	39.3	D	120	32	0.71	43.2	D	120	39
WBT	0.51	29.1	C	-	-	0.74	39.9	D	-	-
WBR	0.11	25.7	C	110	11	0.22	29.4	C	110	10
NBL	0.48	15.2	B	200	25	0.67	24.2	C	200	47
NBT	0.39	19.0	B	-	-	0.65	32.3	C	-	-
NBR	0.09	16.3	B	125	10	0.10	24.6	D	125	14
SBL	0.40	14.4	B	80	21	0.86	36.8	D	80	91
SBT	0.53	20.9	C	-	-	0.61	30.4	C	-	-
SBR	0.16	17.0	B	80	5	0.20	25.1	C	80	21
Wilson Rd & Marshall Rd / County Rd 25 (unsignalized)	-	9.3	A	-	-	-	13.5		-	-
EB	0.05	1.4	A	-	-	0.04	1.1	A	-	-
WB	0.01	0.5	A	-	-	0.01	0.4	A	-	-
NB	0.33	25.7	D	-	-	0.54	37.2	D	-	-
SB	0.66	43.1	E	-	-	0.81	71.5	F	-	-
West Access & Sundowner Rd / County Rd 25 (signalized)	0.51	21.7	C	-	-	0.70	17.0	B	-	-
EBL	0.09	14.9	B	15	7	0.05	12.8	B	15	5
EBTR	0.90	36.7	D	-	-	0.70	22.6	C	-	-
WBL	0.44	12.8	B	30	11	0.58	9.3	A	30	27
WBR	0.40	11.6	B	-	-	0.43	8.1	A	-	-
NB	0.23	12.6	B	-	-	0.76	26.6	C	-	-
SB	0.04	11.0	B	-	-	0.08	15.1	B	-	-
East Access / County Rd 93 (unsignalized)	-	2.5	A	-	-	-	3.1	B	-	-
EB	0.54	56.7	F	-	21	0.64	66.5	F	-	27
NBTL	0.02	0.9	A	-	1	0.04	1.1	A	-	1
NB	0.30	0.0	-	-	-	0.42	0.0	-	-	-
SB	0.61	0.0	-	-	-	0.56	0.0	-	-	-

The results of the LOS analysis indicate that the intersection movements County Road 93 / County Road 25 & Yonge Street at the are operating within the typical design limits noted in Section 3.1.

The anticipated 95th percentile queues for the southbound left turn movement will exceed the existing auxiliary lane storage lengths. However, the queue length only marginally exceeds the storage length during a single peak hour. Consequently, no additional improvements are recommended to address the intersection queueing.

The eastbound (egress) movement at the East Access / County Road 93 intersection will experience a failing level-of-service as traffic growth compounds on County Road 93 through the horizon years. However, the delay only marginally exceeds the LOF threshold during the PM peak hour and all remaining movement operate at acceptable levels, well below capacity. It is further noted that based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at the

intersection (results are provided in **Appendix I**). Consequently, no improvements are recommended to address the minor delay exceedance. It is recommended that the County continue to monitor traffic signal warrants at the intersection as traffic volume increase and prior to the widening of on County Road 93. Based on our review, should traffic signals be required at the access, the spacing between the East Access and the County Road 93 / County Road 25 & Yonge Street is sufficient to accommodate queuing through the Total (2038) horizon year. Further discussion is provided in Section 5.4.

Similarly, the northbound movement at the Wilson Road & Marshall Road / County Road 25 intersection will begin to experience a failing level-of-service as traffic growth compounds on County Road 25 through the horizon years. However, the delay only marginally exceeds the LOF threshold during the PM peak hour and all remaining movement operate at acceptable levels, well below capacity. It is further noted that based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at the intersection (results are provided in **Appendix I**). Consequently, no improvements are recommended to address the minor delay exceedance.

An analysis was completed for left turn movements at the unsignalized intersections, based on the criteria outlined in Appendix 9A of the MTO DS. According to the above-noted criteria, an eastbound left turn lane is marginally warranted at the County Road 25 / Wilson Road & Marshall Road intersection (results provided in **Appendix H**). The trigger for the left turn lane improvement occurs as a result of the traffic growth on the County Road 25 corridor, as the advancing and opposing volumes at the intersection begin to exceed the nomograph threshold. In this case, it is recommended that the Town and County continue to monitor the traffic growth at the intersection to confirm the need and timing for the left turn lane improvement. For the purpose of this study, the current configuration has been carried through the future year analyses.

Based on the Ontario Traffic Manual Book 12 *Signal Justification*, traffic signals are not warranted at any of the remaining unsignalized intersections (results are provided in **Appendix I**).

No infrastructure improvements are recommended within the study area.

5.4 Site Access & Intersection Spacing

5.4.1 West Access

The West Access will operate efficiently as the new south leg of the four-legged signalized intersection at County Road 25 / Sundowner Road. A single ingress and egress lane will provide the necessary capacity to service the proposed development.

The proposed spacing between the West Access, Sundowner Road (E) to the east and Wilson Road / Marshall Road to the west (approximately 675 and 1,250 metres, respectively) is in excess of the typical minimum intersection spacing for an arterial road according to TAC Guidelines (Section 9.4.2.1) – 200 metres). The spacing between the West Access and the County Road 93 / County Road 25 & Yonge Street intersection to the east (approximately 750 metres) is also in excess of the typical desired spacing between signalized intersections (400 metres) along an arterial road.

5.4.2 East Access

At the time of this study, the proposed plan of development is a conceptual design, without a designated location for the East Access location.

Based on our review the sight lines on County Road 93, the East Access is recommended to be constructed within the first 120 metres north of the existing 9050 County Road 93 property limits.

Currently, a guiderail extends 100 metres north of the 9050 County Road 93 property line. The 20-metre separation from the end of the guiderail to the 120-metre sightline threshold is considered an optimal location for the East Access.

At this location, County Road 93 provides a road platform that includes a portion of the southbound merging taper lane, one southbound through lane and two northbound through lanes, with an approximate road width of 12.3 metres. **Figure 18** illustrates the optimal East Access location.

In order to remove the risk of a southbound vehicle merging through access intersection, it is recommended that the southbound merging lane be shifted to terminate prior to the East Access location.

As noted in the preceding sections, an exclusive northbound left turn lane is not warranted at the East Access based on the percentage of left turn vehicles (< 5% of the advancing volumes). In this case, the northbound median lane will act as a defacto left turn lane for the East Access, while the second northbound curb lane will allow northbound through volumes to maneuver past a left turning vehicle, should any queuing occur. A typical northbound left turn lane at this location would require a minimum of 15 metres of storage. Based on our review, the existing pavement width of County Road 93 provides a storage length of at least 40 metres. Consequently, the existing road platform can safely accommodate the northbound left turn movement with remedial line painting improvements and without additional road widening.

Based on our review of TAC Table 9.18.1, there is ample separation for the southbound merging lane and northbound diverging lane on County Road 93, downstream of the County Road 93 / Yonge Street intersection. Consequently, the necessary lane shifting required to remove the southbound merging lane through the East Access, and to maximize the northbound lane widths approaching East Access, can be completed while maintaining appropriate separation from the closest intersection.

A subsequent functional design drawing will confirm the extent of the necessary line painting improvements.

It is recommended that the County monitor traffic volumes on County Road 93 as the planned road widening approaches, to consider the need for traffic signals in the future. Based on our review of the Total (2038) traffic volumes, there are no queueing concerns between the upstream intersection (County Road / Yonge Street), should the East Access require signalization in the future.

5.5 Sight Distance Review

A review of the available sight distance for the proposed East Access and West Access was completed as part of this analysis.

The sight distance to the east and west of the West Access (greater than 300 metres in both directions) is greater than the minimum stopping sight distance requirements as identified in the County's Entrance By-Law #5544 – Section 3.2.2 – 230 meters for a posted speed of 80km/h.

Based on our on-site review, the optimal location of the East Access (as discussed in Section 5.4.2) provides a minimum stopping sight distance of 180 metres to the north and south, exceeding the County's Entrance By-Law #5544 – Section 3.2.2 – 180 meters for a posted speed of 60km/h, including an approximate downgrade of 6% from the north. The sight distance will be confirmed upon confirmation of the East Access location.

Consequently, there are no issues with the sight distance for East Access and West Access.

5.6 Emergency Access

A secondary emergency access is required for Block A-B and D-F, based on the level of proposed development (> 100 residential units).

Consideration was given to locating the secondary access at the subject site's southeast limits, connecting to County Road 93. However, considering the grading constraints and environmental impact required to construct an access at this location, it is not considered a feasible option.

As illustrated on the Site Plan, a secondary emergency access can be accommodated through the existing Town owned lands, connecting to County Road 25 east of the proposed West Access location.

6 Summary

2798860 Ontario Limited retained **JD Engineering** to prepare this traffic impact study in support of the proposed mixed-use development, on a site municipally known as 659 Balm Beach Road, in the Town of Midland, County of Simcoe.

This chapter summarizes the conclusions and recommendations from the study.

1. The proposed development is estimated to generate 445 AM and 540 PM new peak hour vehicle trips in the study area.
2. Detailed traffic and pedestrian counts were conducted at the study intersections in November 2024.
3. An intersection operational analysis was completed at the study area intersections, using the existing (2025) and background (2028, 2033 and 2038) traffic volumes, without the proposed development traffic. This enabled a review of existing and future traffic deficiencies that would be present without the influence of the proposed development. The following improvements are recommended:

County Road 93 / County Road 25 & Yonge Street

Background (2038)

- Traffic signal optimization and increased cycle length (100s to 110s)
4. An estimate of the amount of traffic that would be generated by the Subject Site was prepared and assigned to the study area roads and intersections.
 5. An intersection operation analysis was completed under total (2028, 2033 and 2038) traffic volumes with the proposed development operational at the study area intersections. The following improvements are recommended:

West Access & Sundowner Road / County Road 25

First Phase of Construction

- Provision of traffic signals with semi-actuated control (cycle length of 60 seconds);
- The implementation of an exclusive westbound left turn lane with 30m storage and 60m taper length; and
- The implementation of an exclusive eastbound left turn lane with 15m storage and 60m taper length.

East Access / County Road 93

Prior to Occupancy

- Remedial line painting to remove the southbound merging lane through the intersection and maximize the northbound lanes approaching the intersection.
 - It is recommended that the County monitor traffic volumes on County Road 93 as the planned road widening approaches, to consider the need for traffic signals in the future.
6. The West Access will operate efficiently as the new south leg of the four-legged signalized intersection at County Road 25 / Sundowner Road. A single ingress and egress lane will provide the necessary capacity to service the proposed development.
 7. The East Access will operate efficiently as a full-movement driveway, with one-way stop control for the egress movements. A single ingress and egress lane will provide the necessary capacity to service the proposed development. The optimal location will be confirmed through the detailed design process.
 8. The location of the proposed site access intersections are considered appropriate with respect to minimum driveway spacing requirements.
 9. The sight distance available for the proposed site access intersections are suitable for the intended use.
 10. In summary the proposed development will not cause any operational issues and will not add significant delay or congestion to the local roadway network.

Figure 5: Adjacent Development Traffic Volumes – 710 Balm Beach Road (50%)

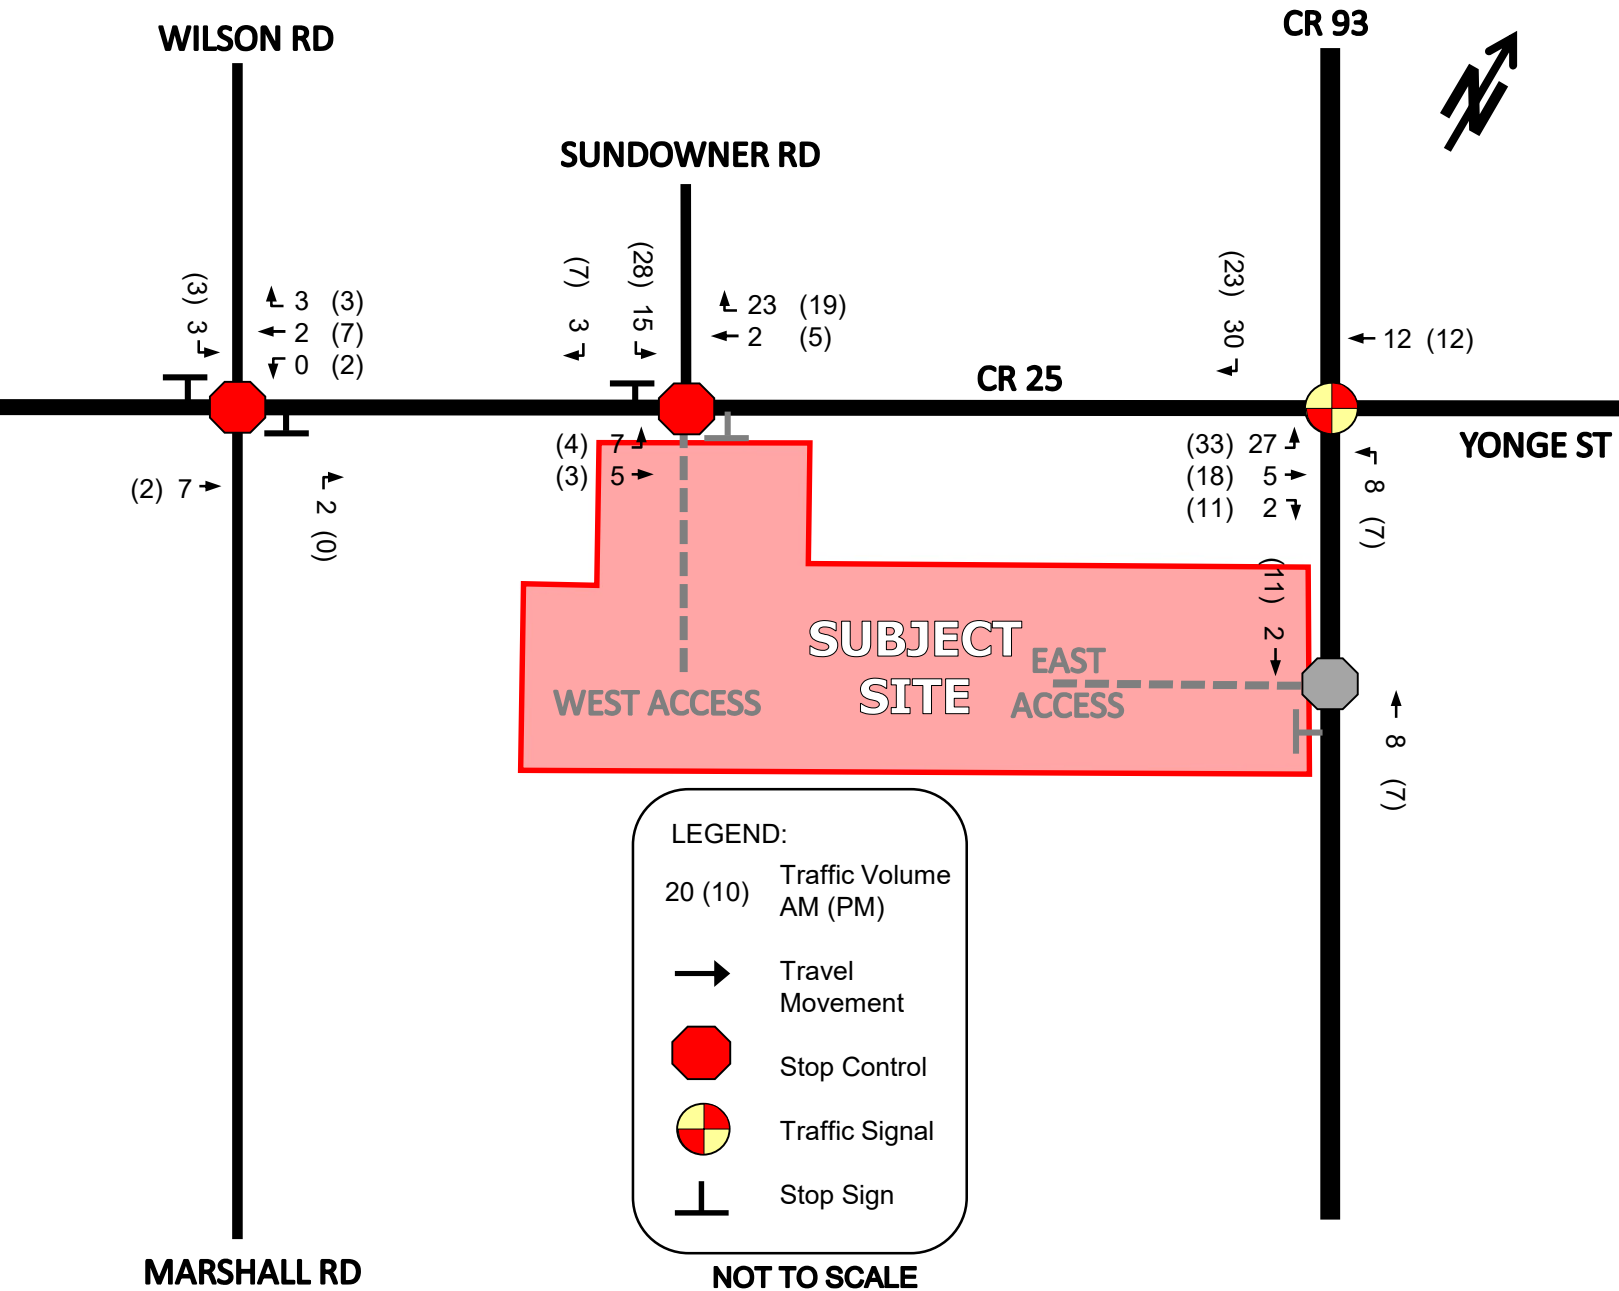


Figure 6: Existing (2025) Traffic Volumes

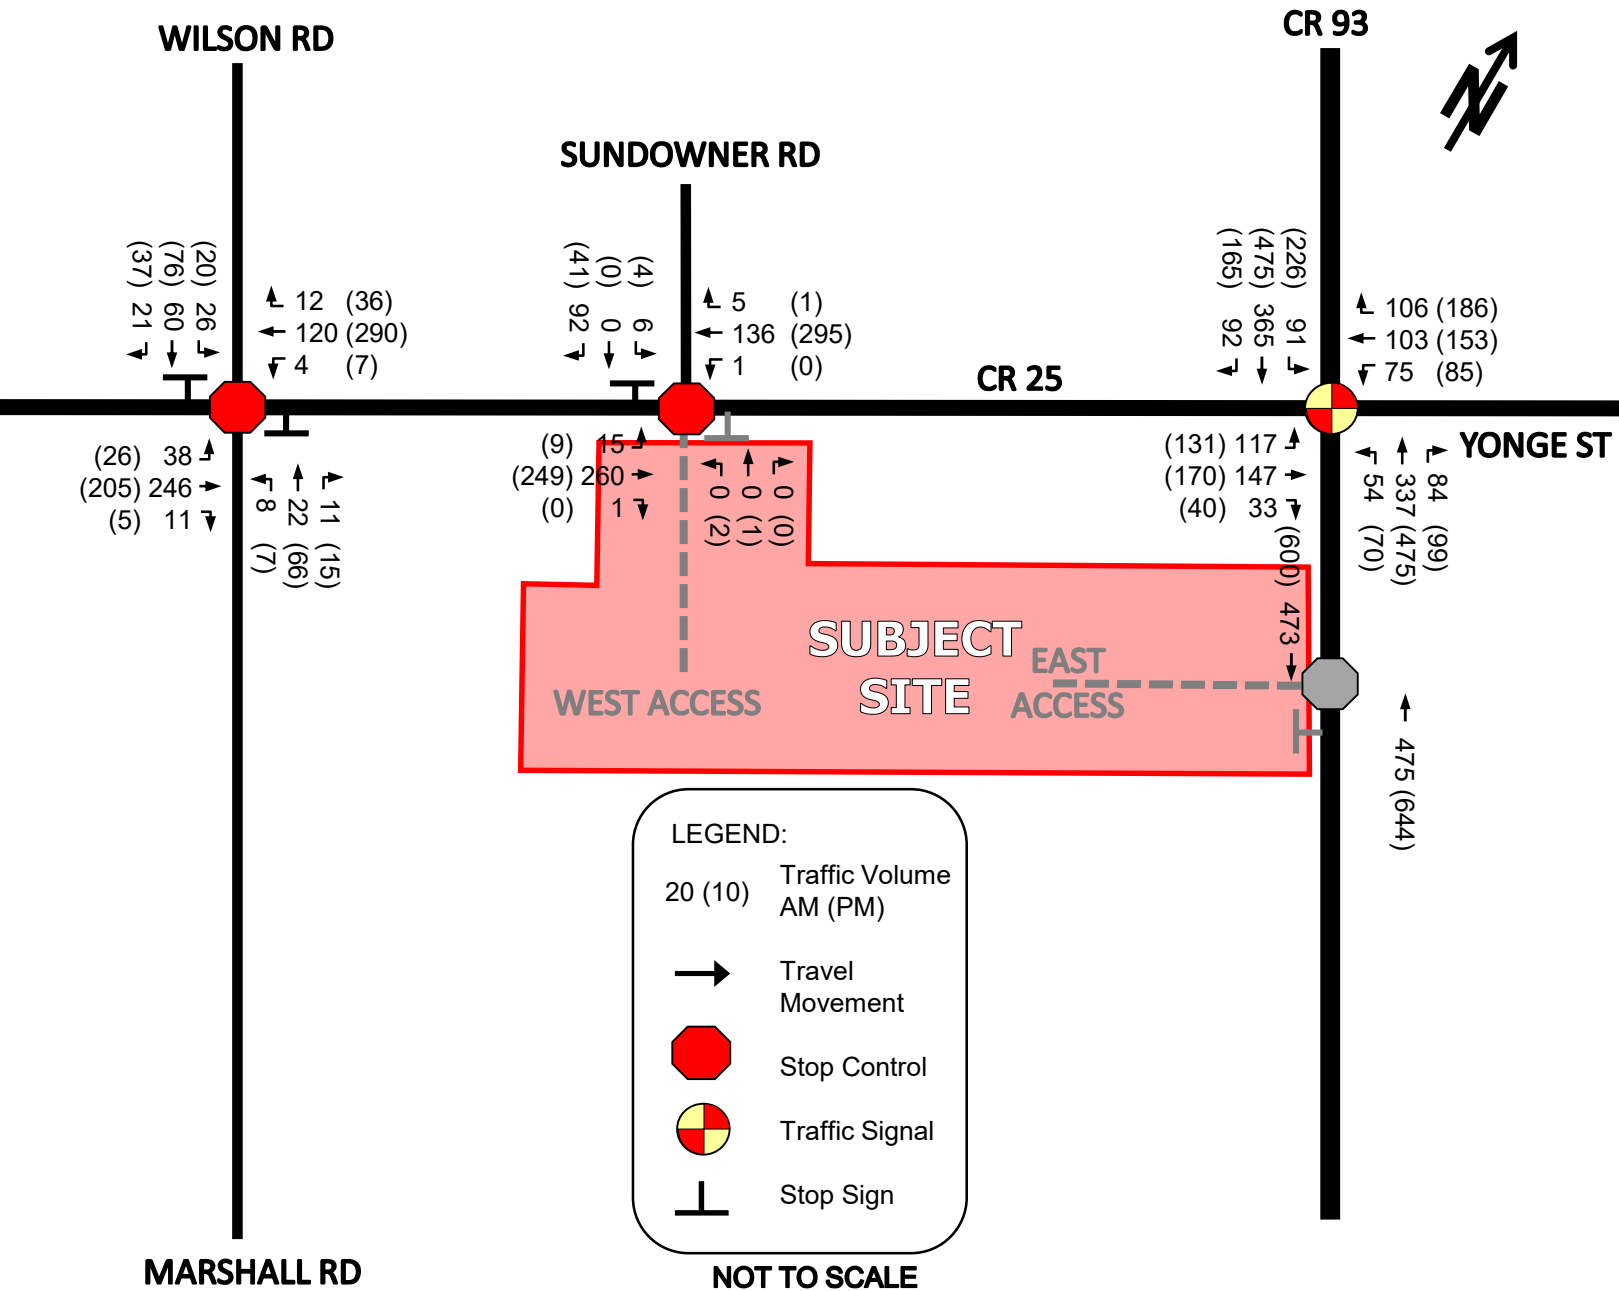


Figure 7 Background (2028) Traffic Volumes

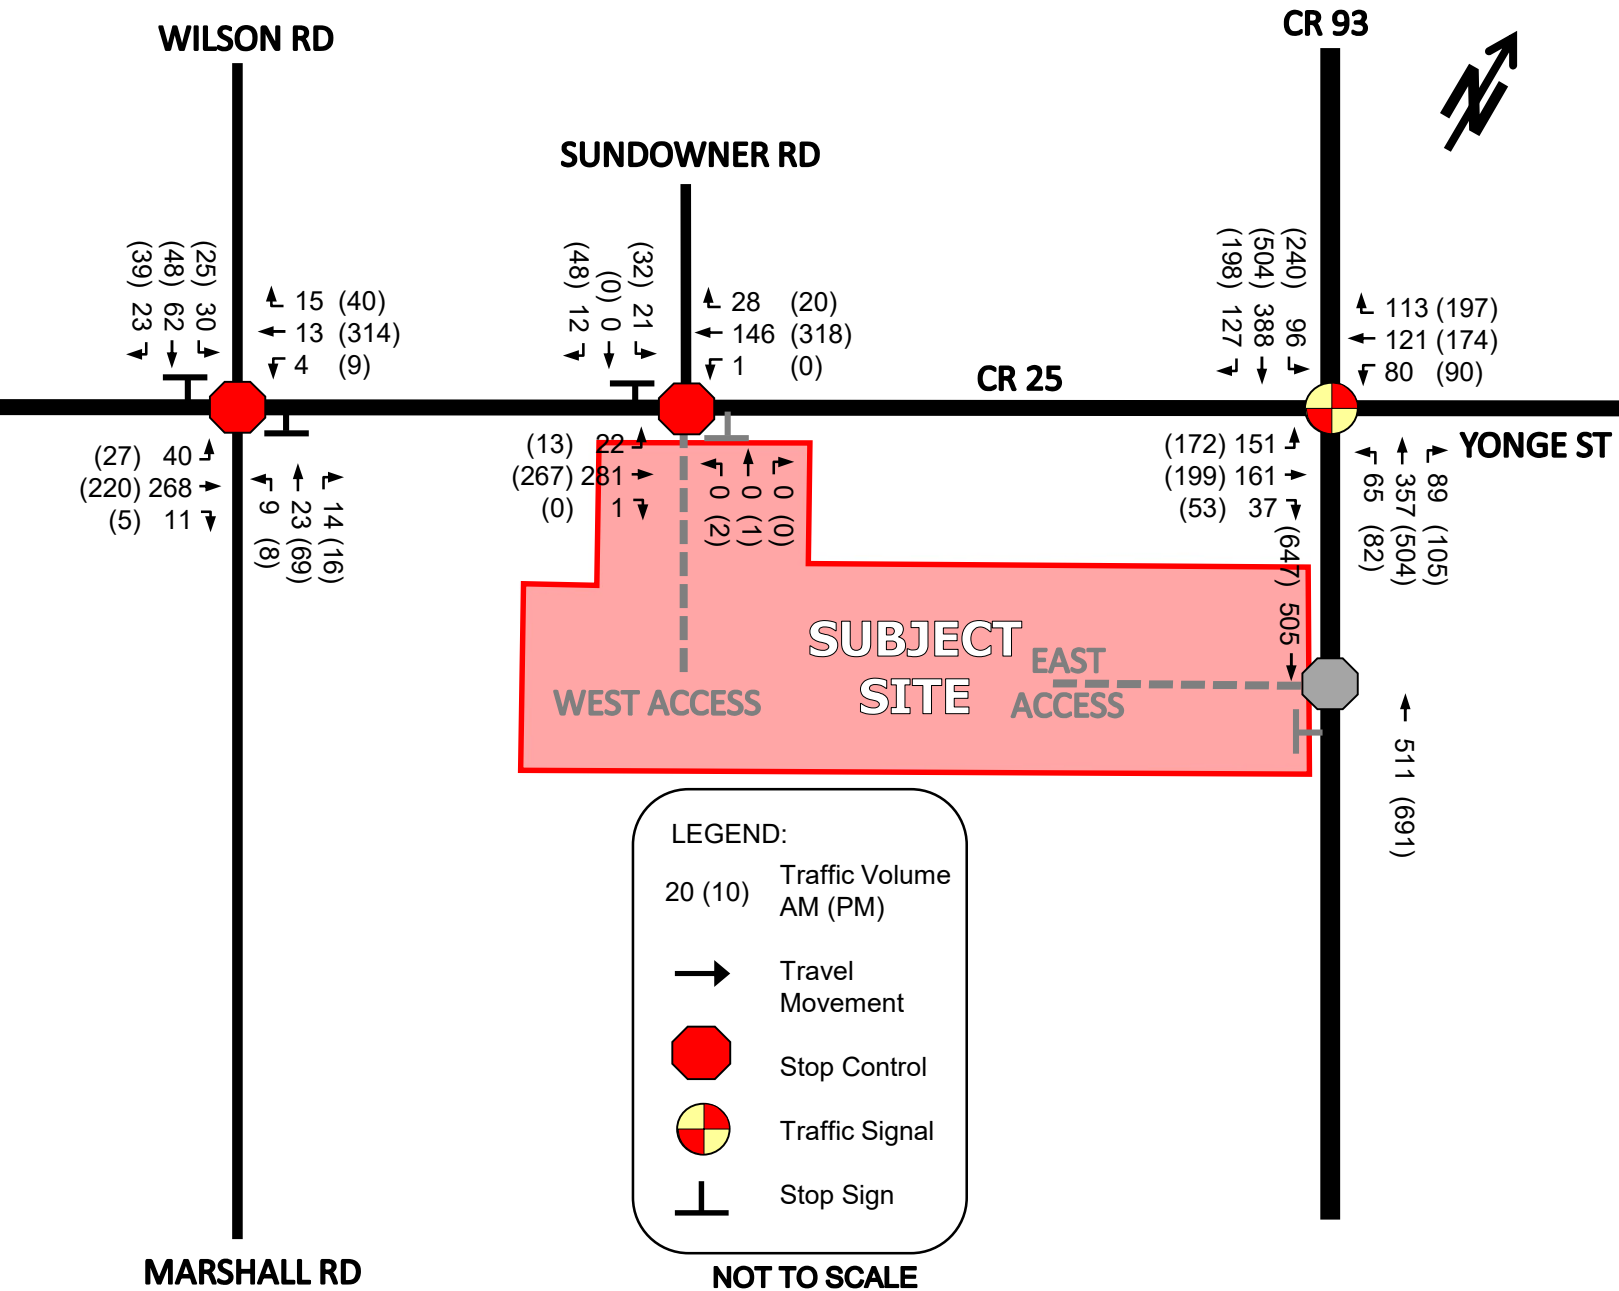


Figure 8 Background (2033) Traffic Volumes

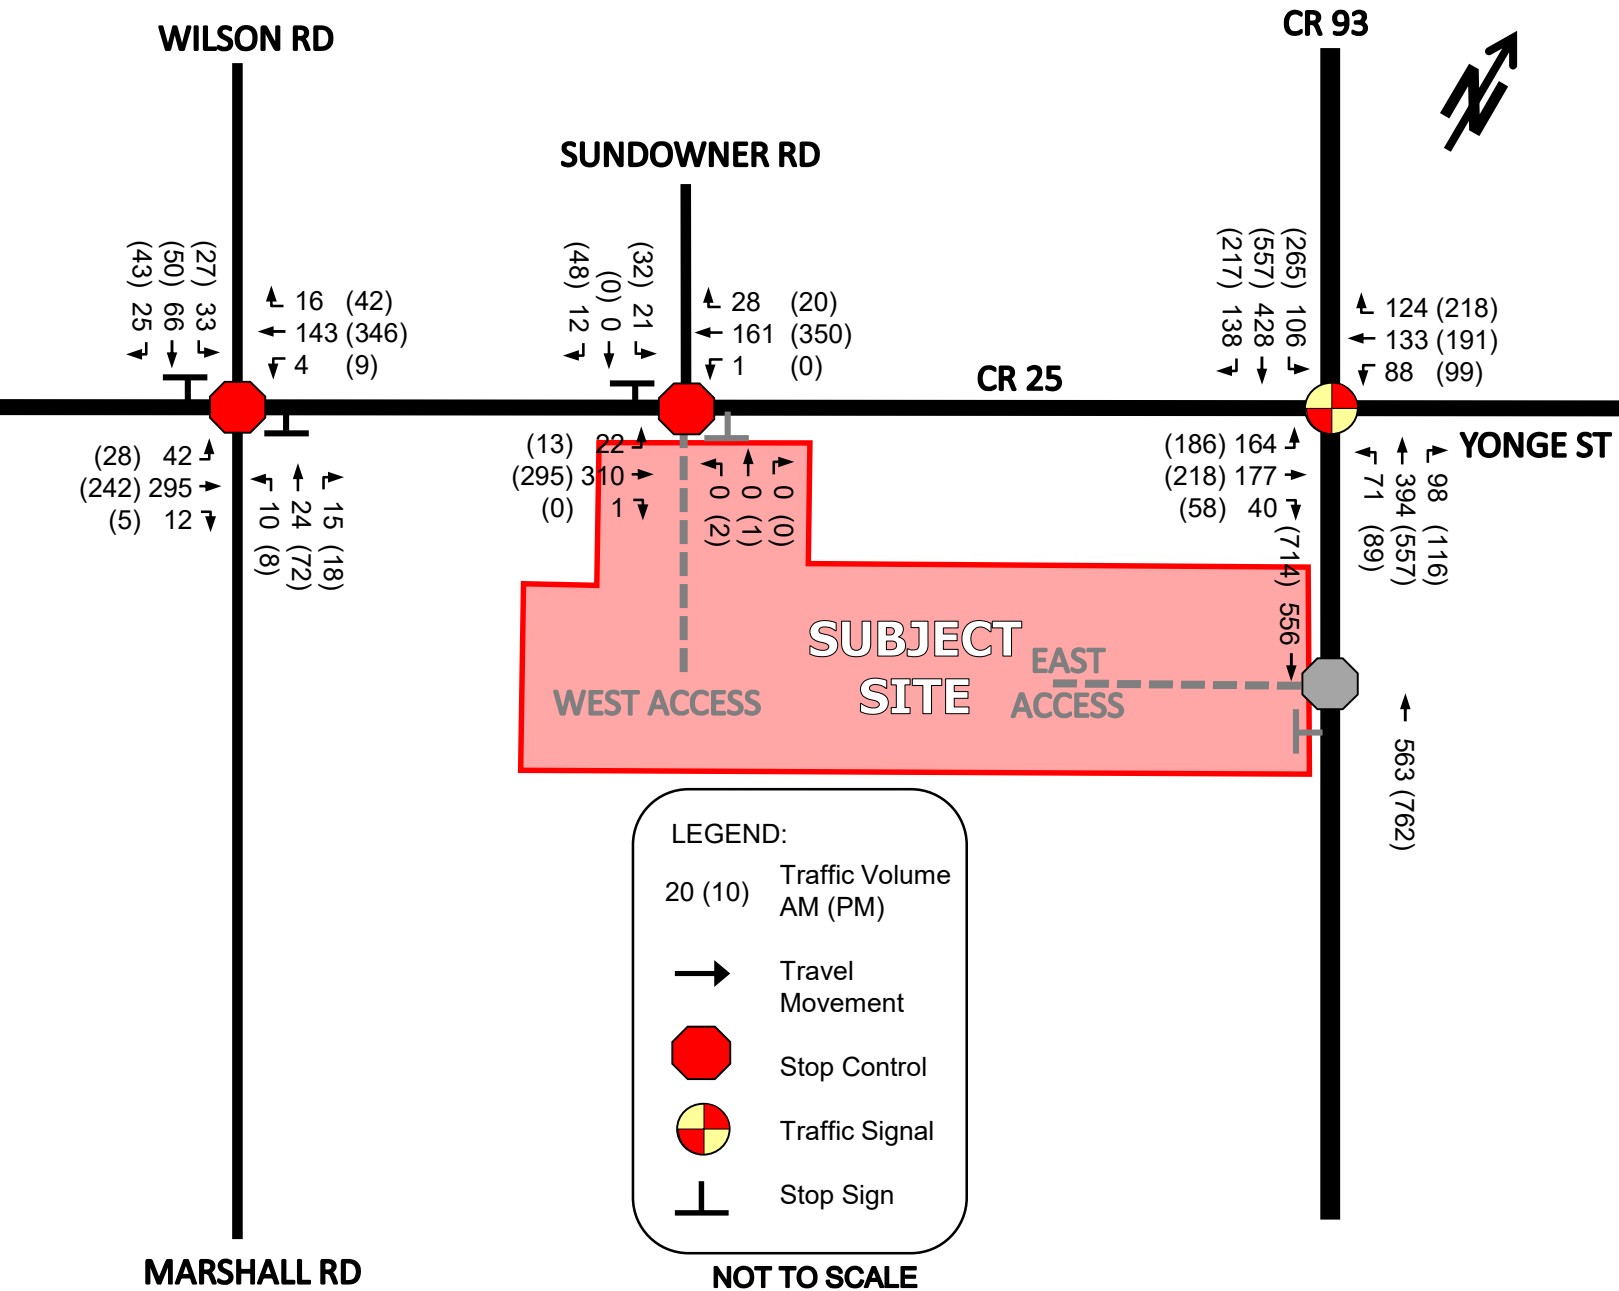


Figure 9: Background (2038) Traffic Volumes

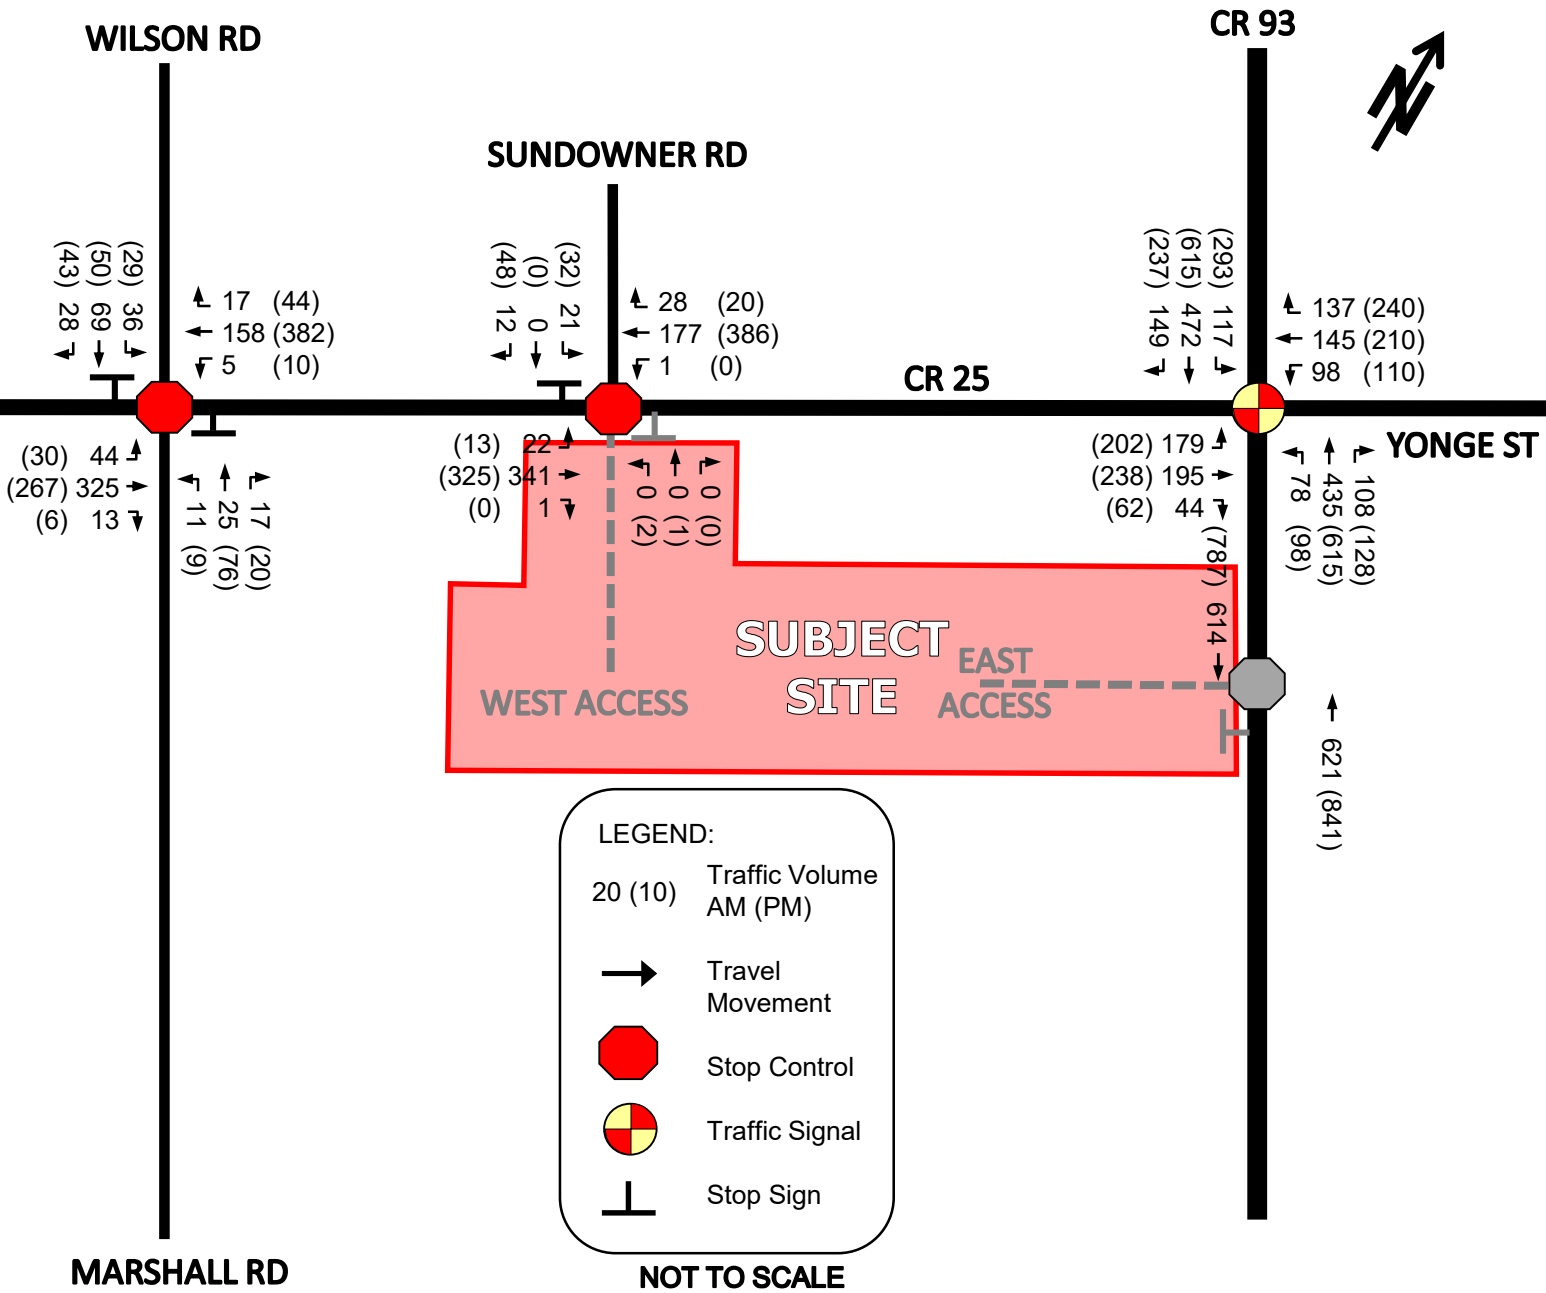


Figure 10: Site Traffic Assignment - Block A-B (Residential)

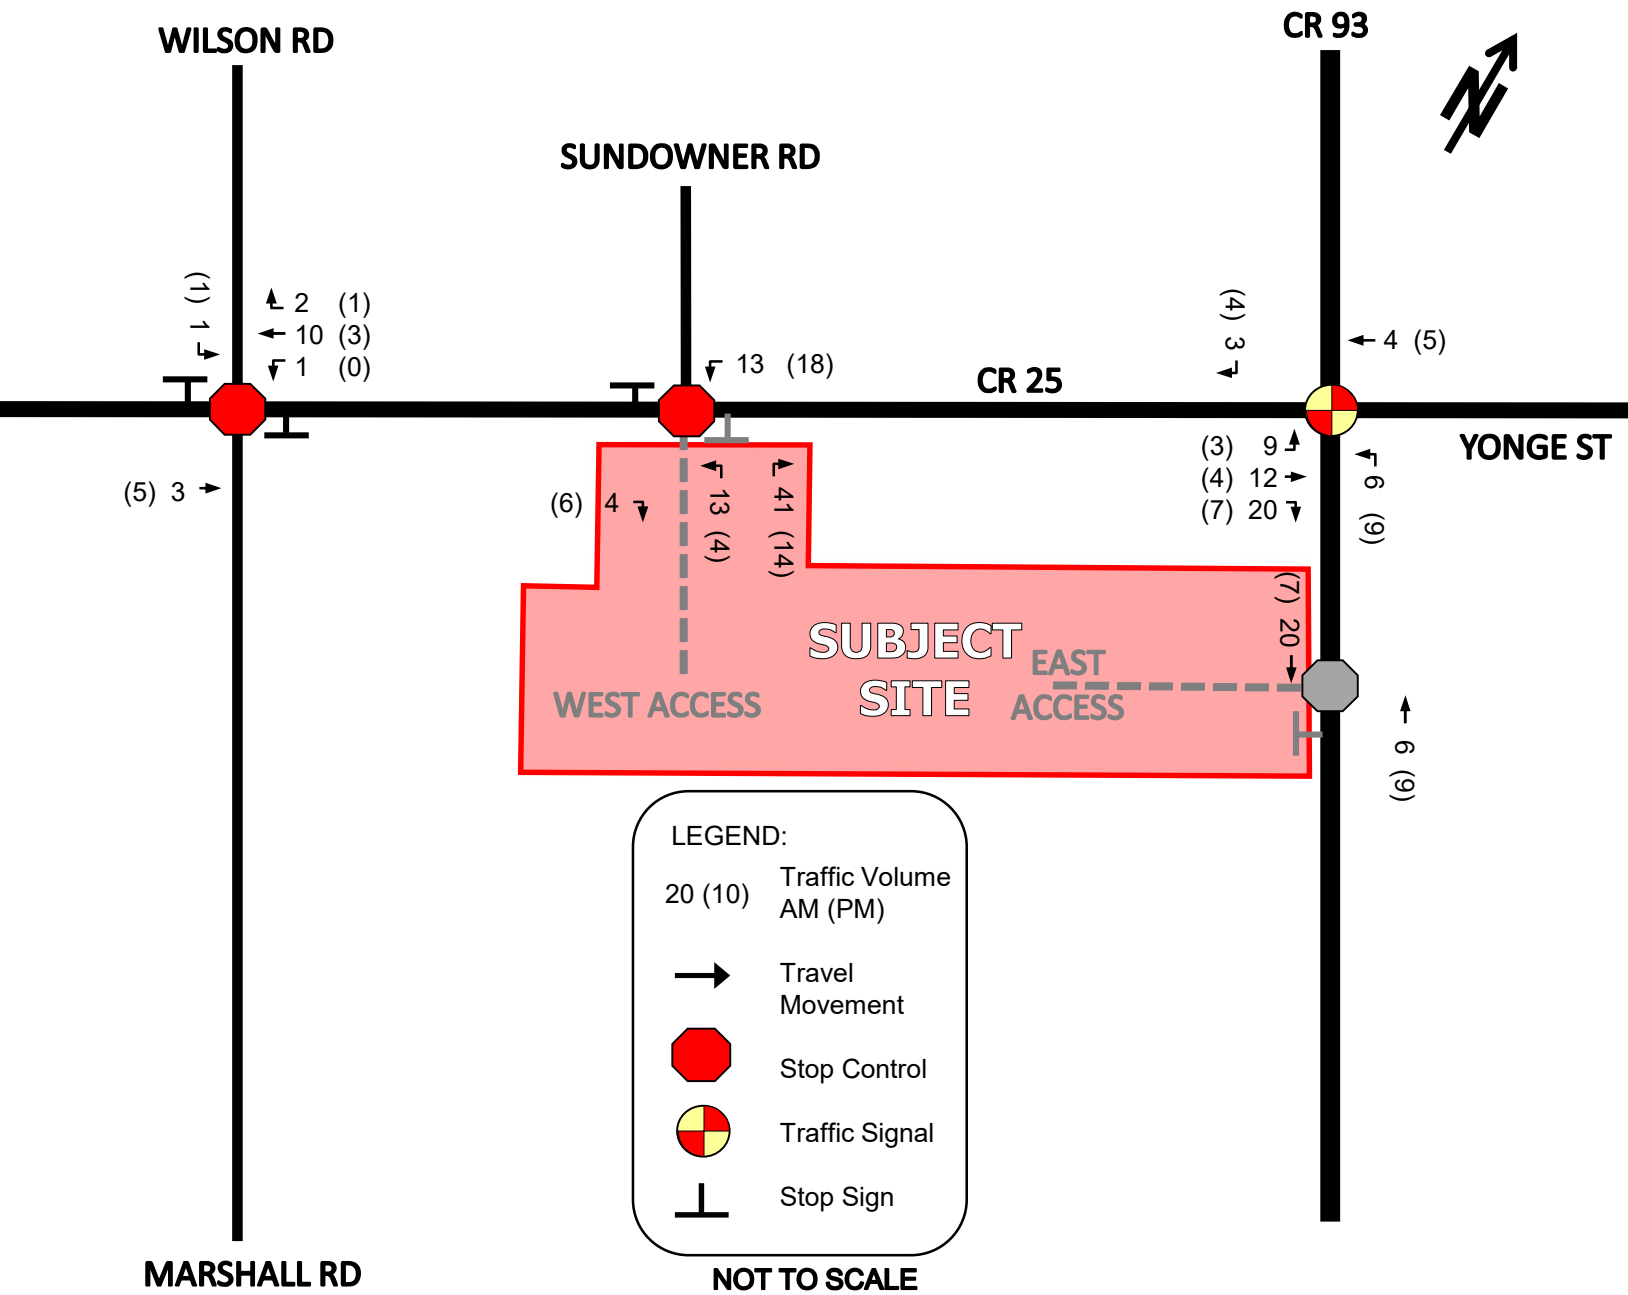


Figure 11: Site Traffic Assignment - Block A-B (Commercial – NET)

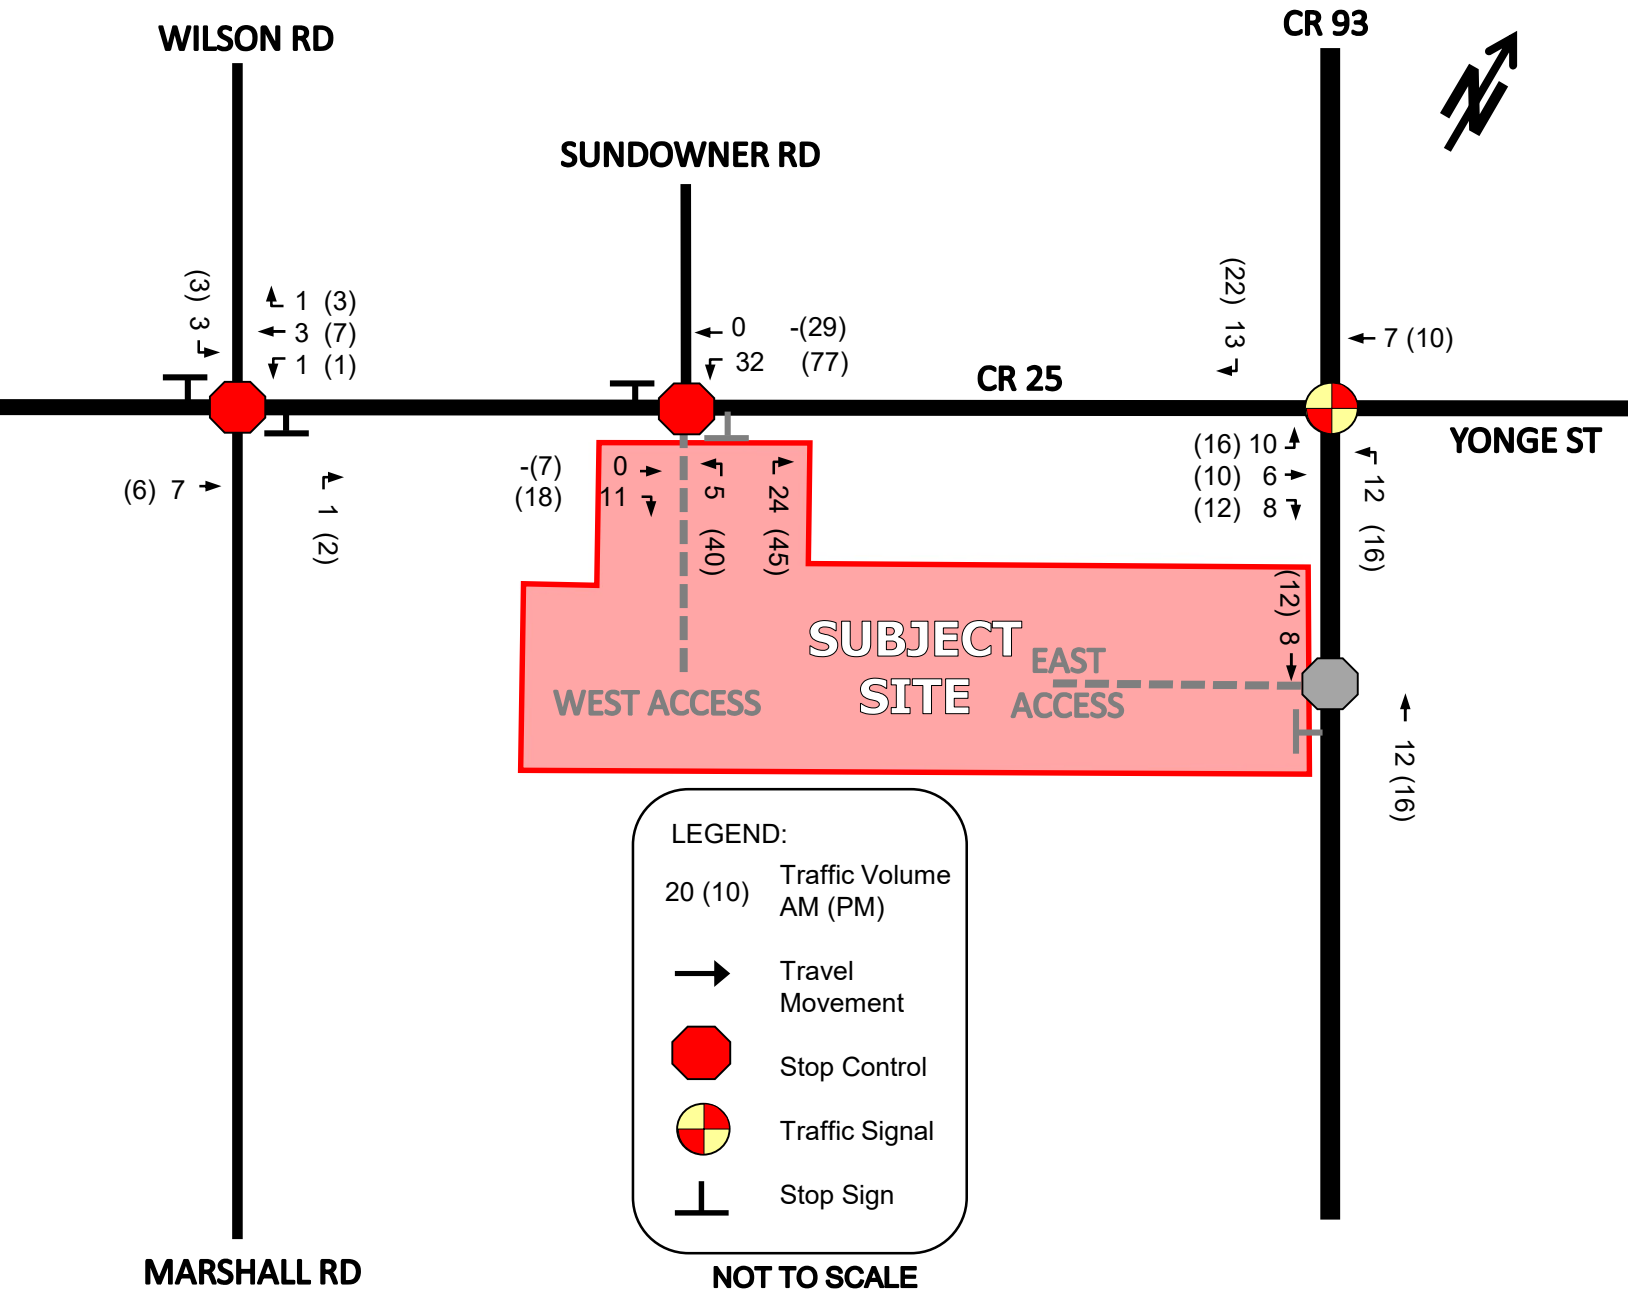


Figure 12 Site Traffic Assignment - Block C (Residential)

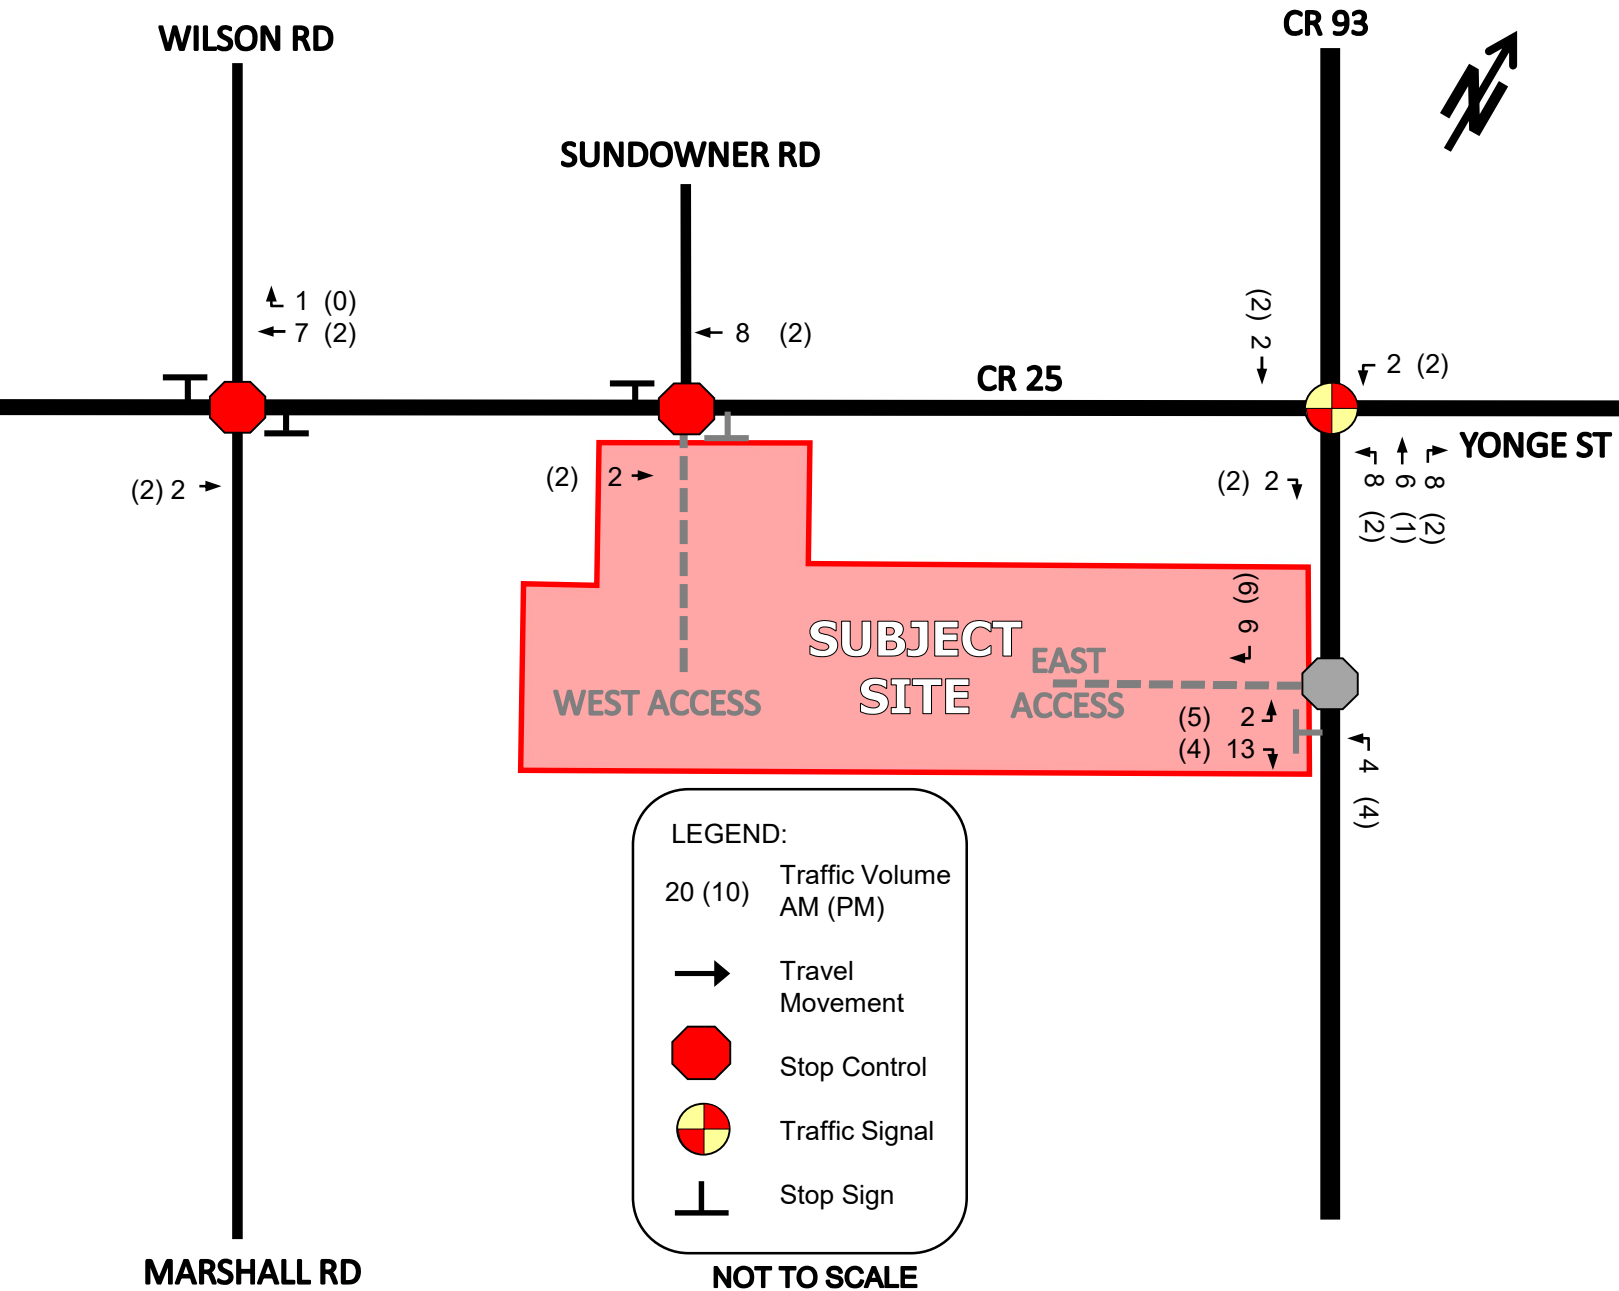


Figure 13 Site Traffic Assignment - Block C (Commercial - NET)

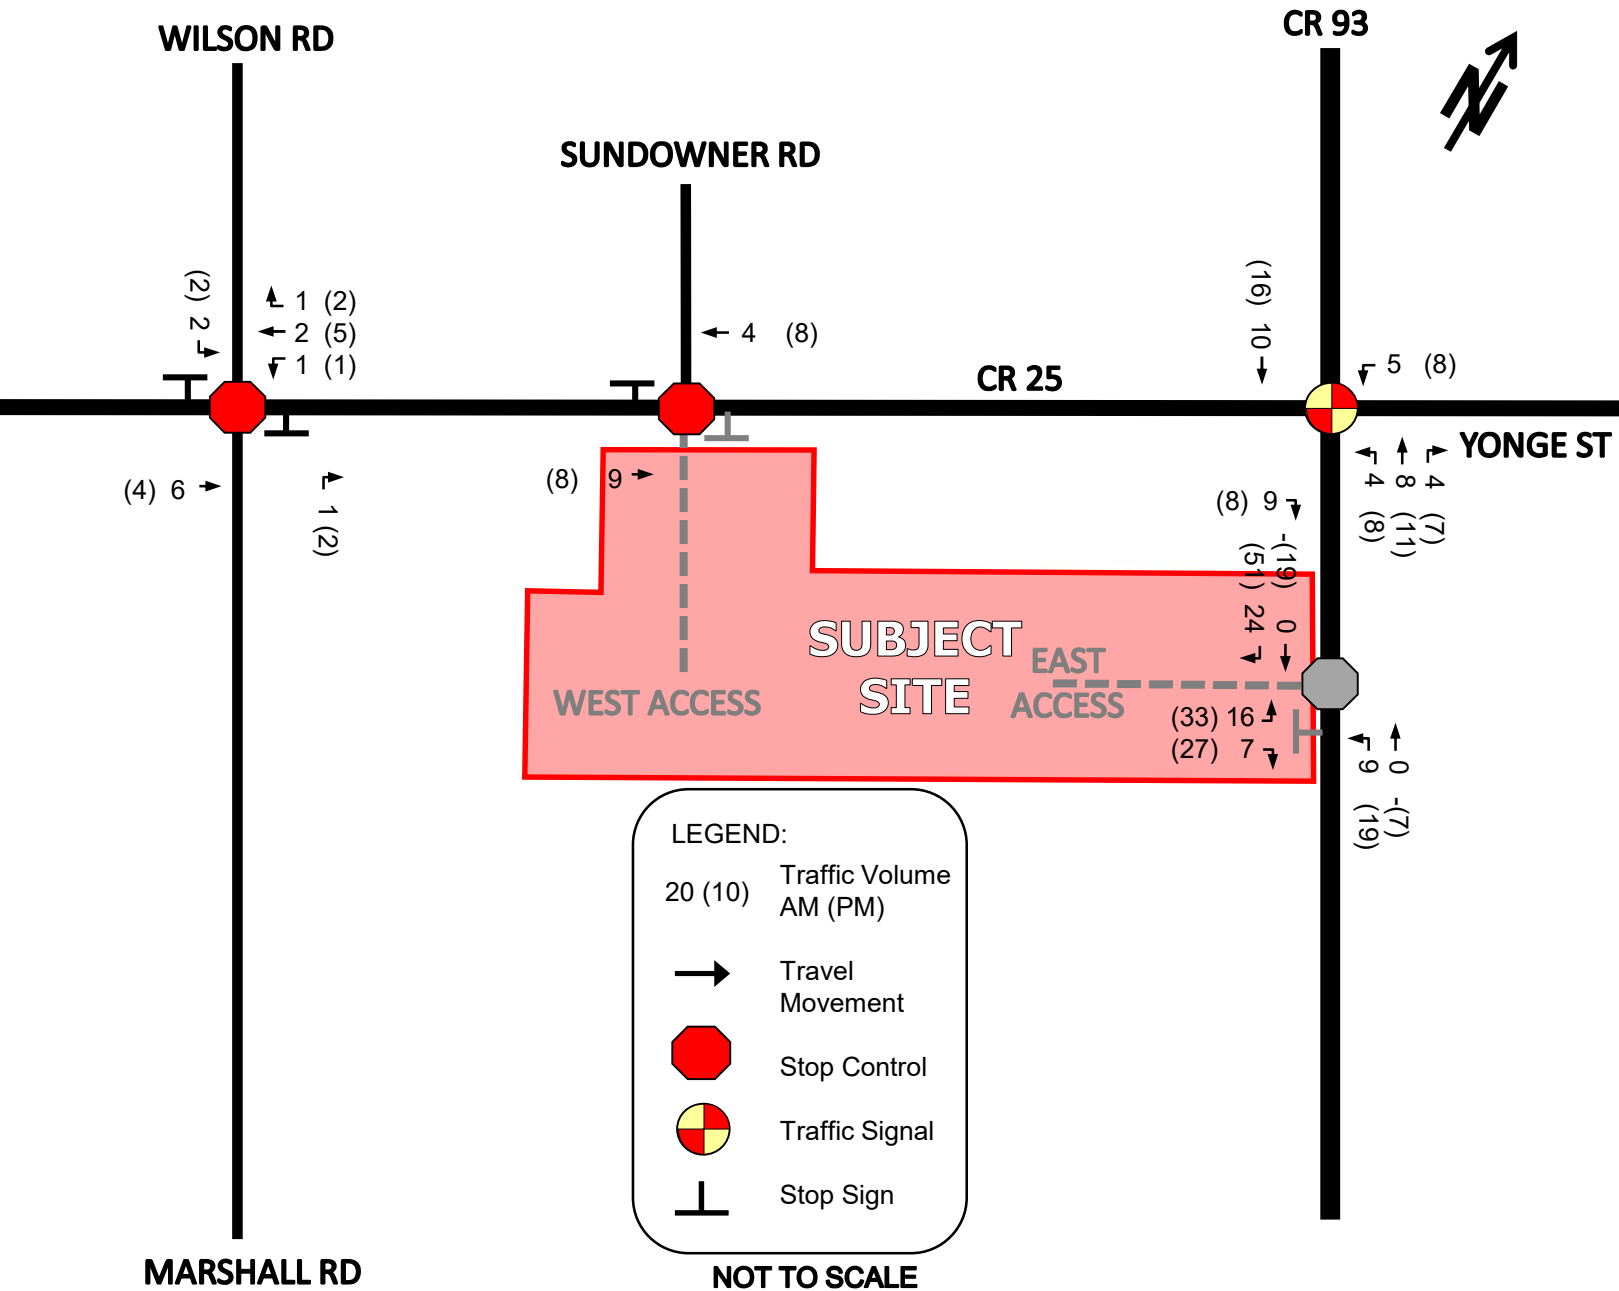


Figure 14 Site Traffic Assignment - Block D-F (Residential)

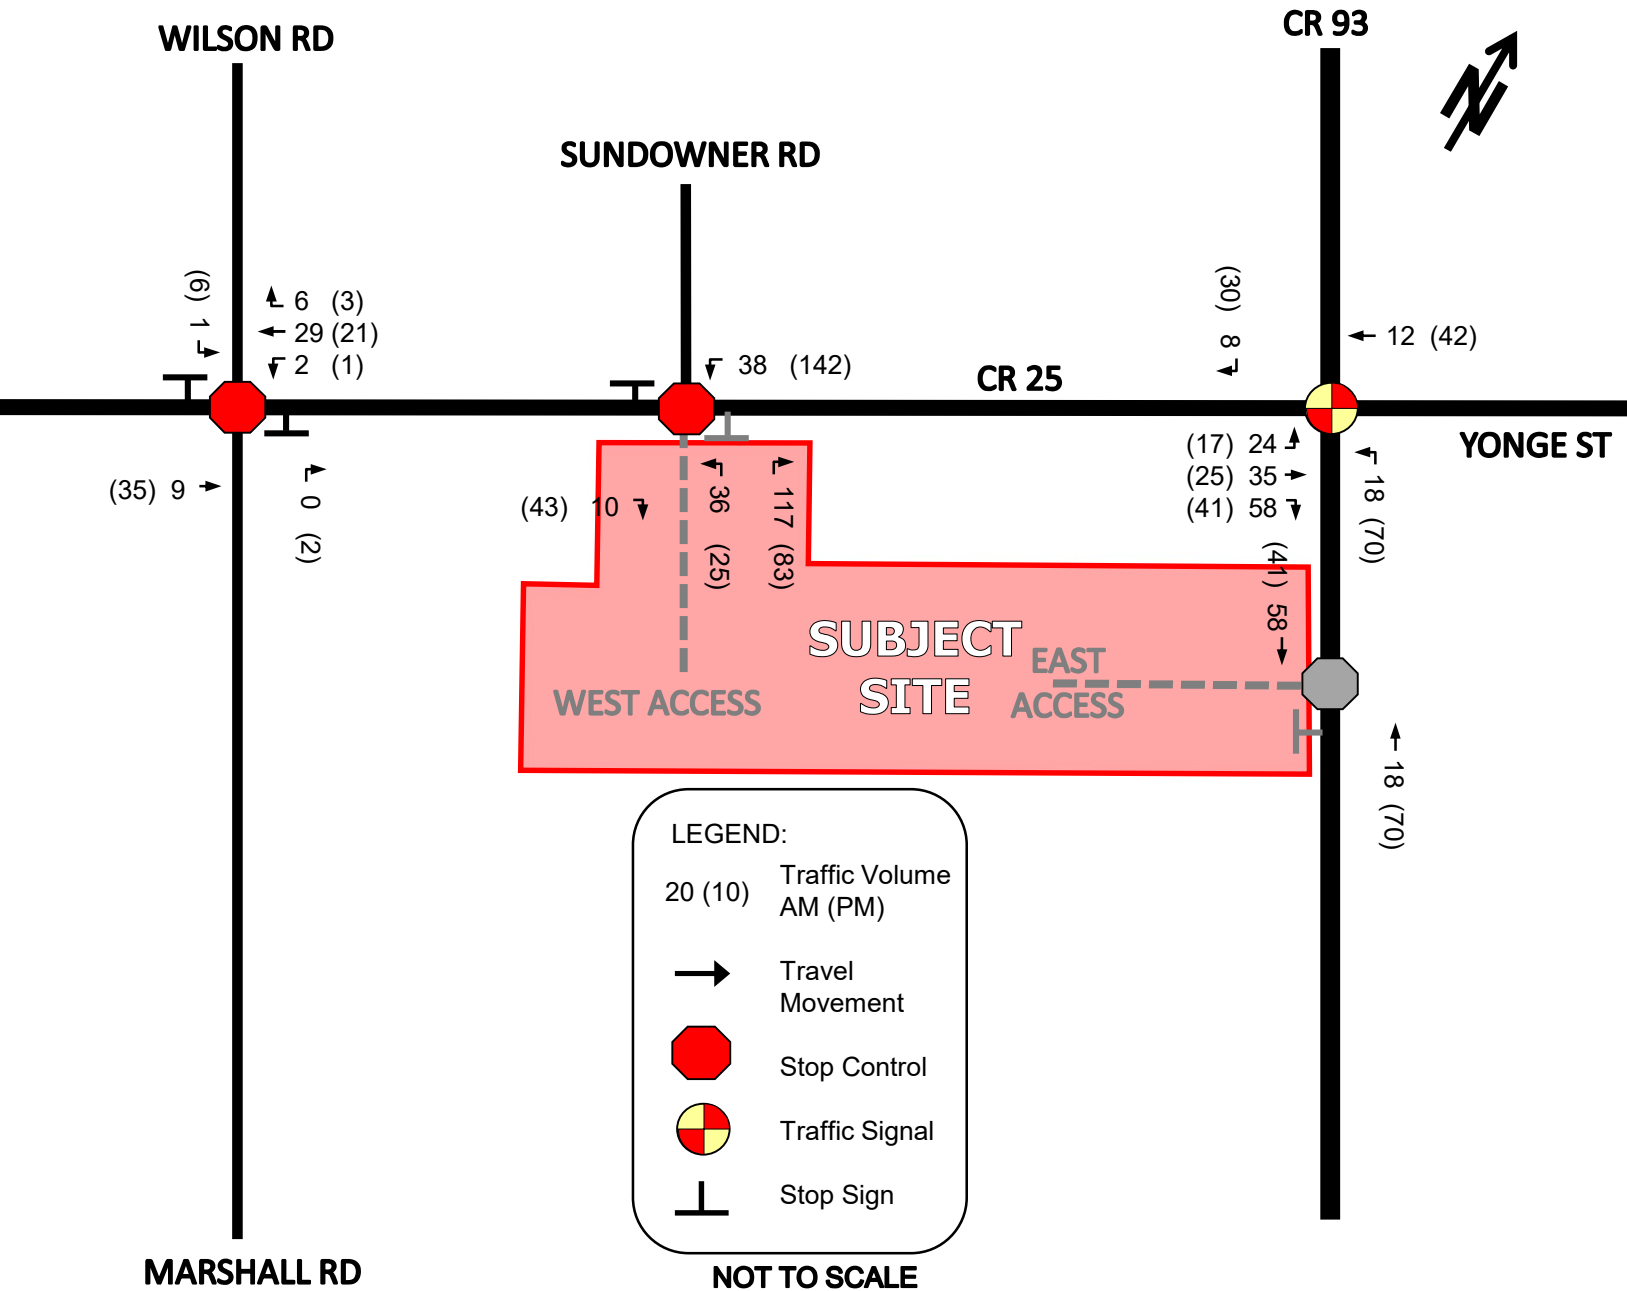


Figure 15: Site Traffic Assignment - TOTAL

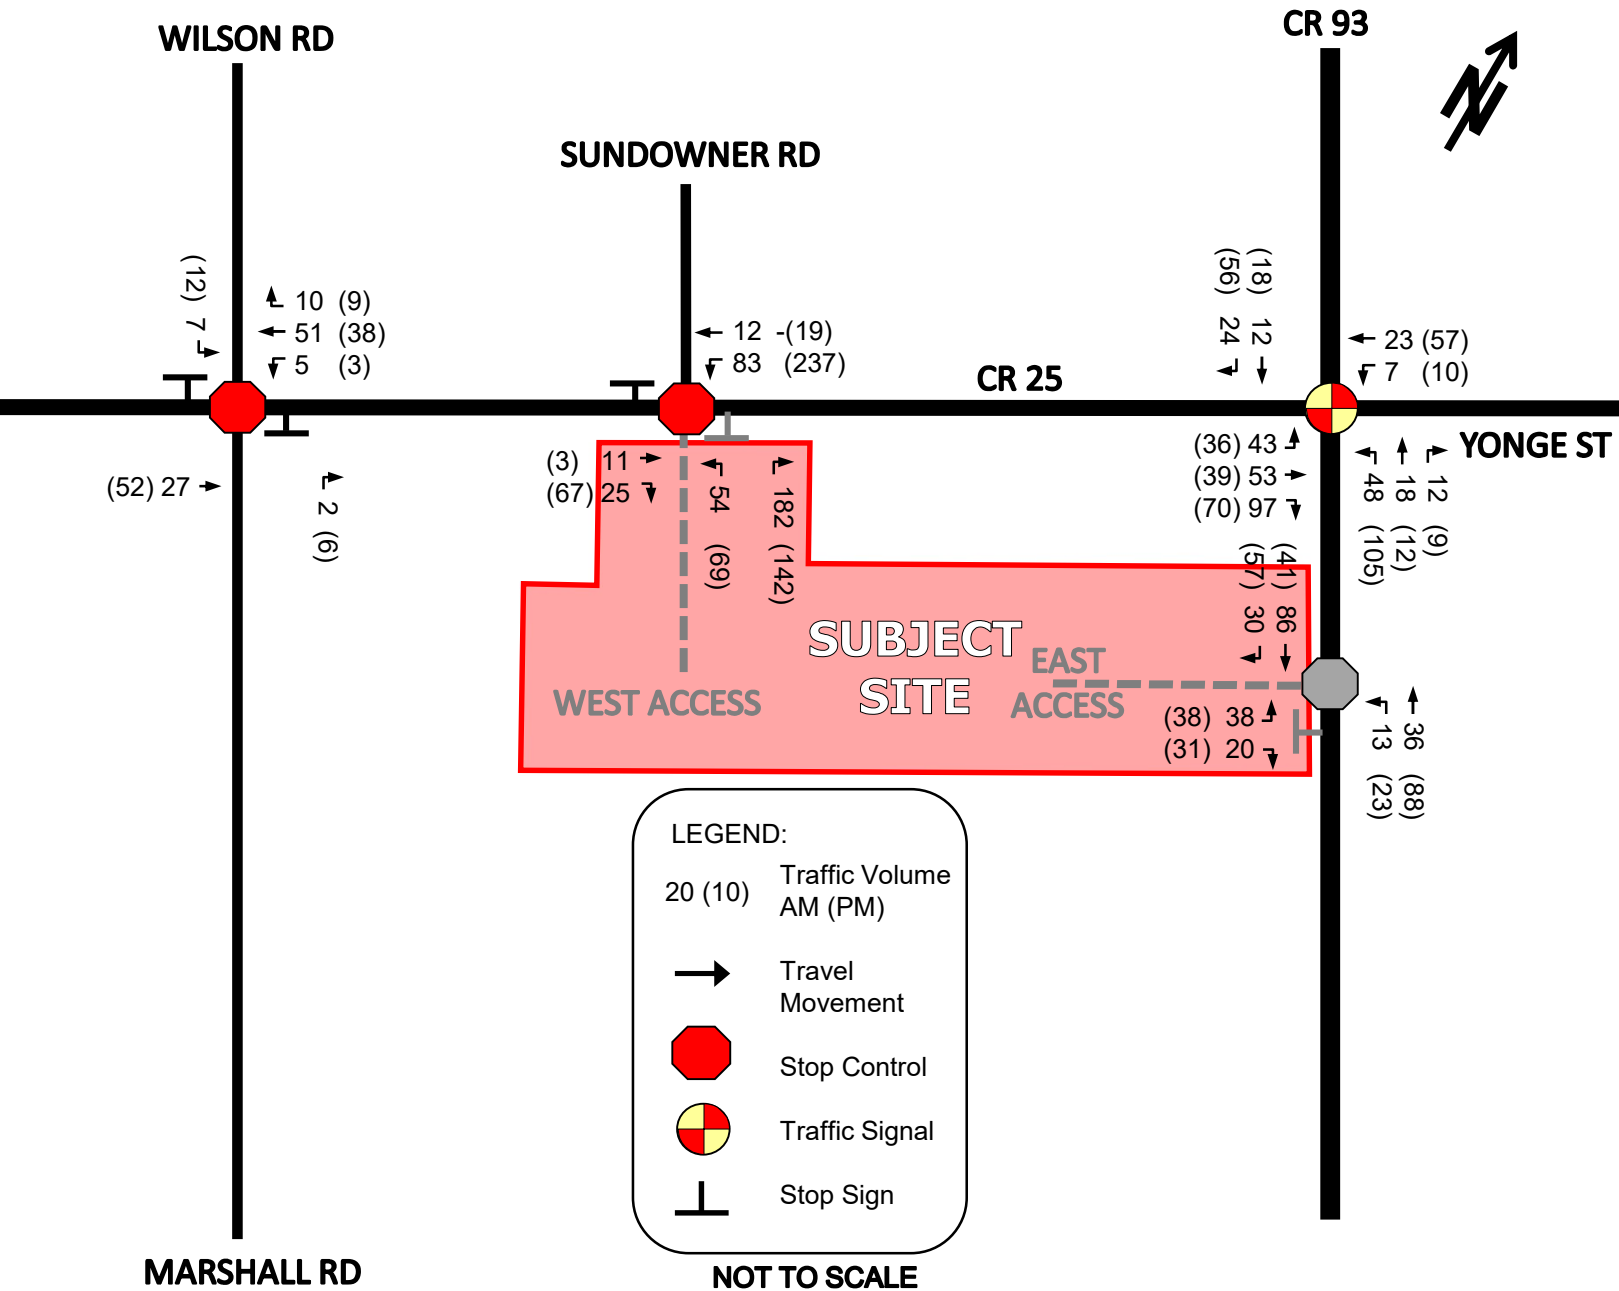


Figure 16: Total (2028) Traffic Volumes

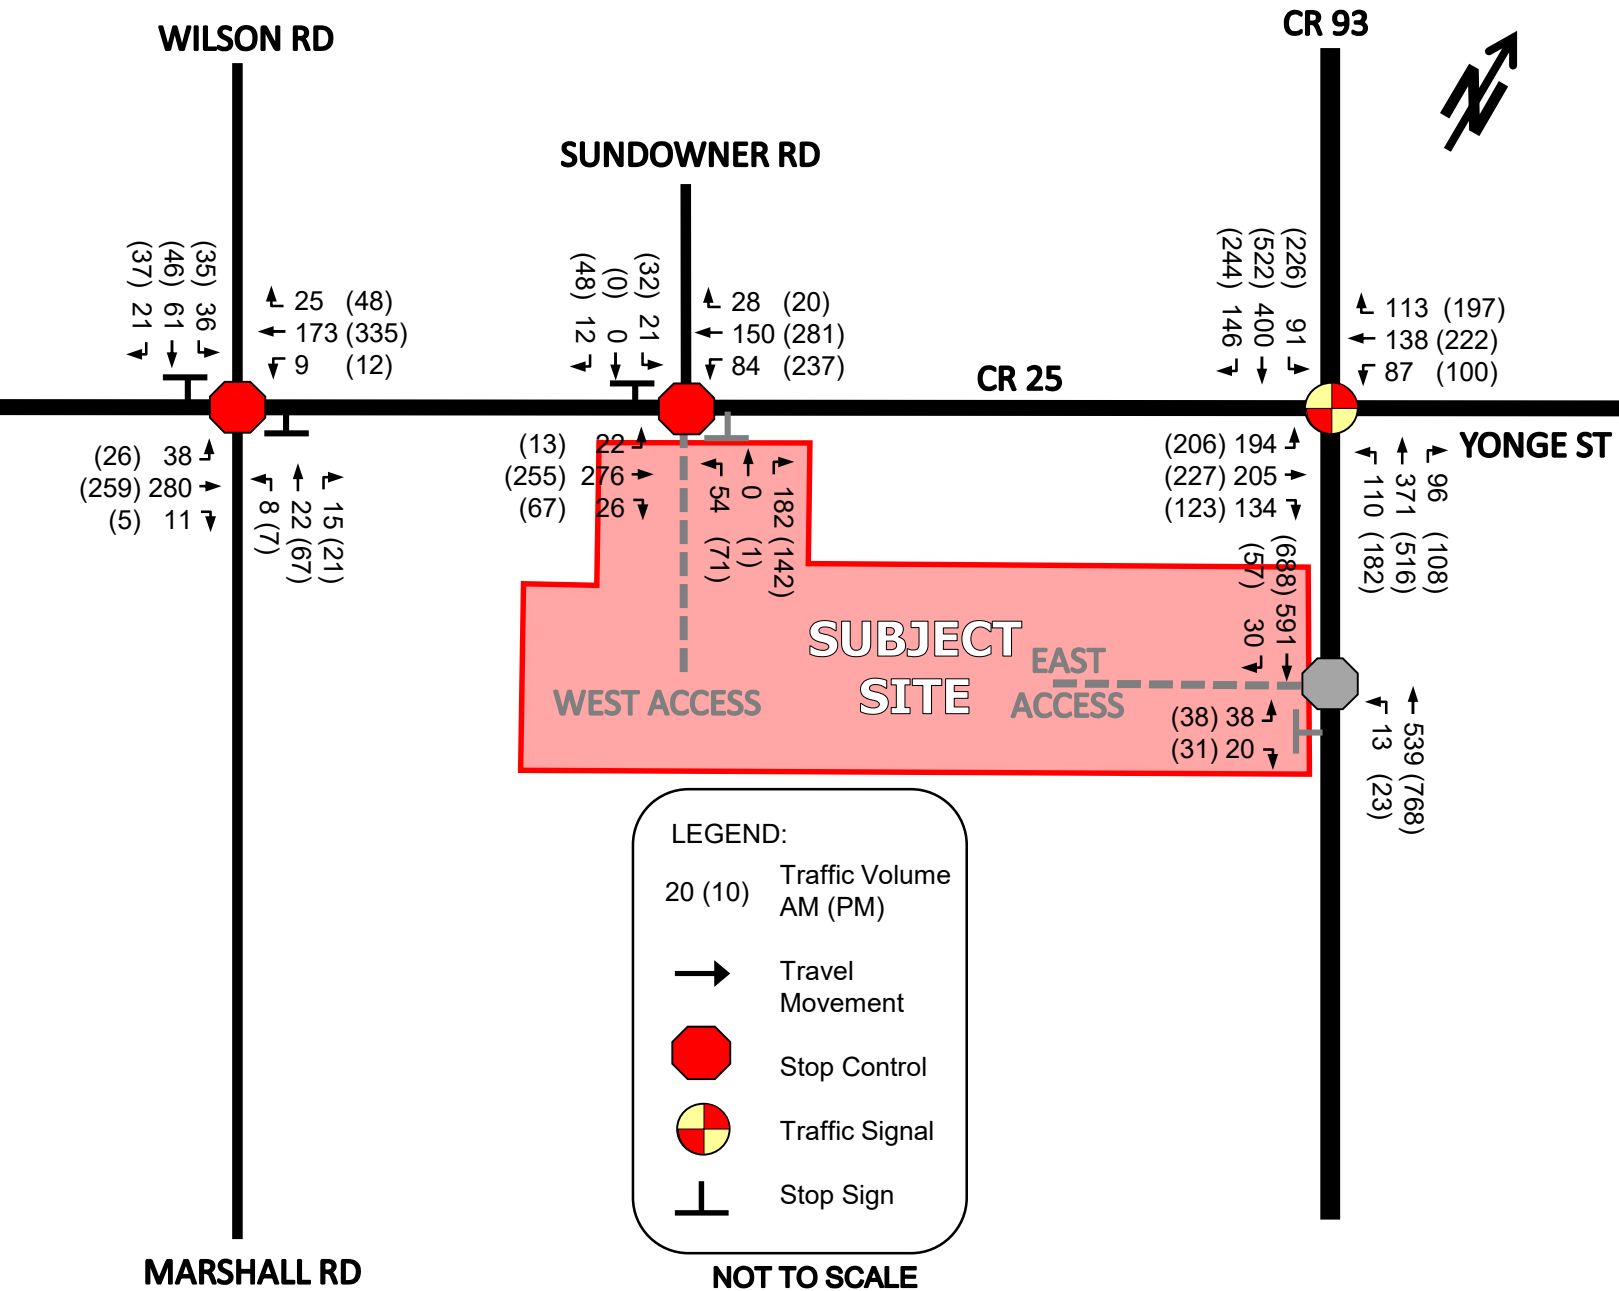


Figure 17: Total (2033) Traffic Volumes

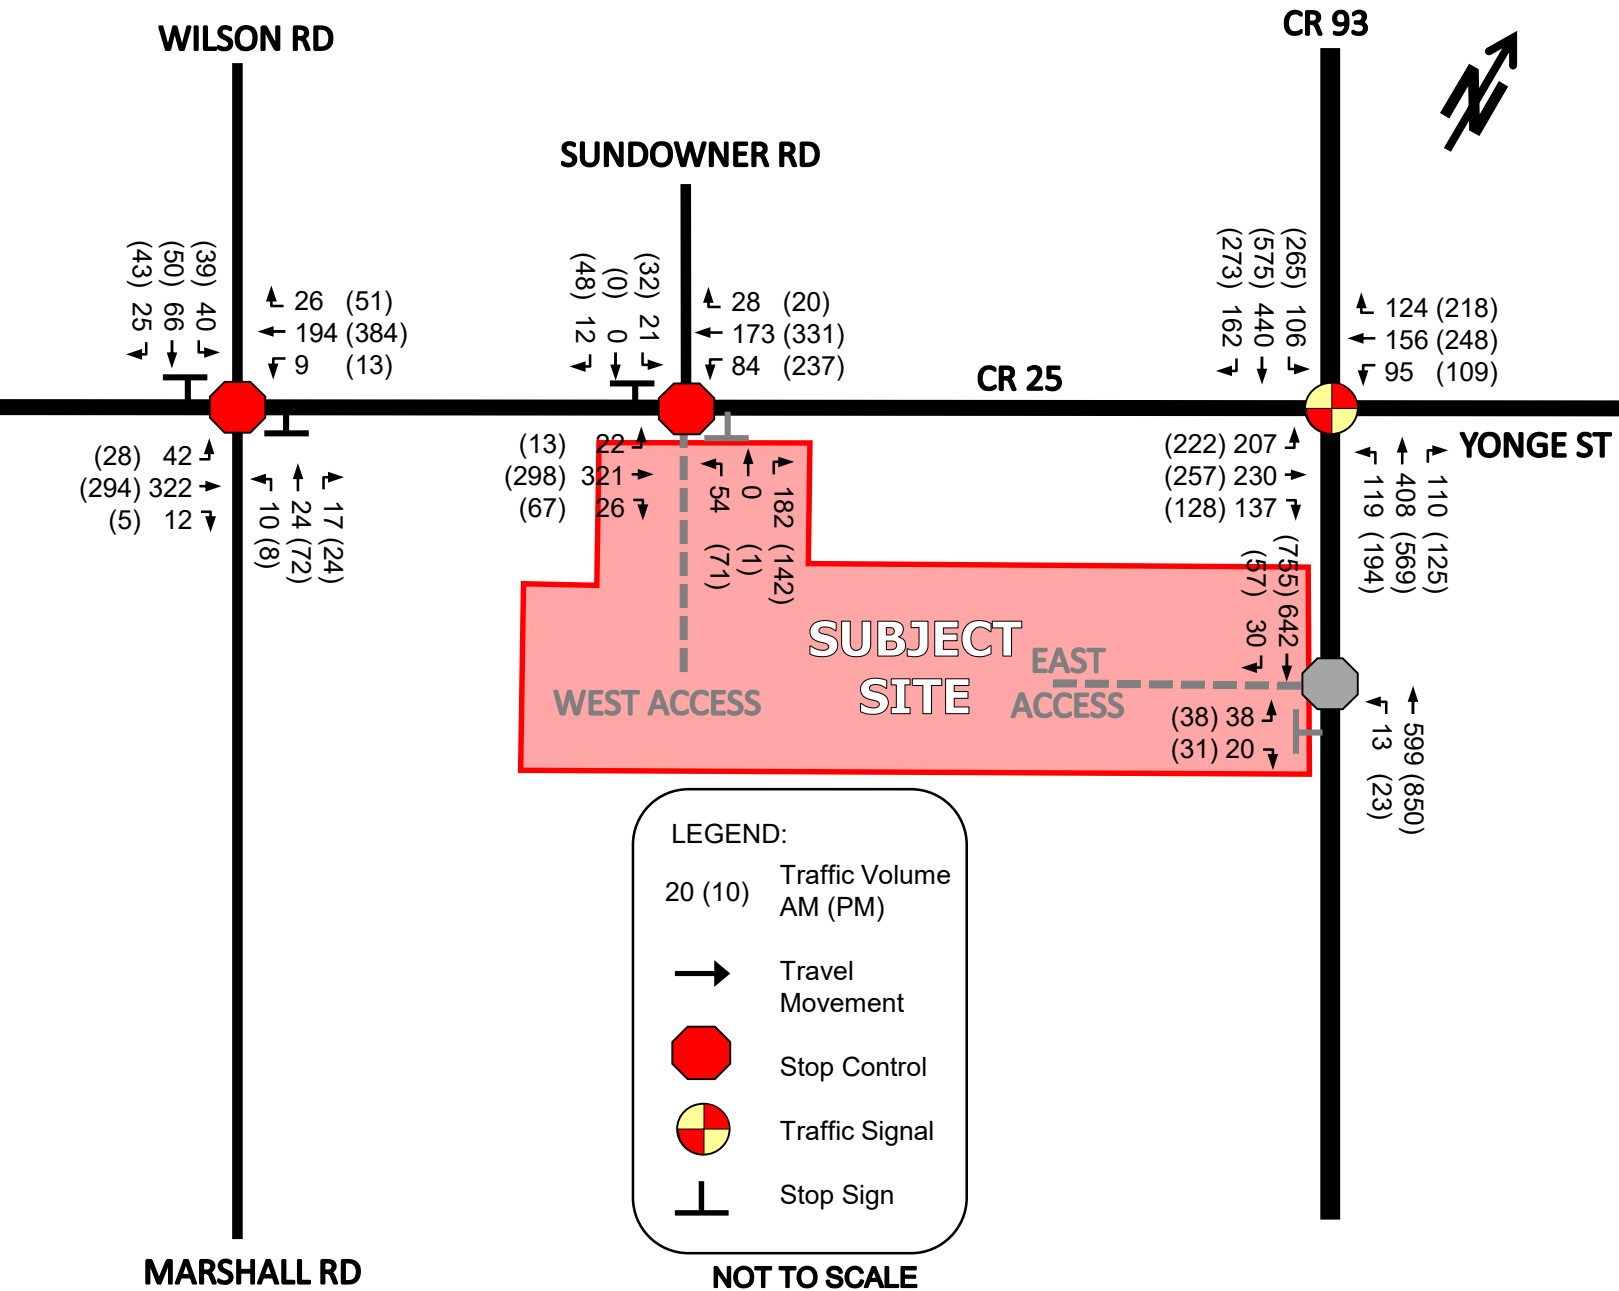


Figure 17: Total (2038) Traffic Volumes


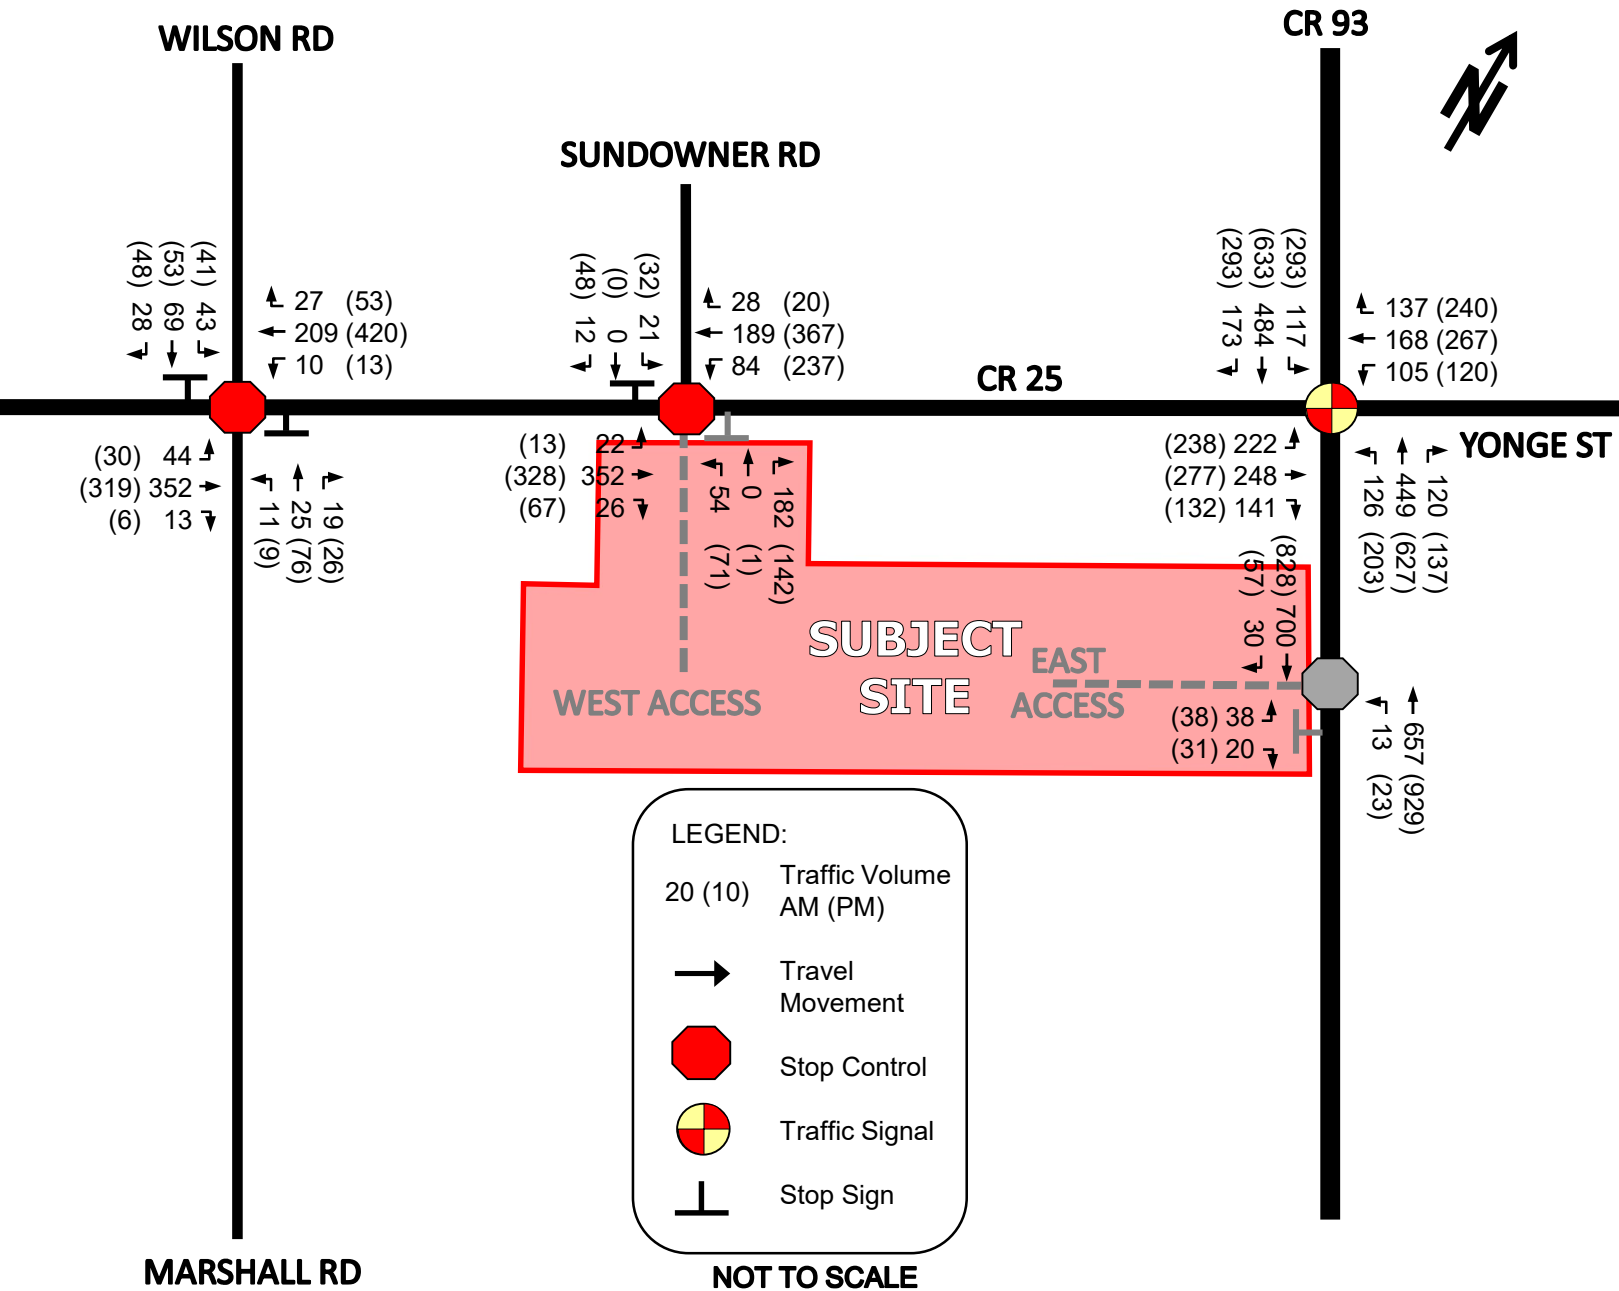



Figure 18: East Access Optimal Location



Appendix A – Site Plan

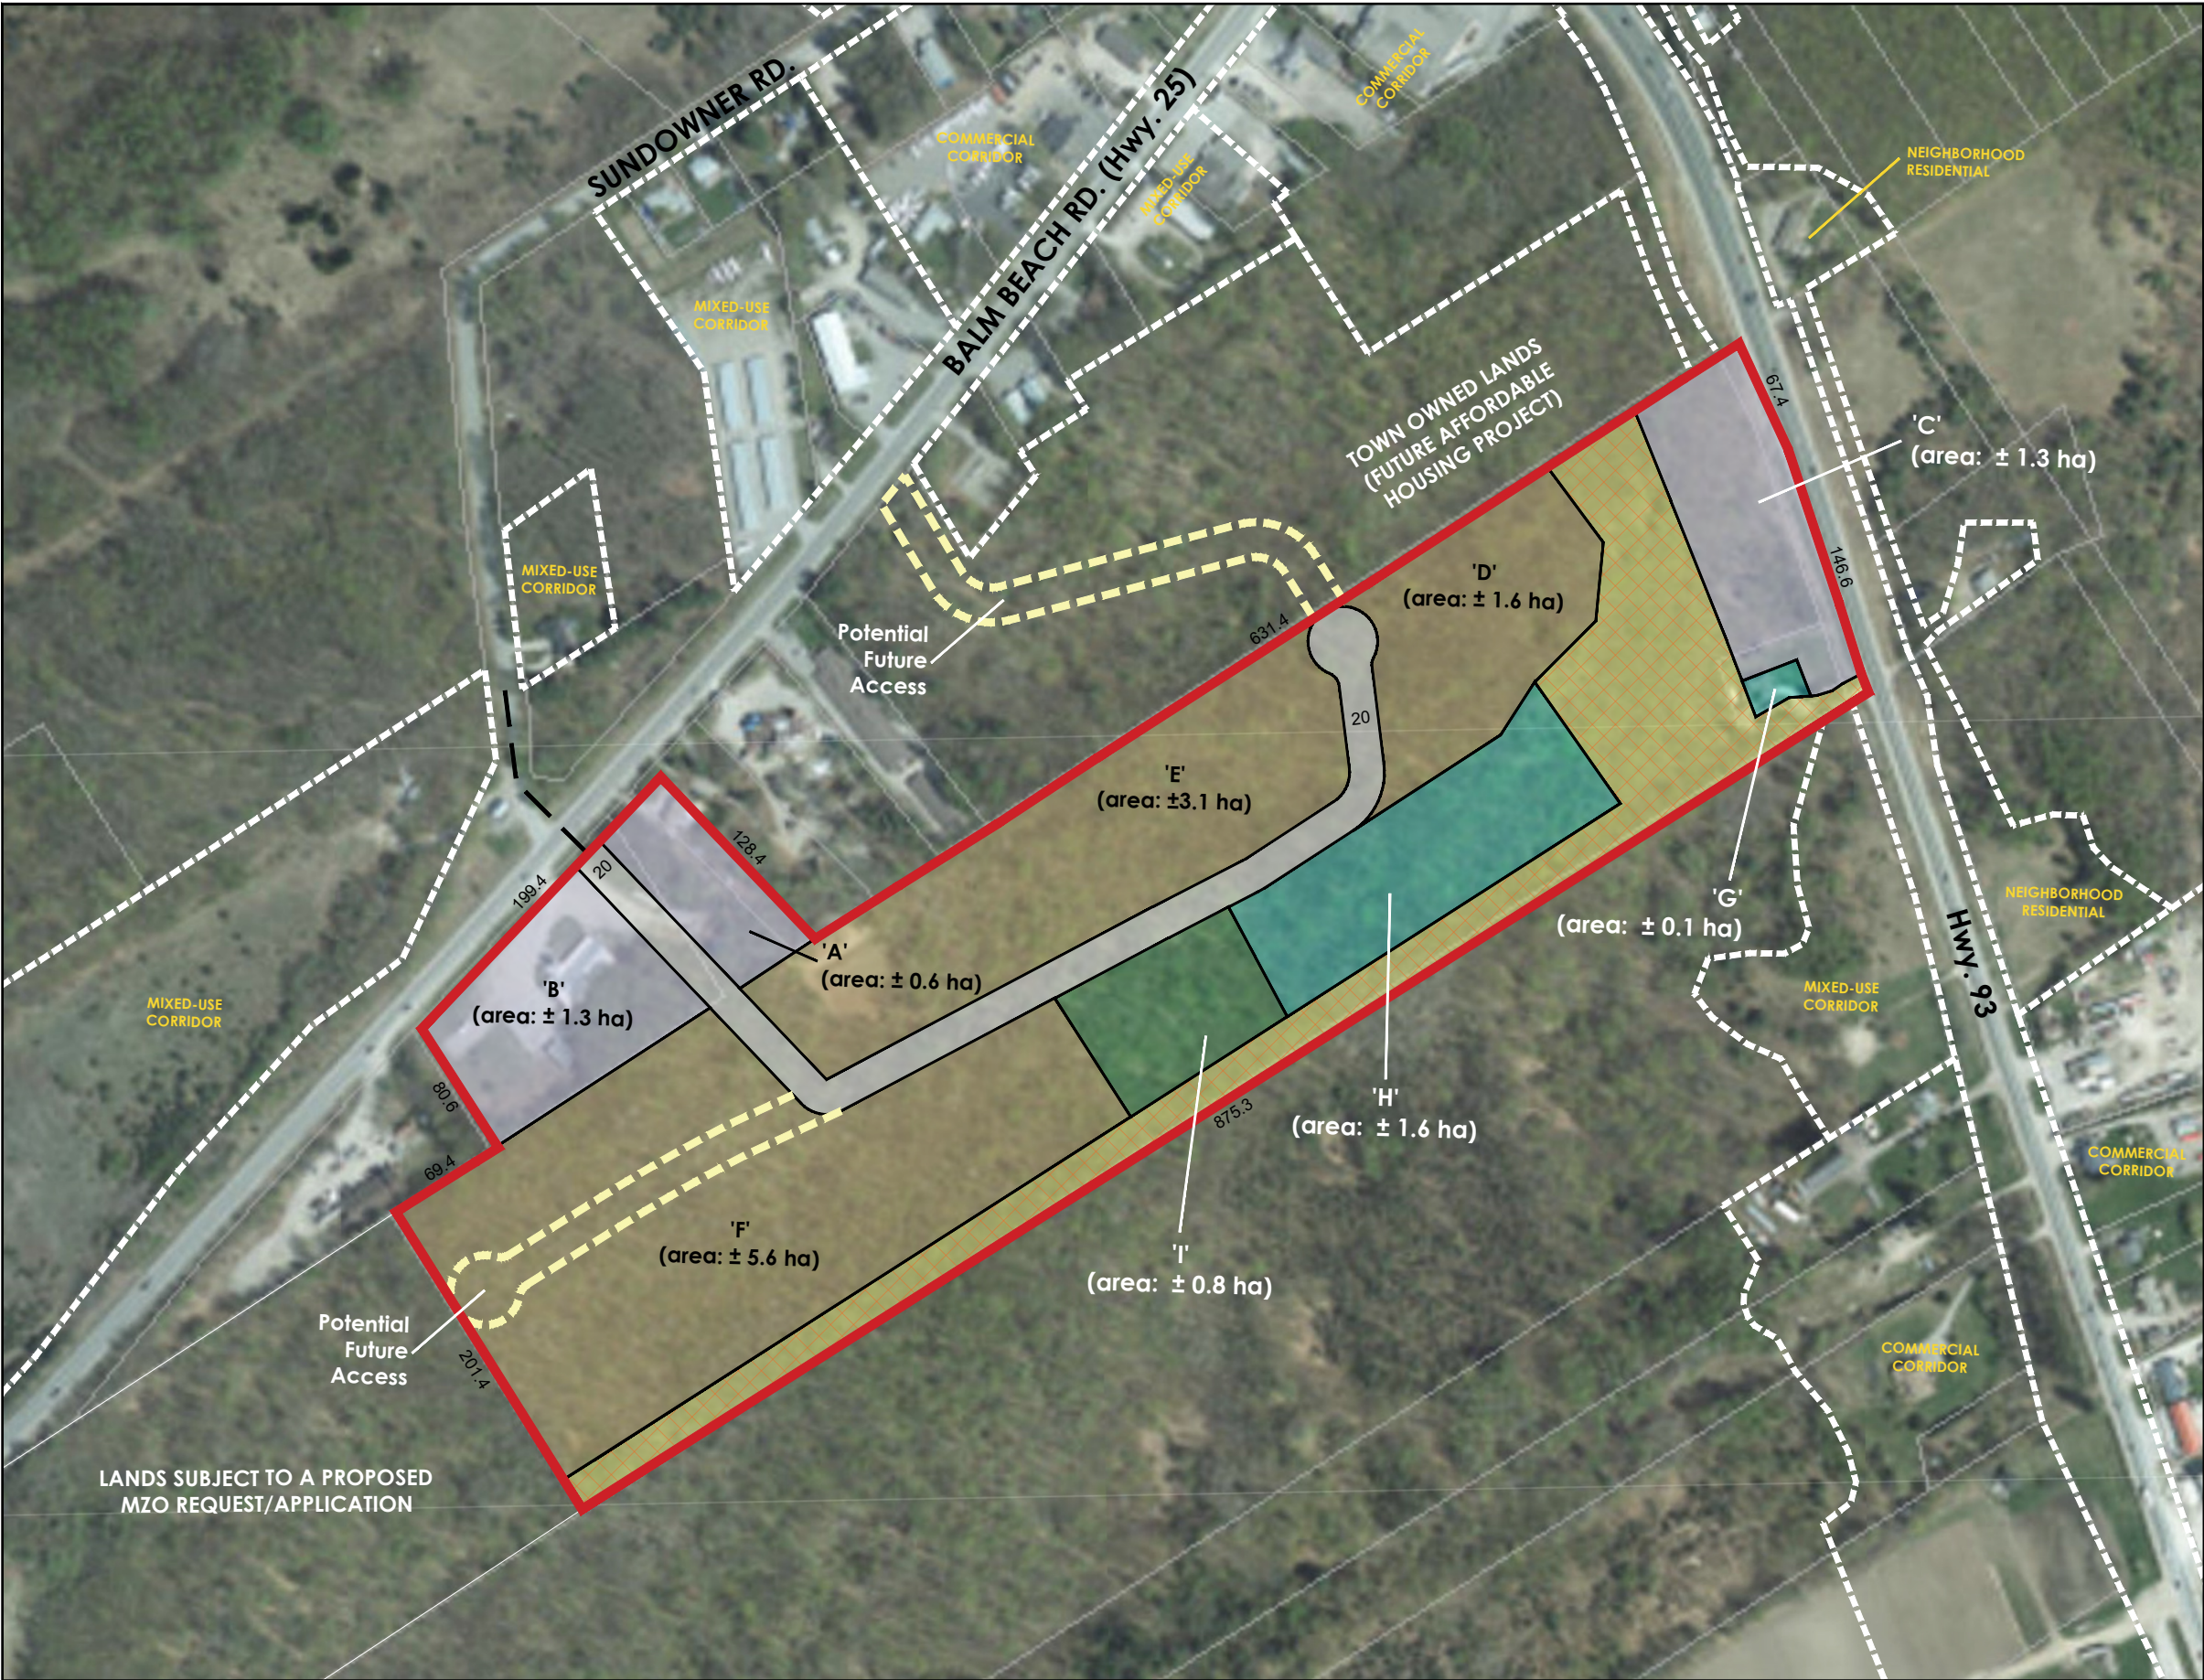

Key Map

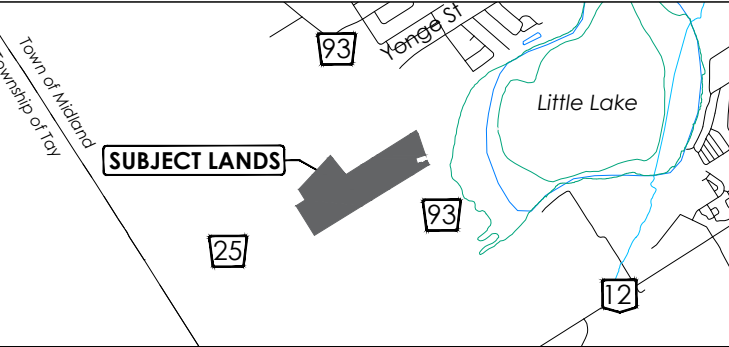

659 Balm Beach Road East,
(Lot 105 Concession 1 West of Penetanguishene Road)
Town of Midland

LEGEND

- Subject Site (± 20.6 ha)
- Mixed-Use High Density:
 - 100 units / ha: ± 320 units
- Medium Density Residential
 - 50 units / ha: ± 575 units
- S.W.M. Area (1.7 ha)
- Potential Park Area (± 0.8 ha)
- Natural Heritage Area (± 3.3 ha)
- Potential Roads - 20.0m width

* TOTAL UNITS: ± 895 units

FOR DISCUSSION PURPOSES ONLY

Note: This drawing is for discussion purposes only.
The information shown is approximate and subject to change.

0 100 200m		N	
Date:	October 1, 2021	Drawn By:	A.S.
File:	17-728	Checked By:	G.B.




INNOVATIVE PLANNING SOLUTIONS
PLANNERS • PROJECT MANAGERS • LAND DEVELOPMENT
647 WELHAM ROAD, UNIT 9, BARRIE, ON, L4N 0B7 Tel: 705-812-3281
3800 STEELS AVE. W, SUITE 200W, VAUGHAN, ON, L4L 4G9 Tel: 905-291-7525
info@ipsconsultinginc.com / www.ipsconsultinginc.com

PROPOSED OFFICIAL PLAN AMENDMENT
659 BALM BEACH ROAD

SCHEDULE OF REVISIONS			
No.	Date	Description	By
11	May 14, 2025	Revise land-use designations and road network;	A.S.
12	May 23, 2025	Revise land-use designations and road network;	A.S.
13	June 12, 2025	Add new parcel to block 'G' and 'C';	A.S.
14	June 26, 2025	Revise land-use designations;	A.S.

Appendix B – Adjacent Development Excerpts

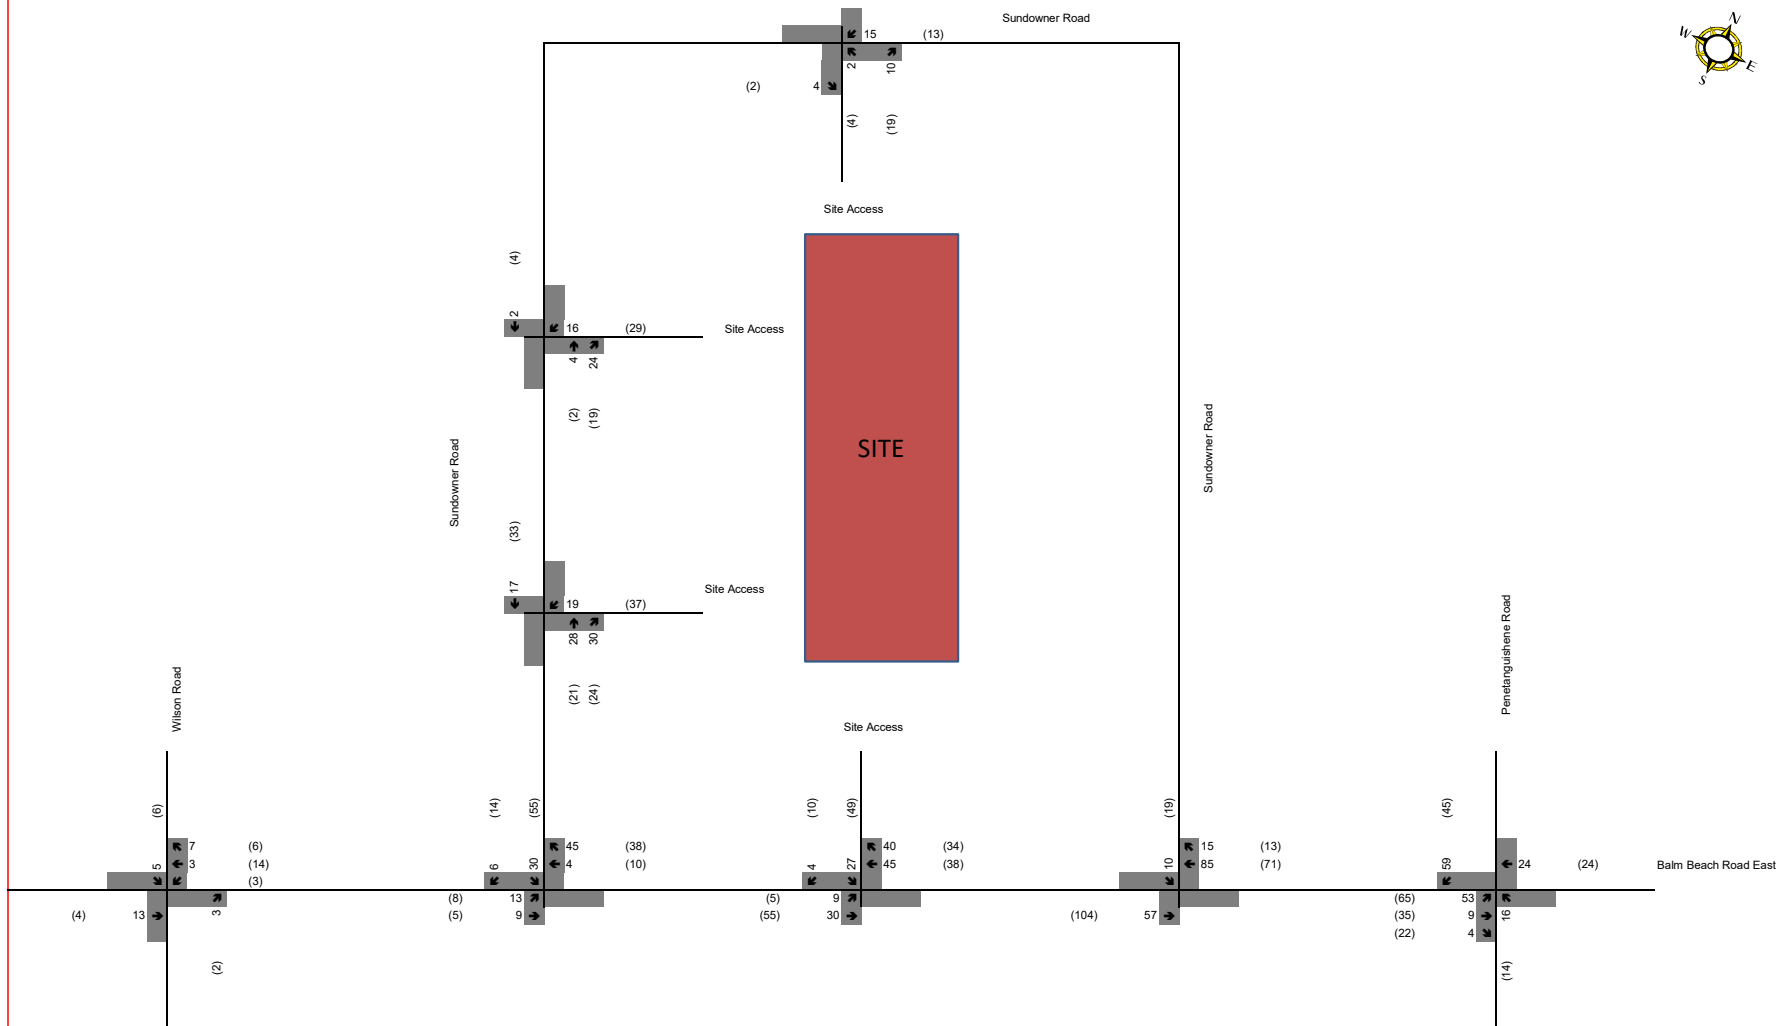

Appendix C – Traffic Count Data

Accu-Traffic Inc.

Morning Peak Diagram	Specified Period From: 7:00:00 To: 9:00:00	One Hour Peak From: 7:45:00 To: 8:45:00
Municipality: Midland Site #: 2419600001 Intersection: County Rd 93 & County Rd 25 TFR File #: 1 Count date: 5-Nov-24	Weather conditions: Person counted: Person prepared: Person checked:	
** Signalized Intersection **		Major Road: County Rd 93 runs N/S

North Leg Total: 1086 North Entering: 537 North Peds: 0 Peds Cross:	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 1</td> <td style="padding: 2px;">6</td> <td style="padding: 2px;">2</td> <td style="padding: 2px;">9</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 1</td> <td style="padding: 2px;">17</td> <td style="padding: 2px;">0</td> <td style="padding: 2px;">18</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 88</td> <td style="padding: 2px;">335</td> <td style="padding: 2px;">87</td> <td style="padding: 2px;">510</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 90</td> <td style="padding: 2px;">358</td> <td style="padding: 2px;">89</td> <td></td> </tr> </table>	Buses 1	6	2	9	Trucks 1	17	0	18	Cars 88	335	87	510	Totals 90	358	89		<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 9</td> <td style="padding: 2px;">9</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 16</td> <td style="padding: 2px;">16</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 524</td> <td style="padding: 2px;">524</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 549</td> <td style="padding: 2px;">549</td> </tr> </table>	Buses 9	9	Trucks 16	16	Cars 524	524	Totals 549	549	East Leg Total: 594 East Entering: 279 East Peds: 0 Peds Cross:
Buses 1	6	2	9																								
Trucks 1	17	0	18																								
Cars 88	335	87	510																								
Totals 90	358	89																									
Buses 9	9																										
Trucks 16	16																										
Cars 524	524																										
Totals 549	549																										

Buses	Trucks	Cars	Totals
3	8	233	244

County Rd 25

Buses	Trucks	Cars	Totals
0	4	111	115
2	4	138	144
1	2	29	32
3	10	278	

County Rd 93

Cars	Trucks	Buses	Totals
99	0	5	104
99	1	1	101
70	4	0	74
268	5	6	

Yonge St

Cars	Trucks	Buses	Totals
304	5	6	315

Peds Cross: West Peds: 0 West Entering: 291 West Leg Total: 535	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 434</td> <td style="padding: 2px;">434</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 23</td> <td style="padding: 2px;">23</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 7</td> <td style="padding: 2px;">7</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 464</td> <td style="padding: 2px;">464</td> </tr> </table>	Cars 434	434	Trucks 23	23	Buses 7	7	Totals 464	464	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 46</td> <td style="padding: 2px;">314</td> <td style="padding: 2px;">79</td> <td style="padding: 2px;">439</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 6</td> <td style="padding: 2px;">12</td> <td style="padding: 2px;">1</td> <td style="padding: 2px;">19</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 1</td> <td style="padding: 2px;">4</td> <td style="padding: 2px;">2</td> <td style="padding: 2px;">7</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 53</td> <td style="padding: 2px;">330</td> <td style="padding: 2px;">82</td> <td></td> </tr> </table>	Cars 46	314	79	439	Trucks 6	12	1	19	Buses 1	4	2	7	Totals 53	330	82		Peds Cross: South Peds: 0 South Entering: 465 South Leg Total: 929
Cars 434	434																										
Trucks 23	23																										
Buses 7	7																										
Totals 464	464																										
Cars 46	314	79	439																								
Trucks 6	12	1	19																								
Buses 1	4	2	7																								
Totals 53	330	82																									

Comments

Accu-Traffic Inc.

Afternoon Peak Diagram	Specified Period From: 16:00:00 To: 19:00:00	One Hour Peak From: 16:00:00 To: 17:00:00
Municipality: Midland Site #: 2419600001 Intersection: County Rd 93 & County Rd 25 TFR File #: 1 Count date: 5-Nov-24	Weather conditions: Person counted: Person prepared: Person checked:	
** Signalized Intersection **	Major Road: County Rd 93 runs N/S	

North Leg Total: 1626 North Entering: 850 North Peds: 2 Peds Cross:	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 0</td> <td style="padding: 2px;">9</td> <td style="padding: 2px;">0</td> <td style="border-right: 1px solid black; padding: 2px;">9</td> <td style="padding: 2px;">↑</td> <td style="border-right: 1px solid black; padding: 2px;">Buses 5</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 0</td> <td style="padding: 2px;">8</td> <td style="padding: 2px;">1</td> <td style="border-right: 1px solid black; padding: 2px;">9</td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;">Trucks 6</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 162</td> <td style="padding: 2px;">449</td> <td style="padding: 2px;">221</td> <td style="border-right: 1px solid black; padding: 2px;">832</td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;">Cars 765</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 162</td> <td style="padding: 2px;">466</td> <td style="padding: 2px;">222</td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;">Totals 776</td> <td style="padding: 2px;"></td> </tr> </table>	Buses 0	9	0	9	↑	Buses 5		Trucks 0	8	1	9		Trucks 6		Cars 162	449	221	832		Cars 765		Totals 162	466	222			Totals 776		East Leg Total: 901 East Entering: 415 East Peds: 2 Peds Cross:
Buses 0	9	0	9	↑	Buses 5																									
Trucks 0	8	1	9		Trucks 6																									
Cars 162	449	221	832		Cars 765																									
Totals 162	466	222			Totals 776																									

Buses	Trucks	Cars	Totals
0	7	374	381

← County Rd 25

Buses	Trucks	Cars	Totals
0	0	128	128
1	0	166	167
0	2	37	39
1	2	331	

↑
→
↓

County Rd 93

Cars	Trucks	Buses	Totals
180	1	1	182
149	1	0	150
81	2	0	83
410	4	1	

↑
←
↓

Yonge St →

Cars	Trucks	Buses	Totals
482	3	1	486

Peds Cross: West Peds: 0 West Entering: 334 West Leg Total: 715	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 567</td> <td style="padding: 2px;">63</td> <td style="padding: 2px;">457</td> <td style="padding: 2px;">95</td> <td style="border-right: 1px solid black; padding: 2px;">615</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 12</td> <td style="padding: 2px;">6</td> <td style="padding: 2px;">5</td> <td style="padding: 2px;">2</td> <td style="border-right: 1px solid black; padding: 2px;">13</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 9</td> <td style="padding: 2px;">0</td> <td style="padding: 2px;">4</td> <td style="padding: 2px;">0</td> <td style="border-right: 1px solid black; padding: 2px;">4</td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 588</td> <td style="padding: 2px;">69</td> <td style="padding: 2px;">466</td> <td style="padding: 2px;">97</td> <td style="border-right: 1px solid black; padding: 2px;"></td> </tr> </table> ↓	Cars 567	63	457	95	615	Trucks 12	6	5	2	13	Buses 9	0	4	0	4	Totals 588	69	466	97		Peds Cross: South Peds: 0 South Entering: 632 South Leg Total: 1220
Cars 567	63	457	95	615																		
Trucks 12	6	5	2	13																		
Buses 9	0	4	0	4																		
Totals 588	69	466	97																			

Comments

Accu-Traffic Inc.

Morning Peak Diagram

Specified Period

From: 7:00:00

To: 9:00:00

One Hour Peak

From: 8:00:00

To: 9:00:00

Municipality: Midland

Site #: 2419600002

Intersection: County Rd 25 & Sundowner Rd

TFR File #: 1

Count date: 5-Nov-24

Weather conditions:

Person counted:

Person prepared:

Person checked:

** Non-Signalized Intersection **

Major Road: County Rd 25 runs W/E

North Leg Total: 35

North Entering: 15

North Peds: 0

Peds Cross: 

Buses	0	0	2	2
Trucks	0	0	0	0
Cars	9	0	4	13
Totals	9	0	6	

Buses 0

Trucks 1

Cars 19

Totals 20

East Leg Total: 400

East Entering: 139

East Peds: 0

Peds Cross: 

Buses	Trucks	Cars	Totals
1	4	137	142



County Rd 25

Buses	Trucks	Cars	Totals
0	0	15	15
1	4	250	255
0	0	1	1
1	4	266	


Peds Cross: 

West Peds: 0

West Entering: 271

West Leg Total: 413

Cars	2
Trucks	0
Buses	0
Totals	2



Cars	0	0	0	0
Trucks	0	0	0	0
Buses	0	0	0	0
Totals	0	0	0	0


Peds Cross: 

South Peds: 0

South Entering: 0

South Leg Total: 2

Sundowner Rd



Cars	Trucks	Buses	Totals
4	1	0	5
128	4	1	133
1	0	0	1
133	5	1	

County Rd 25



Cars	Trucks	Buses	Totals
254	4	3	261

Driveway



Comments

Accu-Traffic Inc.

Afternoon Peak Diagram		Specified Period From: 16:00:00 To: 19:00:00	One Hour Peak From: 16:00:00 To: 17:00:00
Municipality: Midland Site #: 2419600002 Intersection: County Rd 25 & Sundowner Rd TFR File #: 1 Count date: 5-Nov-24		Weather conditions: Person counted: Person prepared: Person checked:	
** Non-Signalized Intersection **		Major Road: County Rd 25 runs W/E	

North Leg Total: 56 North Entering: 45 North Peds: 0 Peds Cross:	<table style="width: 100%; border-collapse: collapse;"> <tr><td>Buses</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Trucks</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Cars</td><td>41</td><td>0</td><td>4</td><td>45</td></tr> <tr><td>Totals</td><td>41</td><td>0</td><td>4</td><td></td></tr> </table>	Buses	0	0	0	0	Trucks	0	0	0	0	Cars	41	0	4	45	Totals	41	0	4			<table style="width: 100%; border-collapse: collapse;"> <tr><td>Buses</td><td>0</td></tr> <tr><td>Trucks</td><td>0</td></tr> <tr><td>Cars</td><td>11</td></tr> <tr><td>Totals</td><td>11</td></tr> </table>	Buses	0	Trucks	0	Cars	11	Totals	11	East Leg Total: 538 East Entering: 290 East Peds: 0 Peds Cross:
Buses	0	0	0	0																												
Trucks	0	0	0	0																												
Cars	41	0	4	45																												
Totals	41	0	4																													
Buses	0																															
Trucks	0																															
Cars	11																															
Totals	11																															

Buses	Trucks	Cars	Totals
0	5	327	332

Sundowner Rd

Cars	Trucks	Buses	Totals
1	0	0	1
284	5	0	289
0	0	0	0
285	5	0	

County Rd 25

N
S
E
W

County Rd 25

Buses	Trucks	Cars	Totals
0	0	9	9
1	0	243	244
0	0	0	0
1	0	252	

Driveway

Cars	Trucks	Buses	Totals
247	0	1	248

Peds Cross: West Peds: 0 West Entering: 253 West Leg Total: 585	<table style="width: 100%; border-collapse: collapse;"> <tr><td>Cars</td><td>0</td></tr> <tr><td>Trucks</td><td>0</td></tr> <tr><td>Buses</td><td>0</td></tr> <tr><td>Totals</td><td>0</td></tr> </table>	Cars	0	Trucks	0	Buses	0	Totals	0		<table style="width: 100%; border-collapse: collapse;"> <tr><td>Cars</td><td>2</td><td>1</td><td>0</td><td>3</td></tr> <tr><td>Trucks</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Buses</td><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>Totals</td><td>2</td><td>1</td><td>0</td><td></td></tr> </table>	Cars	2	1	0	3	Trucks	0	0	0	0	Buses	0	0	0	0	Totals	2	1	0		Peds Cross: South Peds: 0 South Entering: 3 South Leg Total: 3
Cars	0																															
Trucks	0																															
Buses	0																															
Totals	0																															
Cars	2	1	0	3																												
Trucks	0	0	0	0																												
Buses	0	0	0	0																												
Totals	2	1	0																													

Comments

Accu-Traffic Inc.

Morning Peak Diagram		Specified Period From: 7:00:00 To: 9:00:00	One Hour Peak From: 8:00:00 To: 9:00:00
Municipality: Midland Site #: 2419600003 Intersection: County Rd 25 & Wilson Rd TFR File #: 1 Count date: 5-Nov-24		Weather conditions: Person counted: Person prepared: Person checked:	
** Non-Signalized Intersection **		Major Road: County Rd 25 runs W/E	

North Leg Total: 178 North Entering: 106 North Peds: 0 Peds Cross:	<table style="width: 100%; border-collapse: collapse;"> <tr><td>Buses</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>Trucks</td><td>3</td><td>2</td><td>1</td><td>6</td></tr> <tr><td>Cars</td><td>18</td><td>57</td><td>24</td><td>99</td></tr> <tr><td>Totals</td><td>21</td><td>60</td><td>25</td><td></td></tr> </table>	Buses	0	1	0	1	Trucks	3	2	1	6	Cars	18	57	24	99	Totals	21	60	25			<table style="width: 100%; border-collapse: collapse;"> <tr><td>Buses</td><td>3</td></tr> <tr><td>Trucks</td><td>6</td></tr> <tr><td>Cars</td><td>63</td></tr> <tr><td>Totals</td><td>72</td></tr> </table>	Buses	3	Trucks	6	Cars	63	Totals	72	East Leg Total: 411 East Entering: 134 East Peds: 0 Peds Cross:
Buses	0	1	0	1																												
Trucks	3	2	1	6																												
Cars	18	57	24	99																												
Totals	21	60	25																													
Buses	3																															
Trucks	6																															
Cars	63																															
Totals	72																															

Buses	Trucks	Cars	Totals
1	7	139	147

Wilson Rd

Cars	Trucks	Buses	Totals
11	1	0	12
113	4	1	118
4	0	0	4
128	5	1	

N
S
W
E

Buses	Trucks	Cars	Totals
1	3	34	38
1	4	236	241
0	0	11	11
2	7	281	

County Rd 25

County Rd 25

Buses	Trucks	Cars	Totals
1	3	34	38
1	4	236	241
0	0	11	11
2	7	281	

Marshall Rd

Cars	Trucks	Buses	Totals
270	5	2	277

Peds Cross: West Peds: 0 West Entering: 290 West Leg Total: 437	<table style="width: 100%; border-collapse: collapse;"> <tr><td>Cars</td><td>72</td></tr> <tr><td>Trucks</td><td>2</td></tr> <tr><td>Buses</td><td>1</td></tr> <tr><td>Totals</td><td>75</td></tr> </table>	Cars	72	Trucks	2	Buses	1	Totals	75		<table style="width: 100%; border-collapse: collapse;"> <tr><td>Cars</td><td>8</td><td>18</td><td>10</td><td>36</td></tr> <tr><td>Trucks</td><td>0</td><td>2</td><td>0</td><td>2</td></tr> <tr><td>Buses</td><td>0</td><td>2</td><td>1</td><td>3</td></tr> <tr><td>Totals</td><td>8</td><td>22</td><td>11</td><td></td></tr> </table>	Cars	8	18	10	36	Trucks	0	2	0	2	Buses	0	2	1	3	Totals	8	22	11		Peds Cross: South Peds: 0 South Entering: 41 South Leg Total: 116
Cars	72																															
Trucks	2																															
Buses	1																															
Totals	75																															
Cars	8	18	10	36																												
Trucks	0	2	0	2																												
Buses	0	2	1	3																												
Totals	8	22	11																													

Comments

Accu-Traffic Inc.

Afternoon Peak Diagram	Specified Period From: 16:00:00 To: 19:00:00	One Hour Peak From: 16:00:00 To: 17:00:00
Municipality: Midland Site #: 2419600003 Intersection: County Rd 25 & Wilson Rd TFR File #: 1 Count date: 5-Nov-24	Weather conditions: Person counted: Person prepared: Person checked:	
** Non-Signalized Intersection **		Major Road: County Rd 25 runs W/E

North Leg Total: 230 North Entering: 102 North Peds: 0 Peds Cross:	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 0</td> <td style="padding: 2px;">1</td> <td style="padding: 2px;">0</td> <td style="border-right: 1px solid black; padding: 2px;">1</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 3</td> <td style="padding: 2px;">2</td> <td style="padding: 2px;">0</td> <td style="border-right: 1px solid black; padding: 2px;">5</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 33</td> <td style="padding: 2px;">43</td> <td style="padding: 2px;">20</td> <td style="border-right: 1px solid black; padding: 2px;">96</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 36</td> <td style="padding: 2px;">46</td> <td style="padding: 2px;">20</td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> </tr> </table>	Buses 0	1	0	1		Trucks 3	2	0	5		Cars 33	43	20	96		Totals 36	46	20			<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Buses 0</td> <td style="padding: 2px;"></td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Trucks 4</td> <td style="padding: 2px;"></td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 124</td> <td style="padding: 2px;"></td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">Totals 128</td> <td style="padding: 2px;"></td> <td style="padding: 2px;"></td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> </tr> </table>	Buses 0					Trucks 4					Cars 124					Totals 128					East Leg Total: 563 East Entering: 327 East Peds: 0 Peds Cross:
Buses 0	1	0	1																																								
Trucks 3	2	0	5																																								
Cars 33	43	20	96																																								
Totals 36	46	20																																									
Buses 0																																											
Trucks 4																																											
Cars 124																																											
Totals 128																																											

Wilson Rd

County Rd 25

Buses Trucks Cars Totals 1 6 320 327	<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="border-right: 1px solid black; padding: 2px;">Cars 34</td> <td style="padding: 2px;">2</td> <td style="padding: 2px;">0</td> <td style="border-right: 1px solid black; padding: 2px;">36</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">280</td> <td style="padding: 2px;">3</td> <td style="padding: 2px;">1</td> <td style="border-right: 1px solid black; padding: 2px;">284</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">7</td> <td style="padding: 2px;">0</td> <td style="padding: 2px;">0</td> <td style="border-right: 1px solid black; padding: 2px;">7</td> <td style="padding: 2px;"></td> </tr> <tr> <td style="border-right: 1px solid black; padding: 2px;">321</td> <td style="padding: 2px;">5</td> <td style="padding: 2px;">1</td> <td style="border-right: 1px solid black; padding: 2px;"></td> <td style="padding: 2px;"></td> </tr> </table>	Cars 34	2	0	36		280	3	1	284		7	0	0	7		321	5	1			Cars Trucks Buses Totals 234 0 2 236	Peds Cross: South Peds: 0 South Entering: 88 South Leg Total: 146
Cars 34	2	0	36																				
280	3	1	284																				
7	0	0	7																				
321	5	1																					

Buses Trucks Cars Totals 0 2 24 26 2 0 199 201 0 0 5 5 2 2 228	Cars 55 Trucks 2 Buses 1 Totals 58	Cars 7 66 15 88 Trucks 0 0 0 0 Buses 0 0 0 0 Totals 7 66 15	Peds Cross: West Peds: 0 West Entering: 232 West Leg Total: 559
--	---	--	--

Comments

Appendix D – Synchro Analysis Output – Existing Traffic Volumes

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Existing (2025) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	117	147	75	103	106	54	337	84	91	365	92
Future Volume (vph)	117	147	75	103	106	54	337	84	91	365	92
Lane Group Flow (vph)	131	202	90	124	128	62	387	97	130	521	131
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.39	0.40	0.53	0.44	0.37	0.14	0.28	0.14	0.24	0.35	0.18
Control Delay (s/veh)	22.4	22.4	40.3	33.5	7.6	9.1	16.1	1.7	9.7	16.3	3.4
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	22.4	22.4	40.3	33.5	7.6	9.1	16.1	1.7	9.7	16.3	3.4
Queue Length 50th (m)	13.4	21.0	11.8	16.0	0.0	3.5	18.4	0.0	7.7	25.8	0.0
Queue Length 95th (m)	25.1	37.1	22.7	27.7	8.6	9.4	29.7	3.5	13.1	31.0	3.7
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	338	1119	572	940	831	449	1407	696	545	1487	746
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.39	0.18	0.16	0.13	0.15	0.14	0.28	0.14	0.24	0.35	0.18

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 74.3

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

	Ø1		Ø2		Ø4
9.5 s		37 s		53.5 s	
	Ø5		Ø6		Ø7
9.5 s		37 s		9.5 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Existing (2025) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	117	147	33	75	103	106	54	337	84	91	365	92
Future Volume (vph)	117	147	33	75	103	106	54	337	84	91	365	92
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1775		1730	1883	1527	1611	3476	1519	1783	3444	1549
Flt Permitted	0.48	1.00		0.63	1.00	1.00	0.46	1.00	1.00	0.51	1.00	1.00
Satd. Flow (perm)	899	1775		1149	1883	1527	779	3476	1519	948	3444	1549
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	131	165	37	90	124	128	62	387	97	130	521	131
RTOR Reduction (vph)	0	11	0	0	0	109	0	0	57	0	0	75
Lane Group Flow (vph)	131	191	0	90	124	19	62	387	40	130	521	56
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	20.7	20.7		11.2	11.2	11.2	34.9	31.0	31.0	37.1	32.1	32.1
Effective Green, g (s)	20.7	20.7		11.2	11.2	11.2	34.9	31.0	31.0	37.1	32.1	32.1
Actuated g/C Ratio	0.28	0.28		0.15	0.15	0.15	0.46	0.41	0.41	0.49	0.43	0.43
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	305	488		171	280	227	404	1432	626	523	1470	661
v/s Ratio Prot	0.03	c0.11			0.07		0.01	0.11		c0.02	c0.15	
v/s Ratio Perm	0.09			c0.08		0.01	0.06		0.03	0.11		0.04
v/c Ratio	0.43	0.39		0.53	0.44	0.08	0.15	0.27	0.06	0.25	0.35	0.08
Uniform Delay, d1	21.5	22.1		29.6	29.2	27.6	11.2	14.6	13.3	10.4	14.6	12.8
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	1.0	0.5		2.9	1.1	0.2	0.2	0.5	0.2	0.3	0.7	0.3
Delay (s)	22.5	22.7		32.5	30.3	27.7	11.4	15.1	13.5	10.7	15.2	13.1
Level of Service	C	C		C	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		22.6			29.9			14.4			14.1	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			18.3									B
HCM 2000 Volume to Capacity ratio			0.41									
Actuated Cycle Length (s)			75.2									
Intersection Capacity Utilization			71.3%									C
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Existing (2025) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	38	246	11	4	120	12	8	22	11	26	60	21
Future Volume (Veh/h)	38	246	11	4	120	12	8	22	11	26	60	21
Sign Control	Free			Free			Stop			Stop		
Grade	0%			0%			0%			0%		
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	48	308	14	5	162	16	12	34	17	31	71	25
Pedestrians	10			10			10			10		
Lane Width (m)	3.7			3.7			3.7			3.7		
Walking Speed (m/s)	1.1			1.1			1.1			1.1		
Percent Blockage	1			1			1			1		
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	188			332			672	619	335	645	618	190
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	188			332			672	619	335	645	618	190
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	96			100			96	91	97	90	81	97
cM capacity (veh/h)	1321			1215			287	361	678	324	377	806
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	370	183	63	127								
Volume Left	48	5	12	31								
Volume Right	14	16	17	25								
cSH	1321	1215	391	403								
Volume to Capacity	0.04	0.00	0.16	0.31								
Queue Length 95th (m)	0.9	0.1	4.3	10.1								
Control Delay (s/veh)	1.3	0.3	16.0	18.0								
Lane LOS	A	A	C	C								
Approach Delay (s/veh)	1.3	0.3	16.0	18.0								
Approach LOS			C	C								
Intersection Summary												
Average Delay				5.1								
Intersection Capacity Utilization				44.8%	ICU Level of Service				A			
Analysis Period (min)				15								

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Existing (2025) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	15	260	1	1	136	5	0	0	0	6	0	9
Future Volume (Veh/h)	15	260	1	1	136	5	0	0	0	6	0	9
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Hourly flow rate (vph)	20	342	1	1	200	7	0	0	0	8	0	12
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	217			353			610	612	353	598	609	214
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	217			353			610	612	353	598	609	214
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.4	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.8	4.0	3.3
p0 queue free %	99			100			100	100	100	98	100	99
cM capacity (veh/h)	1339			1194			386	394	684	359	396	818
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	363	208	0	20								
Volume Left	20	1	0	8								
Volume Right	1	7	0	12								
cSH	1339	1194	1700	541								
Volume to Capacity	0.01	0.00	0.00	0.04								
Queue Length 95th (m)	0.3	0.0	0.0	0.9								
Control Delay (s/veh)	0.6	0.0	0.0	11.9								
Lane LOS	A	A	A	B								
Approach Delay (s/veh)	0.6	0.0	0.0	11.9								
Approach LOS			A	B								
Intersection Summary												
Average Delay			0.8									
Intersection Capacity Utilization			34.0%	ICU Level of Service				A				
Analysis Period (min)			15									

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
659 Balm Beach Rd

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	131	170	85	153	186	70	475	99	226	475	165
Future Volume (vph)	131	170	85	153	186	70	475	99	226	475	165
Lane Group Flow (vph)	144	231	112	201	245	80	546	114	243	511	177
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.42	0.41	0.54	0.59	0.51	0.18	0.39	0.17	0.54	0.35	0.24
Control Delay (s/veh)	22.3	21.9	38.4	36.2	7.8	10.7	18.6	2.8	17.0	17.7	4.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	22.3	21.9	38.4	36.2	7.8	10.7	18.6	2.8	17.0	17.7	4.0
Queue Length 50th (m)	14.9	24.5	14.9	27.1	0.0	5.0	28.8	0.0	16.9	26.7	0.0
Queue Length 95th (m)	27.2	42.1	24.4	37.8	8.8	12.8	45.5	6.0	35.1	44.6	12.2
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	340	1102	554	906	882	451	1396	688	446	1462	745
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.42	0.21	0.20	0.22	0.28	0.18	0.39	0.17	0.54	0.35	0.24

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 77.1

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
9.5 s	37 s	53.5 s
 Ø5	 Ø6	 Ø7
9.5 s	37 s	44 s

HCM Signalized Intersection Capacity Analysis
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
659 Balm Beach Rd

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	131	170	40	85	153	186	70	475	99	226	475	165
Future Volume (vph)	131	170	40	85	153	186	70	475	99	226	475	165
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1786	1813		1781	1883	1572	1670	3579	1548	1785	3510	1548
Flt Permitted	0.44	1.00		0.61	1.00	1.00	0.46	1.00	1.00	0.41	1.00	1.00
Satd. Flow (perm)	830	1813		1152	1883	1572	815	3579	1548	763	3510	1548
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	144	187	44	112	201	245	80	546	114	243	511	177
RTOR Reduction (vph)	0	11	0	0	0	201	0	0	69	0	0	104
Lane Group Flow (vph)	144	220	0	112	201	44	80	546	45	243	511	73
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	23.4	23.4		13.9	13.9	13.9	34.9	31.0	31.0	37.1	32.1	32.1
Effective Green, g (s)	23.4	23.4		13.9	13.9	13.9	34.9	31.0	31.0	37.1	32.1	32.1
Actuated g/C Ratio	0.30	0.30		0.18	0.18	0.18	0.45	0.40	0.40	0.48	0.41	0.41
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	310	544		205	335	280	407	1424	616	428	1446	637
v/s Ratio Prot	0.03	c0.12			c0.11		0.01	0.15		c0.04	0.15	
v/s Ratio Perm	0.11			0.10		0.03	0.08		0.03	c0.23		0.05
v/c Ratio	0.46	0.40		0.55	0.60	0.16	0.20	0.38	0.07	0.57	0.35	0.11
Uniform Delay, d1	21.0	21.7		29.1	29.4	27.0	12.5	16.7	14.5	13.1	15.8	14.1
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	1.1	0.5		3.0	3.0	0.3	0.2	0.8	0.2	1.7	0.7	0.4
Delay (s)	22.1	22.2		32.1	32.5	27.3	12.7	17.4	14.8	14.8	16.4	14.5
Level of Service	C	C		C	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		22.1			30.1			16.5			15.6	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			19.9									
HCM 2000 Volume to Capacity ratio			0.59									
Actuated Cycle Length (s)			77.9									
Intersection Capacity Utilization			80.5%									
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
659 Balm Beach Rd

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	26	205	5	7	290	36	7	66	15	20	46	37
Future Volume (Veh/h)	26	205	5	7	290	36	7	66	15	20	46	37
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	31	244	6	8	337	42	8	75	17	24	54	44
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	389			260			774	724	267	758	706	378
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	389			260			774	724	267	758	706	378
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	97			99			97	78	98	90	84	93
cM capacity (veh/h)	1126			1292			243	334	757	247	336	643
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	281	387	100	122								
Volume Left	31	8	8	24								
Volume Right	6	42	17	44								
cSH	1126	1292	357	374								
Volume to Capacity	0.03	0.01	0.28	0.33								
Queue Length 95th (m)	0.6	0.1	8.6	10.6								
Control Delay (s/veh)	1.2	0.2	19.0	19.2								
Lane LOS	A	A	C	C								
Approach Delay (s/veh)	1.2	0.2	19.0	19.2								
Approach LOS			C	C								
Intersection Summary												
Average Delay			5.2									
Intersection Capacity Utilization			43.5%	ICU Level of Service				A				
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
659 Balm Beach Rd

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	9	249	0	0	295	1	2	1	0	4	0	41
Future Volume (Veh/h)	9	249	0	0	295	1	2	1	0	4	0	41
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Hourly flow rate (vph)	10	271	0	0	347	1	4	2	0	5	0	51
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	358			281			700	659	281	650	659	358
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	358			281			700	659	281	650	659	358
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	99			100			99	99	100	99	100	92
cM capacity (veh/h)	1189			1269			318	373	750	369	373	680
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	281	348	6	56								
Volume Left	10	0	4	5								
Volume Right	0	1	0	51								
cSH	1189	1269	334	632								
Volume to Capacity	0.01	0.00	0.02	0.09								
Queue Length 95th (m)	0.2	0.0	0.4	2.2								
Control Delay (s/veh)	0.4	0.0	16.0	11.2								
Lane LOS	A		C	B								
Approach Delay (s/veh)	0.4	0.0	16.0	11.2								
Approach LOS			C	B								
Intersection Summary												
Average Delay			1.2									
Intersection Capacity Utilization			30.4%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
659 Balm Beach Rd

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	0	0	0	644	600	0
Future Volume (Veh/h)	0	0	0	644	600	0
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.93	0.93
Hourly flow rate (vph)	0	0	0	740	645	0
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1395	655	655			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1395	655	655			
tC, single (s)	6.4	6.2	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	100	100	100			
cM capacity (veh/h)	154	462	923			
Direction, Lane #	EB 1	NB 1	SB 1			
Volume Total	0	740	645			
Volume Left	0	0	0			
Volume Right	0	0	0			
cSH	1700	923	1700			
Volume to Capacity	0.00	0.00	0.38			
Queue Length 95th (m)	0.0	0.0	0.0			
Control Delay (s/veh)	0.0	0.0	0.0			
Lane LOS	A					
Approach Delay (s/veh)	0.0	0.0	0.0			
Approach LOS	A					
Intersection Summary						
Average Delay		0.0				
Intersection Capacity Utilization		43.9%		ICU Level of Service		A
Analysis Period (min)		15				

Intersection Sign configuration not allowed in HCM analysis.

Appendix E – Synchro Analysis Output – Background Traffic Volumes

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2028) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	151	161	80	121	113	65	357	89	96	388	127
Future Volume (vph)	151	161	80	121	113	65	357	89	96	388	127
Lane Group Flow (vph)	170	223	96	146	136	75	410	102	137	554	181
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.50	0.43	0.54	0.49	0.38	0.17	0.29	0.15	0.26	0.38	0.24
Control Delay (s/veh)	24.6	22.7	40.2	34.2	8.1	9.8	16.7	2.0	10.4	17.0	3.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	24.6	22.7	40.2	34.2	8.1	9.8	16.7	2.0	10.4	17.0	3.8
Queue Length 50th (m)	17.9	23.6	12.7	19.0	0.0	4.4	19.9	0.0	8.3	28.3	0.0
Queue Length 95th (m)	31.5	40.6	23.8	31.7	9.8	11.4	32.8	4.2	14.6	34.1	4.8
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	343	1106	556	930	824	429	1392	690	531	1472	762
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.50	0.20	0.17	0.16	0.17	0.17	0.29	0.15	0.26	0.38	0.24

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 75.1

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
9.5 s	37 s	53.5 s
 Ø5	 Ø6	 Ø7
9.5 s	37 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2028) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	151	161	37	80	121	113	65	357	89	96	388	127
Future Volume (vph)	151	161	37	80	121	113	65	357	89	96	388	127
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1773		1730	1883	1527	1611	3476	1519	1783	3444	1548
Flt Permitted	0.48	1.00		0.62	1.00	1.00	0.44	1.00	1.00	0.49	1.00	1.00
Satd. Flow (perm)	897	1773		1128	1883	1527	745	3476	1519	927	3444	1548
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	170	181	42	96	146	136	75	410	102	137	554	181
RTOR Reduction (vph)	0	11	0	0	0	115	0	0	60	0	0	104
Lane Group Flow (vph)	170	212	0	96	146	21	75	410	42	137	554	77
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	21.4	21.4		11.9	11.9	11.9	34.9	31.0	31.0	37.1	32.1	32.1
Effective Green, g (s)	21.4	21.4		11.9	11.9	11.9	34.9	31.0	31.0	37.1	32.1	32.1
Actuated g/C Ratio	0.28	0.28		0.16	0.16	0.16	0.46	0.41	0.41	0.49	0.42	0.42
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	310	499		176	295	239	387	1419	620	509	1456	654
v/s Ratio Prot	c0.04	0.12			0.08		0.01	0.12		c0.02	c0.16	
v/s Ratio Perm	c0.12			0.09		0.01	0.08		0.03	0.11		0.05
v/c Ratio	0.55	0.42		0.55	0.49	0.09	0.19	0.29	0.07	0.27	0.38	0.12
Uniform Delay, d1	22.3	22.2		29.5	29.3	27.4	11.6	15.1	13.7	10.8	15.1	13.3
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	2.0	0.6		3.4	1.3	0.2	0.2	0.5	0.2	0.3	0.8	0.4
Delay (s)	24.3	22.8		32.9	30.6	27.5	11.9	15.6	13.9	11.0	15.8	13.7
Level of Service	C	C		C	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		23.5			30.1			14.8			14.6	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			18.8				HCM 2000 Level of Service			B		
HCM 2000 Volume to Capacity ratio			0.47									
Actuated Cycle Length (s)			75.9				Sum of lost time (s)			23.0		
Intersection Capacity Utilization			72.6%				ICU Level of Service			C		
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
BG (2028) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	40	268	11	4	130	15	9	23	14	30	62	23
Future Volume (Veh/h)	40	268	11	4	130	15	9	23	14	30	62	23
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	50	335	14	5	176	20	14	36	22	35	73	27
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	206			359			722	668	362	698	665	206
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	206			359			722	668	362	698	665	206
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	96			100			95	89	97	88	79	97
cM capacity (veh/h)	1301			1188			260	337	654	293	354	789
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	399	201	72	135								
Volume Left	50	5	14	35								
Volume Right	14	20	22	27								
cSH	1301	1188	371	375								
Volume to Capacity	0.04	0.00	0.19	0.36								
Queue Length 95th (m)	0.9	0.1	5.4	12.2								
Control Delay (s/veh)	1.3	0.2	17.0	19.9								
Lane LOS	A	A	C	C								
Approach Delay (s/veh)	1.3	0.2	17.0	19.9								
Approach LOS			C	C								
Intersection Summary												
Average Delay			5.6									
Intersection Capacity Utilization			47.3%	ICU Level of Service				A				
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
BG (2028) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	22	281	1	1	146	28	0	0	0	21	0	12
Future Volume (Veh/h)	22	281	1	1	146	28	0	0	0	21	0	12
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Hourly flow rate (vph)	29	370	1	1	215	41	0	0	0	28	0	16
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	266			381			692	707	381	676	687	246
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	266			381			692	707	381	676	687	246
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.4	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.8	4.0	3.3
p0 queue free %	98			100			100	100	100	91	100	98
cM capacity (veh/h)	1285			1166			336	345	660	315	354	786
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	400	257	0	44								
Volume Left	29	1	0	28								
Volume Right	1	41	0	16								
cSH	1285	1166	1700	403								
Volume to Capacity	0.02	0.00	0.00	0.11								
Queue Length 95th (m)	0.5	0.0	0.0	2.8								
Control Delay (s/veh)	0.8	0.0	0.0	15.0								
Lane LOS	A	A	A	C								
Approach Delay (s/veh)	0.8	0.0	0.0	15.0								
Approach LOS			A	C								
Intersection Summary												
Average Delay			1.4									
Intersection Capacity Utilization			40.1%		ICU Level of Service				A			
Analysis Period (min)			15									

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2028) - PM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	172	199	90	174	197	82	504	105	240	504	198
Future Volume (vph)	172	199	90	174	197	82	504	105	240	504	198
Lane Group Flow (vph)	189	277	118	229	259	94	579	121	258	542	213
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.58	0.48	0.55	0.63	0.52	0.22	0.42	0.18	0.62	0.38	0.28
Control Delay (s/veh)	26.5	22.8	38.4	36.7	8.7	11.6	19.7	3.3	20.7	18.7	4.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	26.5	22.8	38.4	36.7	8.7	11.6	19.7	3.3	20.7	18.7	4.0
Queue Length 50th (m)	20.1	30.4	15.9	31.4	2.1	6.4	32.6	0.0	19.4	30.2	0.0
Queue Length 95th (m)	34.5	50.6	25.6	42.4	11.0	15.0	49.7	7.2	#40.6	48.7	13.4
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	328	1080	521	890	869	425	1372	679	419	1437	757
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.58	0.26	0.23	0.26	0.30	0.22	0.42	0.18	0.62	0.38	0.28

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 78.5

Natural Cycle: 100

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
9.5 s	37 s	53.5 s
 Ø5	 Ø6	 Ø7
9.5 s	37 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

BG (2028) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	172	199	53	90	174	197	82	504	105	240	504	198
Future Volume (vph)	172	199	53	90	174	197	82	504	105	240	504	198
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1786	1806		1781	1883	1572	1670	3579	1547	1786	3510	1547
Flt Permitted	0.40	1.00		0.59	1.00	1.00	0.44	1.00	1.00	0.38	1.00	1.00
Satd. Flow (perm)	758	1806		1105	1883	1572	771	3579	1547	715	3510	1547
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	189	219	58	118	229	259	94	579	121	258	542	213
RTOR Reduction (vph)	0	12	0	0	0	195	0	0	74	0	0	127
Lane Group Flow (vph)	189	265	0	118	229	64	94	579	47	258	542	86
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	24.8	24.8		15.3	15.3	15.3	34.9	31.0	31.0	37.1	32.1	32.1
Effective Green, g (s)	24.8	24.8		15.3	15.3	15.3	34.9	31.0	31.0	37.1	32.1	32.1
Actuated g/C Ratio	0.31	0.31		0.19	0.19	0.19	0.44	0.39	0.39	0.47	0.40	0.40
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	301	564		213	363	303	383	1399	604	402	1420	626
v/s Ratio Prot	c0.04	0.15			0.12		0.01	0.16		c0.04	0.15	
v/s Ratio Perm	c0.16			0.11		0.04	0.10		0.03	c0.26		0.06
v/c Ratio	0.63	0.47		0.55	0.63	0.21	0.25	0.41	0.08	0.64	0.38	0.14
Uniform Delay, d1	22.6	21.9		28.9	29.4	26.9	13.2	17.5	15.2	14.5	16.6	14.9
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	4.1	0.6		3.1	3.6	0.3	0.3	0.9	0.3	3.5	0.8	0.5
Delay (s)	26.7	22.6		32.0	33.0	27.3	13.5	18.5	15.4	18.0	17.4	15.3
Level of Service	C	C		C	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		24.2			30.3			17.4			17.1	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			21.1				HCM 2000 Level of Service			C		
HCM 2000 Volume to Capacity ratio			0.69									
Actuated Cycle Length (s)			79.3				Sum of lost time (s)			23.0		
Intersection Capacity Utilization			83.2%				ICU Level of Service			E		
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
BG (2028) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	27	220	5	9	314	40	8	69	16	25	48	39
Future Volume (Veh/h)	27	220	5	9	314	40	8	69	16	25	48	39
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	32	262	6	10	365	47	9	78	18	29	56	46
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	422			278			832	781	285	815	761	409
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	422			278			832	781	285	815	761	409
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	97			99			96	75	98	87	82	93
cM capacity (veh/h)	1095			1272			216	308	739	219	311	618
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	300	422	105	131								
Volume Left	32	10	9	29								
Volume Right	6	47	18	46								
cSH	1095	1272	329	339								
Volume to Capacity	0.03	0.01	0.32	0.39								
Queue Length 95th (m)	0.7	0.2	10.2	13.5								
Control Delay (s/veh)	1.2	0.3	21.0	22.2								
Lane LOS	A	A	C	C								
Approach Delay (s/veh)	1.2	0.3	21.0	22.2								
Approach LOS			C	C								
Intersection Summary												
Average Delay			5.8									
Intersection Capacity Utilization			45.0%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
BG (2028) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	13	267	0	0	318	20	2	1	0	32	0	48
Future Volume (Veh/h)	13	267	0	0	318	20	2	1	0	32	0	48
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Hourly flow rate (vph)	14	290	0	0	374	24	4	2	0	40	0	60
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	408			300			774	736	300	715	724	396
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	408			300			774	736	300	715	724	396
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	99			100			99	99	100	88	100	91
cM capacity (veh/h)	1140			1249			277	336	732	333	341	647
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	304	398	6	100								
Volume Left	14	0	4	40								
Volume Right	0	24	0	60								
cSH	1140	1249	294	469								
Volume to Capacity	0.01	0.00	0.02	0.21								
Queue Length 95th (m)	0.3	0.0	0.5	6.1								
Control Delay (s/veh)	0.5	0.0	17.5	14.7								
Lane LOS	A		C	B								
Approach Delay (s/veh)	0.5	0.0	17.5	14.7								
Approach LOS			C	B								
Intersection Summary												
Average Delay			2.1									
Intersection Capacity Utilization			36.2%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
BG (2028) - PM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	0	0	0	691	647	0
Future Volume (Veh/h)	0	0	0	691	647	0
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.93	0.93
Hourly flow rate (vph)	0	0	0	794	696	0
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1500	706	706			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1500	706	706			
tC, single (s)	6.4	6.2	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	100	100	100			
cM capacity (veh/h)	133	432	883			
Direction, Lane #	EB 1	NB 1	SB 1			
Volume Total	0	794	696			
Volume Left	0	0	0			
Volume Right	0	0	0			
cSH	1700	883	1700			
Volume to Capacity	0.00	0.00	0.41			
Queue Length 95th (m)	0.0	0.0	0.0			
Control Delay (s/veh)	0.0	0.0	0.0			
Lane LOS	A					
Approach Delay (s/veh)	0.0	0.0	0.0			
Approach LOS	A					
Intersection Summary						
Average Delay		0.0				
Intersection Capacity Utilization		46.4%		ICU Level of Service		A
Analysis Period (min)		15				

Intersection Sign configuration not allowed in HCM analysis.

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2033) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	164	177	88	133	124	71	394	98	106	428	138
Future Volume (vph)	164	177	88	133	124	71	394	98	106	428	138
Lane Group Flow (vph)	184	244	106	160	149	82	453	113	151	611	197
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.52	0.46	0.57	0.51	0.39	0.21	0.33	0.17	0.30	0.42	0.26
Control Delay (s/veh)	25.2	23.3	41.4	34.2	8.2	10.6	17.5	2.7	11.3	18.0	3.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	25.2	23.3	41.4	34.2	8.2	10.6	17.5	2.7	11.3	18.0	3.8
Queue Length 50th (m)	19.5	26.5	14.1	21.1	0.0	5.0	22.8	0.0	9.6	32.4	0.0
Queue Length 95th (m)	33.6	44.5	26.0	34.2	10.8	12.7	37.2	5.7	16.4	38.7	4.8
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	351	1094	539	920	820	395	1377	684	509	1457	766
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.52	0.22	0.20	0.17	0.18	0.21	0.33	0.17	0.30	0.42	0.26

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 75.9

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
9.5 s	37 s	53.5 s
 Ø5	 Ø6	 Ø7
9.5 s	37 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

BG (2033) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	164	177	40	88	133	124	71	394	98	106	428	138
Future Volume (vph)	164	177	40	88	133	124	71	394	98	106	428	138
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1774		1730	1883	1527	1612	3476	1518	1784	3444	1548
Flt Permitted	0.49	1.00		0.61	1.00	1.00	0.40	1.00	1.00	0.47	1.00	1.00
Satd. Flow (perm)	903	1774		1106	1883	1527	676	3476	1518	889	3444	1548
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	184	199	45	106	160	149	82	453	113	151	611	197
RTOR Reduction (vph)	0	11	0	0	0	124	0	0	67	0	0	115
Lane Group Flow (vph)	184	233	0	106	160	25	82	453	46	151	611	82
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	22.3	22.3		12.8	12.8	12.8	34.9	31.0	31.0	37.1	32.1	32.1
Effective Green, g (s)	22.3	22.3		12.8	12.8	12.8	34.9	31.0	31.0	37.1	32.1	32.1
Actuated g/C Ratio	0.29	0.29		0.17	0.17	0.17	0.45	0.40	0.40	0.48	0.42	0.42
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	318	515		184	313	254	354	1403	612	487	1439	647
v/s Ratio Prot	c0.04	0.13			0.08		0.01	0.13		c0.02	c0.18	
v/s Ratio Perm	c0.13			0.10		0.02	0.09		0.03	0.13		0.05
v/c Ratio	0.58	0.45		0.58	0.51	0.10	0.23	0.32	0.07	0.31	0.42	0.13
Uniform Delay, d1	22.6	22.3		29.5	29.2	27.1	12.1	15.7	14.1	11.2	15.8	13.7
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	2.5	0.6		4.3	1.4	0.2	0.3	0.6	0.2	0.4	0.9	0.4
Delay (s)	25.1	22.9		33.8	30.6	27.3	12.4	16.3	14.3	11.6	16.7	14.1
Level of Service	C	C		C	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		23.9			30.2			15.5			15.4	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			19.4									
HCM 2000 Volume to Capacity ratio			0.51									
Actuated Cycle Length (s)			76.8									
Intersection Capacity Utilization			74.3%									
Analysis Period (min)			15									
c Critical Lane Group												

05/15/2025

JL

Synchro 12 Report

Page 2

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
BG (2033) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	42	295	12	4	143	16	10	24	15	33	66	25
Future Volume (Veh/h)	42	295	12	4	143	16	10	24	15	33	66	25
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	52	369	15	5	193	22	16	38	23	39	78	29
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None				None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	225			394			783	726	397	757	722	224
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	225			394			783	726	397	757	722	224
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	96			100			93	88	96	85	76	96
cM capacity (veh/h)	1280			1153			229	311	625	262	327	771
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	436	220	77	146								
Volume Left	52	5	16	39								
Volume Right	15	22	23	29								
cSH	1280	1153	337	344								
Volume to Capacity	0.04	0.00	0.23	0.42								
Queue Length 95th (m)	1.0	0.1	6.6	15.5								
Control Delay (s/veh)	1.3	0.2	18.8	23.0								
Lane LOS	A	A	C	C								
Approach Delay (s/veh)	1.3	0.2	18.8	23.0								
Approach LOS			C	C								
Intersection Summary												
Average Delay			6.2									
Intersection Capacity Utilization			49.9%	ICU Level of Service					A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
BG (2033) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	22	310	1	1	161	28	0	0	0	21	0	12
Future Volume (Veh/h)	22	310	1	1	161	28	0	0	0	21	0	12
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Hourly flow rate (vph)	29	408	1	1	237	41	0	0	0	28	0	16
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	288			419			752	767	419	736	747	268
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	288			419			752	767	419	736	747	268
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.4	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.8	4.0	3.3
p0 queue free %	98			100			100	100	100	90	100	98
cM capacity (veh/h)	1261			1129			306	318	628	286	327	764
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	438	279	0	44								
Volume Left	29	1	0	28								
Volume Right	1	41	0	16								
cSH	1261	1129	1700	370								
Volume to Capacity	0.02	0.00	0.00	0.12								
Queue Length 95th (m)	0.5	0.0	0.0	3.0								
Control Delay (s/veh)	0.7	0.0	0.0	16.0								
Lane LOS	A	A	A	C								
Approach Delay (s/veh)	0.7	0.0	0.0	16.0								
Approach LOS			A	C								
Intersection Summary												
Average Delay			1.4									
Intersection Capacity Utilization			42.1%		ICU Level of Service				A			
Analysis Period (min)			15									

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2033) - PM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	186	218	99	191	218	89	557	116	265	557	217
Future Volume (vph)	186	218	99	191	218	89	557	116	265	557	217
Lane Group Flow (vph)	204	304	130	251	287	102	640	133	285	599	233
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.64	0.51	0.59	0.65	0.58	0.26	0.47	0.20	0.75	0.42	0.31
Control Delay (s/veh)	29.1	23.3	39.5	36.9	12.3	12.8	21.0	4.1	29.9	19.8	4.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	29.1	23.3	39.5	36.9	12.3	12.8	21.0	4.1	29.9	19.8	4.1
Queue Length 50th (m)	21.9	34.3	17.8	34.9	8.3	7.2	37.6	0.0	22.6	34.8	0.0
Queue Length 95th (m)	37.1	55.6	27.9	46.1	17.5	16.9	57.5	9.1	#61.4	56.1	14.3
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	319	1064	502	878	849	389	1353	671	380	1418	761
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.29	0.26	0.29	0.34	0.26	0.47	0.20	0.75	0.42	0.31

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 79.6

Natural Cycle: 100

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: CR 93 & CR 25/Yonge St

	Ø1		Ø2		Ø4
9.5 s		37 s		53.5 s	
	Ø5		Ø6		Ø7
9.5 s		37 s		9.5 s	44 s

HCM Signalized Intersection Capacity Analysis
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2033) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	186	218	58	99	191	218	89	557	116	265	557	217
Future Volume (vph)	186	218	58	99	191	218	89	557	116	265	557	217
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1787	1806		1782	1883	1571	1671	3579	1547	1786	3510	1547
Flt Permitted	0.38	1.00		0.57	1.00	1.00	0.40	1.00	1.00	0.34	1.00	1.00
Satd. Flow (perm)	707	1806		1078	1883	1571	697	3579	1547	638	3510	1547
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	204	240	64	130	251	287	102	640	133	285	599	233
RTOR Reduction (vph)	0	12	0	0	0	176	0	0	82	0	0	140
Lane Group Flow (vph)	204	292	0	130	251	111	102	640	51	285	599	93
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	25.9	25.9		16.4	16.4	16.4	35.0	31.1	31.1	37.2	32.2	32.2
Effective Green, g (s)	25.9	25.9		16.4	16.4	16.4	35.0	31.1	31.1	37.2	32.2	32.2
Actuated g/C Ratio	0.32	0.32		0.20	0.20	0.20	0.43	0.39	0.39	0.46	0.40	0.40
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	294	581		219	383	320	350	1382	597	366	1404	618
v/s Ratio Prot	c0.04	0.16			0.13		0.01	0.18		c0.05	0.17	
v/s Ratio Perm	c0.18			0.12		0.07	0.11		0.03	c0.31		0.06
v/c Ratio	0.69	0.50		0.59	0.66	0.35	0.29	0.46	0.09	0.78	0.43	0.15
Uniform Delay, d1	23.4	22.1		29.0	29.5	27.5	13.7	18.5	15.7	16.7	17.5	15.4
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	6.9	0.7		4.3	4.0	0.7	0.5	1.1	0.3	10.0	1.0	0.5
Delay (s)	30.3	22.8		33.3	33.5	28.1	14.2	19.6	16.0	26.7	18.4	15.9
Level of Service	C	C		C	C	C	B	B	B	C	B	B
Approach Delay (s/veh)		25.8			31.1			18.4			20.0	
Approach LOS		C			C			B			C	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			22.8				HCM 2000 Level of Service			C		
HCM 2000 Volume to Capacity ratio			0.80									
Actuated Cycle Length (s)			80.5				Sum of lost time (s)			23.0		
Intersection Capacity Utilization			86.1%				ICU Level of Service			E		
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
BG (2033) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	28	242	5	10	346	42	8	72	18	27	50	43
Future Volume (Veh/h)	28	242	5	10	346	42	8	72	18	27	50	43
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	33	288	6	12	402	49	9	82	20	32	59	51
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	461			304			908	852	311	889	831	447
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	461			304			908	852	311	889	831	447
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	97			99			95	71	97	83	79	91
cM capacity (veh/h)	1059			1245			184	279	715	186	282	588
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	327	463	111	142								
Volume Left	33	12	9	32								
Volume Right	6	49	20	51								
cSH	1059	1245	300	304								
Volume to Capacity	0.03	0.01	0.37	0.47								
Queue Length 95th (m)	0.7	0.2	12.5	17.9								
Control Delay (s/veh)	1.1	0.3	23.9	26.9								
Lane LOS	A	A	C	D								
Approach Delay (s/veh)	1.1	0.3	23.9	26.9								
Approach LOS			C	D								
Intersection Summary												
Average Delay			6.7									
Intersection Capacity Utilization			47.5%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
BG (2033) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	13	295	0	0	350	20	2	1	0	32	0	48
Future Volume (Veh/h)	13	295	0	0	350	20	2	1	0	32	0	48
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Hourly flow rate (vph)	14	321	0	0	412	24	4	2	0	40	0	60
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	446			331			843	805	331	784	793	434
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	446			331			843	805	331	784	793	434
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	99			100			98	99	100	87	100	90
cM capacity (veh/h)	1103			1216			247	306	704	299	311	616
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	335	436	6	100								
Volume Left	14	0	4	40								
Volume Right	0	24	0	60								
cSH	1103	1216	264	432								
Volume to Capacity	0.01	0.00	0.02	0.23								
Queue Length 95th (m)	0.3	0.0	0.5	6.7								
Control Delay (s/veh)	0.5	0.0	18.9	15.8								
Lane LOS	A		C	C								
Approach Delay (s/veh)	0.5	0.0	18.9	15.8								
Approach LOS			C	C								
Intersection Summary												
Average Delay			2.1									
Intersection Capacity Utilization			37.6%		ICU Level of Service				A			
Analysis Period (min)			15									

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2038) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	179	195	98	145	137	78	435	108	117	472	149
Future Volume (vph)	179	195	98	145	137	78	435	108	117	472	149
Lane Group Flow (vph)	201	268	118	175	165	90	500	124	167	674	213
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.56	0.49	0.61	0.52	0.40	0.25	0.37	0.18	0.35	0.47	0.28
Control Delay (s/veh)	25.8	23.6	42.5	33.8	7.7	11.7	18.5	3.4	12.7	19.2	3.9
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	25.8	23.6	42.5	33.8	7.7	11.7	18.5	3.4	12.7	19.2	3.9
Queue Length 50th (m)	21.5	29.7	16.0	23.2	0.0	5.8	26.3	0.0	11.1	37.6	0.0
Queue Length 95th (m)	36.2	48.8	28.6	36.8	11.0	14.4	42.6	7.5	18.8	44.5	4.9
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	360	1080	520	907	819	359	1358	677	473	1437	767
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.56	0.25	0.23	0.19	0.20	0.25	0.37	0.18	0.35	0.47	0.28

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 77.1

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

	Ø1		Ø2		Ø4
9.5 s		37 s		53.5 s	
	Ø5		Ø6		Ø7
9.5 s		37 s		9.5 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

BG (2038) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	179	195	44	98	145	137	78	435	108	117	472	149
Future Volume (vph)	179	195	44	98	145	137	78	435	108	117	472	149
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1775		1731	1883	1527	1613	3476	1518	1785	3444	1548
Flt Permitted	0.49	1.00		0.59	1.00	1.00	0.36	1.00	1.00	0.44	1.00	1.00
Satd. Flow (perm)	909	1775		1082	1883	1527	603	3476	1518	822	3444	1548
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	201	219	49	118	175	165	90	500	124	167	674	213
RTOR Reduction (vph)	0	11	0	0	0	136	0	0	75	0	0	125
Lane Group Flow (vph)	201	258	0	118	175	29	90	500	49	167	674	88
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	23.4	23.4		13.9	13.9	13.9	35.0	31.1	31.1	37.2	32.2	32.2
Effective Green, g (s)	23.4	23.4		13.9	13.9	13.9	35.0	31.1	31.1	37.2	32.2	32.2
Actuated g/C Ratio	0.30	0.30		0.18	0.18	0.18	0.45	0.40	0.40	0.48	0.41	0.41
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	327	532		192	335	272	321	1385	605	453	1421	639
v/s Ratio Prot	c0.04	0.15			0.09		0.01	0.14		c0.02	c0.20	
v/s Ratio Perm	c0.14			0.11		0.02	0.11		0.03	0.15		0.06
v/c Ratio	0.61	0.48		0.61	0.52	0.11	0.28	0.36	0.08	0.37	0.47	0.14
Uniform Delay, d1	22.9	22.4		29.6	29.0	26.9	12.6	16.5	14.6	11.8	16.7	14.3
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	3.4	0.7		5.7	1.5	0.2	0.5	0.7	0.3	0.5	1.1	0.4
Delay (s)	26.3	23.1		35.3	30.5	27.0	13.1	17.2	14.8	12.3	17.9	14.7
Level of Service	C	C		D	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		24.5			30.5			16.3			16.3	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			20.1									
HCM 2000 Volume to Capacity ratio			0.56									
Actuated Cycle Length (s)			78.0									
Intersection Capacity Utilization			76.3%									
Analysis Period (min)			15									
c Critical Lane Group												

05/15/2025

JL

Synchro 12 Report

Page 2

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
BG (2038) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	44	325	13	5	158	17	11	25	17	36	69	28
Future Volume (Veh/h)	44	325	13	5	158	17	11	25	17	36	69	28
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	55	406	16	7	214	23	17	39	27	42	81	33
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	247			432			857	795	434	830	792	246
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	247			432			857	795	434	830	792	246
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	96			99			91	86	95	82	73	96
cM capacity (veh/h)	1256			1117			195	282	596	228	297	750
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	477	244	83	156								
Volume Left	55	7	17	42								
Volume Right	16	23	27	33								
cSH	1256	1117	306	311								
Volume to Capacity	0.04	0.01	0.27	0.50								
Queue Length 95th (m)	1.0	0.1	8.2	20.2								
Control Delay (s/veh)	1.3	0.3	21.1	27.7								
Lane LOS	A	A	C	D								
Approach Delay (s/veh)	1.3	0.3	21.1	27.7								
Approach LOS			C	D								
Intersection Summary												
Average Delay			7.1									
Intersection Capacity Utilization			52.8%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
BG (2038) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	22	341	1	1	177	28	0	0	0	21	0	12
Future Volume (Veh/h)	22	341	1	1	177	28	0	0	0	21	0	12
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Hourly flow rate (vph)	29	449	1	1	260	41	0	0	0	28	0	16
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	311			460			816	831	460	800	811	291
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	311			460			816	831	460	800	811	291
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.4	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.8	4.0	3.3
p0 queue free %	98			100			100	100	100	89	100	98
cM capacity (veh/h)	1237			1090			277	292	596	258	300	741
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	479	302	0	44								
Volume Left	29	1	0	28								
Volume Right	1	41	0	16								
cSH	1237	1090	1700	338								
Volume to Capacity	0.02	0.00	0.00	0.13								
Queue Length 95th (m)	0.5	0.0	0.0	3.4								
Control Delay (s/veh)	0.7	0.0	0.0	17.2								
Lane LOS	A	A	A	C								
Approach Delay (s/veh)	0.7	0.0	0.0	17.2								
Approach LOS			A	C								
Intersection Summary												
Average Delay			1.4									
Intersection Capacity Utilization			43.9%		ICU Level of Service					A		
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
BG (2038) - AM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	0	0	0	621	614	0
Future Volume (Veh/h)	0	0	0	621	614	0
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.70	0.70
Hourly flow rate (vph)	0	0	0	714	877	0
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1601	887	887			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1601	887	887			
tC, single (s)	6.4	6.2	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	100	100	100			
cM capacity (veh/h)	115	340	756			
Direction, Lane #	EB 1	NB 1	SB 1			
Volume Total	0	714	877			
Volume Left	0	0	0			
Volume Right	0	0	0			
cSH	1700	756	1700			
Volume to Capacity	0.00	0.00	0.52			
Queue Length 95th (m)	0.0	0.0	0.0			
Control Delay (s/veh)	0.0	0.0	0.0			
Lane LOS	A					
Approach Delay (s/veh)	0.0	0.0	0.0			
Approach LOS	A					
Intersection Summary						
Average Delay			0.0			
Intersection Capacity Utilization			42.7%	ICU Level of Service		A
Analysis Period (min)			15			

Intersection Sign configuration not allowed in HCM analysis.

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
BG (2038) - PM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	202	238	110	210	240	98	615	128	293	615	237
Future Volume (vph)	202	238	110	210	240	98	615	128	293	615	237
Lane Group Flow (vph)	222	330	145	276	316	113	707	147	315	661	255
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	11.0	55.0	44.0	44.0	44.0	16.5	37.0	37.0	18.0	38.5	38.5
Total Split (%)	10.0%	50.0%	40.0%	40.0%	40.0%	15.0%	33.6%	33.6%	16.4%	35.0%	35.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.73	0.54	0.65	0.69	0.54	0.29	0.61	0.25	0.74	0.50	0.35
Control Delay (s/veh)	38.0	27.4	47.1	42.9	7.2	14.4	30.3	5.8	25.9	25.5	4.8
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	38.0	27.4	47.1	42.9	7.2	14.4	30.3	5.8	25.9	25.5	4.8
Queue Length 50th (m)	28.7	45.4	23.8	45.8	0.0	9.2	55.2	0.0	29.0	46.5	0.0
Queue Length 95th (m)	45.7	69.5	34.7	57.2	8.2	20.8	81.7	12.6	#74.7	77.8	17.0
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	303	942	419	751	815	446	1158	597	428	1319	737
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.73	0.35	0.35	0.37	0.39	0.25	0.61	0.25	0.74	0.50	0.35

Intersection Summary

Cycle Length: 110

Actuated Cycle Length: 93.1

Natural Cycle: 100

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: CR 93 & CR 25/Yonge St

	Ø1		Ø2		Ø4
18 s		37 s		55 s	
	Ø5		Ø6		Ø7
16.5 s		38.5 s		11 s	Ø8
					44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

BG (2038) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	202	238	62	110	210	240	98	615	128	293	615	237
Future Volume (vph)	202	238	62	110	210	240	98	615	128	293	615	237
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	1.00		1.00	1.00	0.98	1.00	1.00	0.96	1.00	1.00	0.96
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.97		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1787	1807		1781	1883	1570	1671	3579	1544	1788	3510	1544
Flt Permitted	0.33	1.00		0.56	1.00	1.00	0.37	1.00	1.00	0.23	1.00	1.00
Satd. Flow (perm)	620	1807		1052	1883	1570	657	3579	1544	431	3510	1544
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	222	262	68	145	276	316	113	707	147	315	661	255
RTOR Reduction (vph)	0	10	0	0	0	248	0	0	99	0	0	159
Lane Group Flow (vph)	222	320	0	145	276	68	113	707	48	315	661	96
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	30.9	30.9		19.9	19.9	19.9	38.8	30.1	30.1	48.2	35.0	35.0
Effective Green, g (s)	30.9	30.9		19.9	19.9	19.9	38.8	30.1	30.1	48.2	35.0	35.0
Actuated g/C Ratio	0.33	0.33		0.21	0.21	0.21	0.42	0.32	0.32	0.52	0.38	0.38
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	287	599		224	402	335	368	1157	499	421	1319	580
v/s Ratio Prot	c0.05	0.18			0.15		0.03	0.20		c0.11	0.19	
v/s Ratio Perm	c0.20			0.14		0.04	0.10		0.03	c0.28		0.06
v/c Ratio	0.77	0.53		0.65	0.69	0.20	0.31	0.61	0.10	0.75	0.50	0.17
Uniform Delay, d1	27.0	25.3		33.4	33.7	30.1	17.0	26.6	22.0	15.0	22.3	19.3
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	12.2	0.9		6.3	4.8	0.3	0.5	2.4	0.4	7.1	1.4	0.6
Delay (s)	39.2	26.2		39.7	38.5	30.4	17.5	29.0	22.4	22.1	23.7	19.9
Level of Service	D	C		D	D	C	B	C	C	C	C	B
Approach Delay (s/veh)		31.4			35.3			26.6			22.5	
Approach LOS		C			D			C			C	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			27.8									
HCM 2000 Volume to Capacity ratio			0.82									
Actuated Cycle Length (s)			93.1									
Intersection Capacity Utilization			89.1%									
Analysis Period (min)			15									
c Critical Lane Group												

05/15/2025

JL

Synchro 12 Report

Page 2

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
BG (2038) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	30	267	6	10	382	44	9	76	20	29	53	48
Future Volume (Veh/h)	30	267	6	10	382	44	9	76	20	29	53	48
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	36	318	7	12	444	51	10	86	23	34	62	56
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	505			335			994	933	342	973	911	490
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	505			335			994	933	342	973	911	490
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	96			99			93	66	97	78	75	90
cM capacity (veh/h)	1019			1212			153	249	687	153	252	556
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	361	507	119	152								
Volume Left	36	12	10	34								
Volume Right	7	51	23	56								
cSH	1019	1212	268	267								
Volume to Capacity	0.04	0.01	0.44	0.57								
Queue Length 95th (m)	0.8	0.2	16.3	24.5								
Control Delay (s/veh)	1.2	0.3	28.7	34.8								
Lane LOS	A	A	D	D								
Approach Delay (s/veh)	1.2	0.3	28.7	34.8								
Approach LOS			D	D								
Intersection Summary												
Average Delay			8.2									
Intersection Capacity Utilization			50.9%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
BG (2038) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	13	325	0	0	386	20	2	1	0	32	0	48
Future Volume (Veh/h)	13	325	0	0	386	20	2	1	0	32	0	48
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Hourly flow rate (vph)	14	353	0	0	454	24	4	2	0	40	0	60
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	488			363			917	879	363	858	867	476
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	488			363			917	879	363	858	867	476
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	99			100			98	99	100	85	100	90
cM capacity (veh/h)	1065			1184			219	277	675	266	281	583
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	367	478	6	100								
Volume Left	14	0	4	40								
Volume Right	0	24	0	60								
cSH	1065	1184	235	395								
Volume to Capacity	0.01	0.00	0.03	0.25								
Queue Length 95th (m)	0.3	0.0	0.6	7.5								
Control Delay (s/veh)	0.5	0.0	20.7	17.2								
Lane LOS	A		C	C								
Approach Delay (s/veh)	0.5	0.0	20.7	17.2								
Approach LOS			C	C								
Intersection Summary												
Average Delay			2.1									
Intersection Capacity Utilization			39.2%		ICU Level of Service				A			
Analysis Period (min)			15									

Appendix F – Transportation Tomorrow Survey Excerpts

2006 GTA Zone of Origin:

8577

Outside Midland			Route Selection						Distribution						Total
Planning District of Destination	Trips	%	N (CR 93)	S (CR 93)	E (Yonge)	W (CR 25)	N (Wilson)	S (Marshall)	N (CR 93)	S (CR 93)	E (Yonge)	W (CR 25)	N (Wilson)	S (Marshall)	
Innisfil	128	17%		85%		10%		5%	0%	14%	0%	2%	0%	1%	17%
Essa	60	8%		10%		90%			0%	1%	0%	7%	0%	0%	8%
Springwater	75	10%		75%		20%		5%	0%	7%	0%	2%	0%	0%	9%
Wasaga Beach	38	5%				100%			0%	0%	0%	5%	0%	0%	5%
Tiny	41	5%	10%			60%	30%		1%	0%	0%	3%	2%	0%	6%
Penetanguishene	71	9%	90%				10%		8%	0%	0%	0%	1%	0%	9%
Midland	232								0%	0%	0%	0%	0%	0%	0%
Oro-Medonte	128	17%		100%					0%	16%	0%	0%	0%	0%	16%
Sub-Total	541	70%							9%	38%	0%	19%	3%	1%	70%
Within Midland			Route Selection						Distribution						Total
2006 GTA zone of Destination	Trips	%	N (CR 93)	S (CR 93)	E (Yonge)	W (CR 25)	N (Wilson)	S (Marshall)	N (CR 93)	S (CR 93)	E (Yonge)	W (CR 25)	N (Wilson)	S (Marshall)	
8577	85	11%	10%		90%				1%	0%	10%	0%	0%	0%	11%
8578	148	19%	30%		70%				6%	0%	13%	0%	0%	0%	19%
	233	30%							7%	0%	23%	0%	0%	0%	30%
Totals	774	100%							16%	38%	23%	19%	3%	1%	100%



TTS Cross Tabulation

Cross Tabulation Query Form - Trip - 2022

Filter Variables

2006 GTA zone of origin

Planning district of desti...

(Optional) Table Attribute

Group Attributes

Row Grouping

Column Grouping

Table Grouping

Grouping file: [Choose File](#) No file chosen

Filter Selection +

☒ 2006 GTA zone of origin

In

8577

And

☒ 2022 Trip purpose of destination

In

10, 11,

And

☒ Start time of trip

In

0700-0900

[Add](#) [Delete](#)

Output

☒ Comma-delimited table

☐ Column format

[Expansion Factor On](#)

[Click to Select Load](#)

[Load](#)

[Execute Query](#)

[Select All](#)

[Save As](#)

Fri May 02 2025 12:51:46 GMT-0400 (Eastern Daylight Time) - Run Time: 3202ms

Cross Tabulation Query Form - Trip - 2022

Row: 2006 GTA zone of origin - gta06_orig

Column: Planning district of destination - pd_dest

Filters:

(2006 GTA zone of origin - gta06_orig In 8577

and

2022 Trip purpose of destination - purp_dest2022 In 10, 11,

and

Start time of trip - start_time In 0700-0900)

Trip 2022

Table:

,Innisfil,Essa,Springwater,Wasaga Beach,Tiny,Penetanguishene,Midland,Oro-Medonte
8577,128,60,75,38,41,71,232,128



TTS Cross Tabulation

Cross Tabulation Query Form - Trip - 2022

Filter Variables

2006 GTA zone of origin

2006 GTA zone of desti...

(Optional) Table Attribute

Group Attributes

Row Grouping

Column Grouping

Table Grouping

Grouping file: [Choose File](#) No file chosen

Filter Selection +

☒ 2006 GTA zone of origin

In

8577

And

☒ 2022 Trip purpose of destination

In

10, 11,

And

☒ Start time of trip

In

0700-0900

And

☒ Planning district of destination

In

131,

[Add](#) [Delete](#)

Output

☒ Comma-delimited table

☐ Column format

[Expansion Factor On](#)

[Click to Select Load](#)

[Load](#)

[Execute Query](#)

[Select All](#)

[Save As](#)

Fri May 02 2025 12:59:21 GMT-0400 (Eastern Daylight Time) - Run Time: 4040ms

Cross Tabulation Query Form - Trip - 2022

Row: 2006 GTA zone of origin - gta06_orig

Column: 2006 GTA zone of destination - gta06_dest

Filters:

(2006 GTA zone of origin - gta06_orig In 8577

and

2022 Trip purpose of destination - purp_dest2022 In 10, 11,

and

Start time of trip - start_time In 0700-0900

and

Planning district of destination - pd_dest In 131,)

Trip 2022

Table:

,8577,8578

8577,85,148

Appendix G – Synchro Analysis Output – Total Traffic Volumes

Queues
3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2028) - AM (sig improv)

								
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations								
Traffic Volume (vph)	22	292	84	158	54	0	21	0
Future Volume (vph)	22	292	84	158	54	0	21	0
Lane Group Flow (vph)	29	418	124	273	0	268	0	44
Turn Type	Perm	NA	pm+pt	NA	Perm	NA	Perm	NA
Protected Phases		4	3	8		2		6
Permitted Phases	4		8		2		6	
Detector Phase	4	4	3	8	2	2	6	6
Switch Phase								
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	23.0	23.0	9.5	23.0	27.0	27.0	27.0	27.0
Total Split (s)	23.0	23.0	9.5	32.5	27.5	27.5	27.5	27.5
Total Split (%)	38.3%	38.3%	15.8%	54.2%	45.8%	45.8%	45.8%	45.8%
Yellow Time (s)	3.0	3.0	2.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	1.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0		0.0		0.0
Total Lost Time (s)	5.0	5.0	3.0	5.0		5.0		5.0
Lead/Lag	Lag	Lag	Lead					
Lead-Lag Optimize?	Yes	Yes	Yes					
Recall Mode	None	None	None	None	Max	Max	Max	Max
v/c Ratio	0.09	0.79	0.35	0.37		0.35		0.08
Control Delay (s/veh)	16.2	31.4	11.4	11.6		5.5		1.2
Queue Delay	0.0	0.0	0.0	0.0		0.0		0.0
Total Delay (s/veh)	16.2	31.4	11.4	11.6		5.5		1.2
Queue Length 50th (m)	2.3	40.1	6.9	16.5		4.2		0.0
Queue Length 95th (m)	6.1	53.4	10.4	21.0		16.4		0.4
Internal Link Dist (m)		136.3		736.8		127.6		42.7
Turn Bay Length (m)	15.0		30.0					
Base Capacity (vph)	358	611	355	884		761		535
Starvation Cap Reductn	0	0	0	0		0		0
Spillback Cap Reductn	0	0	0	0		0		0
Storage Cap Reductn	0	0	0	0		0		0
Reduced v/c Ratio	0.08	0.68	0.35	0.31		0.35		0.08

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 56.1

Natural Cycle: 60

Control Type: Semi Act-Uncoord

Splits and Phases: 3: West Access/Sundowner Rd & CR 25

 Ø2	 Ø3	 Ø4
27.5 s	9.5 s	23 s
 Ø6	 Ø8	
27.5 s	32.5 s	

HCM Signalized Intersection Capacity Analysis

3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd

Total (2028) - AM (sig improv)

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	22	292	26	84	158	28	54	0	182	21	0	12
Future Volume (vph)	22	292	26	84	158	28	54	0	182	21	0	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.0	5.0		3.0	5.0			5.0			5.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frpb, ped/bikes	1.00	1.00		1.00	0.99			1.00			1.00	
Flpb, ped/bikes	0.99	1.00		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.98			0.90			0.95	
Flt Protected	0.95	1.00		0.95	1.00			0.99			0.97	
Satd. Flow (prot)	1769	1855		1787	1755			1668			1454	
Flt Permitted	0.59	1.00		0.23	1.00			0.93			0.79	
Satd. Flow (perm)	1101	1855		441	1755			1566			1181	
Peak-hour factor, PHF	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Adj. Flow (vph)	29	384	34	124	232	41	61	0	207	28	0	16
RTOR Reduction (vph)	0	6	0	0	12	0	0	123	0	0	26	0
Lane Group Flow (vph)	29	412	0	124	261	0	0	145	0	0	18	0
Confl. Peds. (#/hr)	10		10	10		10						
Heavy Vehicles (%)	2%	2%	2%	2%	4%	20%	2%	2%	2%	33%	2%	2%
Turn Type	Perm	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases		4		3	8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	15.9	15.9		23.8	23.8			22.9			22.9	
Effective Green, g (s)	15.9	15.9		23.8	23.8			22.9			22.9	
Actuated g/C Ratio	0.28	0.28		0.42	0.42			0.40			0.40	
Clearance Time (s)	5.0	5.0		3.0	5.0			5.0			5.0	
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Lane Grp Cap (vph)	308	520		301	736			632			476	
v/s Ratio Prot		c0.22		c0.04	0.15							
v/s Ratio Perm	0.03			0.14				c0.09			0.02	
v/c Ratio	0.09	0.79		0.41	0.36			0.23			0.04	
Uniform Delay, d1	15.1	18.9		11.3	11.2			11.1			10.2	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	0.1	8.1		0.9	0.3			0.8			0.1	
Delay (s)	15.2	27.0		12.3	11.5			11.9			10.4	
Level of Service	B	C		B	B			B			B	
Approach Delay (s/veh)		26.2			11.7			11.9			10.4	
Approach LOS		C			B			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			17.3									
HCM 2000 Volume to Capacity ratio			0.46									
Actuated Cycle Length (s)			56.7									
Intersection Capacity Utilization			47.5%									
Analysis Period (min)			15									
c Critical Lane Group												

07/17/2025

JL

Synchro 12 Report

Page 2

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2028) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	194	214	87	144	113	113	371	101	96	400	151
Future Volume (vph)	194	214	87	144	113	113	371	101	96	400	151
Lane Group Flow (vph)	218	391	105	173	136	130	426	116	137	571	216
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.60	0.72	0.61	0.51	0.35	0.33	0.31	0.17	0.27	0.42	0.29
Control Delay (s/veh)	27.4	29.3	43.9	33.6	7.2	12.8	17.9	3.0	11.6	19.2	4.0
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	27.4	29.3	43.9	33.6	7.2	12.8	17.9	3.0	11.6	19.2	4.0
Queue Length 50th (m)	23.6	44.8	14.2	22.9	0.0	8.5	21.7	0.0	8.9	30.7	0.0
Queue Length 95th (m)	39.2	72.0	26.3	36.5	9.5	19.7	36.4	6.3	15.8	37.7	4.9
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	361	1043	465	907	807	392	1357	677	514	1345	734
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.60	0.37	0.23	0.19	0.17	0.33	0.31	0.17	0.27	0.42	0.29

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 77.1

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

	Ø1		Ø2		Ø4
9.5 s		37 s		53.5 s	
	Ø5		Ø6		Ø7
9.5 s		37 s		9.5 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

Total (2028) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	194	214	134	87	144	113	113	371	101	96	400	151
Future Volume (vph)	194	214	134	87	144	113	113	371	101	96	400	151
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	0.99		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.94		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1697		1732	1883	1527	1612	3476	1518	1783	3444	1548
Flt Permitted	0.49	1.00		0.53	1.00	1.00	0.40	1.00	1.00	0.50	1.00	1.00
Satd. Flow (perm)	911	1697		968	1883	1527	683	3476	1518	945	3444	1548
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	218	240	151	105	173	136	130	426	116	137	571	216
RTOR Reduction (vph)	0	29	0	0	0	111	0	0	71	0	0	132
Lane Group Flow (vph)	218	362	0	105	173	25	130	426	45	137	571	84
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	23.4	23.4		13.9	13.9	13.9	35.1	30.1	30.1	35.1	30.1	30.1
Effective Green, g (s)	23.4	23.4		13.9	13.9	13.9	35.1	30.1	30.1	35.1	30.1	30.1
Actuated g/C Ratio	0.30	0.30		0.18	0.18	0.18	0.46	0.39	0.39	0.46	0.39	0.39
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	332	515		174	339	275	371	1358	593	485	1346	605
v/s Ratio Prot	0.04	c0.21			0.09		c0.02	0.12		0.02	c0.17	
v/s Ratio Perm	0.16			0.11		0.02	0.14		0.03	0.11		0.05
v/c Ratio	0.66	0.70		0.60	0.51	0.09	0.35	0.31	0.08	0.28	0.42	0.14
Uniform Delay, d1	22.9	23.7		29.0	28.5	26.3	12.4	16.3	14.7	12.3	17.1	15.1
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	4.6	4.3		5.8	1.3	0.1	0.6	0.6	0.3	0.3	1.0	0.5
Delay (s)	27.5	28.0		34.8	29.8	26.4	13.0	16.9	15.0	12.7	18.1	15.6
Level of Service	C	C		C	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		27.9			30.0			15.8			16.7	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			21.2									
HCM 2000 Volume to Capacity ratio			0.57									
Actuated Cycle Length (s)			77.0									
Intersection Capacity Utilization			80.3%									
Analysis Period (min)			15									
c Critical Lane Group												

07/17/2025

JL

Synchro 12 Report

Page 2

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Total (2028) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	40	295	11	9	181	25	9	23	16	37	62	23
Future Volume (Veh/h)	40	295	11	9	181	25	9	23	16	37	62	23
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	50	369	14	12	245	34	14	36	25	44	73	27
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	289			393			846	799	396	825	789	282
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	289			393			846	799	396	825	789	282
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	96			99			93	87	96	81	75	96
cM capacity (veh/h)	1211			1154			205	280	626	233	297	715
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	433	291	75	144								
Volume Left	50	12	14	44								
Volume Right	14	34	25	27								
cSH	1211	1154	317	305								
Volume to Capacity	0.04	0.01	0.24	0.47								
Queue Length 95th (m)	1.0	0.2	6.9	18.2								
Control Delay (s/veh)	1.3	0.4	19.9	27.0								
Lane LOS	A	A	C	D								
Approach Delay (s/veh)	1.3	0.4	19.9	27.0								
Approach LOS			C	D								
Intersection Summary												
Average Delay			6.4									
Intersection Capacity Utilization			50.6%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2028) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	22	292	26	84	158	28	54	0	182	21	0	12
Future Volume (Veh/h)	22	292	26	84	158	28	54	0	182	21	0	12
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Hourly flow rate (vph)	29	384	34	124	232	41	61	0	207	28	0	16
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	283			428			986	1000	411	1177	997	263
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	283			428			986	1000	411	1177	997	263
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.4	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.8	4.0	3.3
p0 queue free %	98			89			69	100	67	68	100	98
cM capacity (veh/h)	1267			1120			195	207	634	86	208	769
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	447	397	268	44								
Volume Left	29	124	61	28								
Volume Right	34	41	207	16								
cSH	1267	1120	419	127								
Volume to Capacity	0.02	0.11	0.64	0.35								
Queue Length 95th (m)	0.5	2.8	32.8	10.6								
Control Delay (s/veh)	0.7	3.5	27.6	47.4								
Lane LOS	A	A	D	E								
Approach Delay (s/veh)	0.7	3.5	27.6	47.4								
Approach LOS			D	E								
Intersection Summary												
Average Delay			9.7									
Intersection Capacity Utilization			57.2%		ICU Level of Service				B			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
Total (2028) - AM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	38	20	13	547	591	30
Future Volume (Veh/h)	38	20	13	547	591	30
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.70	0.70
Hourly flow rate (vph)	51	27	15	629	844	43
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1220	876	897			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1220	876	897			
tC, single (s)	6.8	6.9	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	70	91	98			
cM capacity (veh/h)	167	289	745			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	78	225	419	887		
Volume Left	51	15	0	0		
Volume Right	27	0	0	43		
cSH	196	745	1700	1700		
Volume to Capacity	0.40	0.02	0.25	0.52		
Queue Length 95th (m)	13.5	0.5	0.0	0.0		
Control Delay (s/veh)	35.0	0.9	0.0	0.0		
Lane LOS	E	A				
Approach Delay (s/veh)	35.0	0.3		0.0		
Approach LOS	E					
Intersection Summary						
Average Delay		1.8				
Intersection Capacity Utilization		43.0%		ICU Level of Service		A
Analysis Period (min)		15				

Intersection Sign configuration not allowed in HCM analysis.

Queues
3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2028) - PM (sig improv)

								
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations								
Traffic Volume (vph)	13	270	237	299	71	1	32	0
Future Volume (vph)	13	270	237	299	71	1	32	0
Lane Group Flow (vph)	14	366	279	376	0	428	0	100
Turn Type	Perm	NA	pm+pt	NA	Perm	NA	Perm	NA
Protected Phases		4	3	8		2		6
Permitted Phases	4		8		2		6	
Detector Phase	4	4	3	8	2	2	6	6
Switch Phase								
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	22.5	22.5	9.5	22.5	25.0	25.0	25.0	25.0
Total Split (s)	22.6	22.6	12.2	34.8	25.2	25.2	25.2	25.2
Total Split (%)	37.7%	37.7%	20.3%	58.0%	42.0%	42.0%	42.0%	42.0%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	1.0	1.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0		0.0		0.0
Total Lost Time (s)	5.0	5.0	4.0	4.0		5.0		5.0
Lead/Lag	Lag	Lag	Lead					
Lead-Lag Optimize?	Yes	Yes	Yes					
Recall Mode	Max	Max	None	Max	None	None	None	None
v/c Ratio	0.04	0.60	0.53	0.36		0.82		0.24
Control Delay (s/veh)	15.5	21.1	11.4	8.7		24.5		4.8
Queue Delay	0.0	0.0	0.0	0.0		0.0		0.0
Total Delay (s/veh)	15.5	21.1	11.4	8.7		24.5		4.8
Queue Length 50th (m)	1.0	29.2	13.4	18.5		22.1		0.0
Queue Length 95th (m)	4.6	#58.3	26.8	35.6		13.6		5.5
Internal Link Dist (m)		136.3		736.8		127.6		42.7
Turn Bay Length (m)	15.0		30.0					
Base Capacity (vph)	330	612	537	1054		651		541
Starvation Cap Reductn	0	0	0	0		0		0
Spillback Cap Reductn	0	0	0	0		0		0
Storage Cap Reductn	0	0	0	0		0		0
Reduced v/c Ratio	0.04	0.60	0.52	0.36		0.66		0.18

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 55

Natural Cycle: 60

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: West Access/Sundowner Rd & CR 25

 Ø2	 Ø3	 Ø4
25.2 s	12.2 s	22.6 s
 Ø6	 Ø8	
25.2 s	34.8 s	

HCM Signalized Intersection Capacity Analysis

3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd

Total (2028) - PM (sig improv)

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	13	270	67	237	299	20	71	1	142	32	0	48
Future Volume (vph)	13	270	67	237	299	20	71	1	142	32	0	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.0	5.0		4.0	4.0			5.0			5.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frpb, ped/bikes	1.00	0.99		1.00	1.00			1.00			1.00	
Flpb, ped/bikes	0.99	1.00		1.00	1.00			1.00			1.00	
Frt	1.00	0.97		1.00	0.99			0.91			0.92	
Flt Protected	0.95	1.00		0.95	1.00			0.98			0.98	
Satd. Flow (prot)	1772	1814		1785	1861			1687			1697	
Flt Permitted	0.54	1.00		0.35	1.00			0.85			0.74	
Satd. Flow (perm)	1004	1814		653	1861			1458			1276	
Peak-hour factor, PHF	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Adj. Flow (vph)	14	293	73	279	352	24	142	2	284	40	0	60
RTOR Reduction (vph)	0	14	0	0	3	0	0	130	0	0	73	0
Lane Group Flow (vph)	14	352	0	279	373	0	0	298	0	0	27	0
Confl. Peds. (#/hr)	10		10	10		10						
Turn Type	Perm	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases		4		3	8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	18.2	18.2		31.1	31.1			14.8			14.8	
Effective Green, g (s)	18.2	18.2		31.1	31.1			14.8			14.8	
Actuated g/C Ratio	0.33	0.33		0.57	0.57			0.27			0.27	
Clearance Time (s)	5.0	5.0		4.0	4.0			5.0			5.0	
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Lane Grp Cap (vph)	332	601		532	1054			393			343	
v/s Ratio Prot		0.19		c0.08	0.20							
v/s Ratio Perm	0.01			c0.22				c0.20			0.02	
v/c Ratio	0.04	0.59		0.52	0.35			0.76			0.08	
Uniform Delay, d1	12.4	15.2		7.0	6.5			18.4			15.0	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	0.2	4.1		0.9	0.9			8.2			0.1	
Delay (s)	12.7	19.4		7.9	7.4			26.6			15.1	
Level of Service	B	B		A	A			C			B	
Approach Delay (s/veh)		19.1			7.6			26.6			15.1	
Approach LOS		B			A			C			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			16.1			HCM 2000 Level of Service				B		
HCM 2000 Volume to Capacity ratio			0.66									
Actuated Cycle Length (s)			54.9			Sum of lost time (s)			14.0			
Intersection Capacity Utilization			58.7%			ICU Level of Service			B			
Analysis Period (min)			15									
c Critical Lane Group												

07/17/2025

JL

Synchro 12 Report

Page 2

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2028) - PM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	208	238	100	231	197	182	516	114	240	522	254
Future Volume (vph)	208	238	100	231	197	182	516	114	240	522	254
Lane Group Flow (vph)	229	397	132	304	259	209	593	131	258	561	273
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.76	0.63	0.57	0.69	0.48	0.56	0.45	0.20	0.67	0.44	0.37
Control Delay (s/veh)	36.7	24.7	37.9	37.4	8.9	21.3	22.3	4.2	26.3	22.1	4.5
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	36.7	24.7	37.9	37.4	8.9	21.3	22.3	4.2	26.3	22.1	4.5
Queue Length 50th (m)	25.0	46.4	18.3	43.7	4.7	17.2	36.4	0.0	21.7	34.2	0.0
Queue Length 95th (m)	#43.6	73.1	28.5	55.1	13.1	35.0	56.8	9.2	#52.3	56.2	16.2
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	303	1010	446	848	828	374	1306	653	384	1281	736
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.76	0.39	0.30	0.36	0.31	0.56	0.45	0.20	0.67	0.44	0.37

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 82.5

Natural Cycle: 100

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: CR 93 & CR 25/Yonge St

	Ø1		Ø2		Ø4
9.5 s		37 s		53.5 s	
	Ø5		Ø6		Ø7
9.5 s		37 s		9.5 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

Total (2028) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	208	238	123	100	231	197	182	516	114	240	522	254
Future Volume (vph)	208	238	123	100	231	197	182	516	114	240	522	254
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	0.99		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.95		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1787	1759		1782	1883	1571	1671	3579	1547	1786	3510	1547
Flt Permitted	0.33	1.00		0.53	1.00	1.00	0.39	1.00	1.00	0.37	1.00	1.00
Satd. Flow (perm)	613	1759		991	1883	1571	692	3579	1547	698	3510	1547
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	229	262	135	132	304	259	209	593	131	258	561	273
RTOR Reduction (vph)	0	23	0	0	0	169	0	0	83	0	0	173
Lane Group Flow (vph)	229	374	0	132	304	90	209	593	48	258	561	100
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	28.8	28.8		19.3	19.3	19.3	35.1	30.1	30.1	35.1	30.1	30.1
Effective Green, g (s)	28.8	28.8		19.3	19.3	19.3	35.1	30.1	30.1	35.1	30.1	30.1
Actuated g/C Ratio	0.35	0.35		0.23	0.23	0.23	0.43	0.37	0.37	0.43	0.37	0.37
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	285	614		232	441	367	354	1307	565	363	1282	565
v/s Ratio Prot	c0.05	0.21			0.16		0.04	0.17		c0.04	0.16	
v/s Ratio Perm	c0.23			0.13		0.06	0.22		0.03	c0.26		0.06
v/c Ratio	0.80	0.61		0.57	0.69	0.24	0.59	0.45	0.08	0.71	0.44	0.18
Uniform Delay, d1	24.2	22.2		27.9	28.8	25.6	16.5	19.9	17.1	17.8	19.8	17.7
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	15.0	1.7		3.2	4.5	0.3	2.6	1.1	0.3	6.4	1.1	0.7
Delay (s)	39.2	23.9		31.1	33.3	26.0	19.1	21.0	17.4	24.3	20.8	18.4
Level of Service	D	C		C	C	C	B	C	B	C	C	B
Approach Delay (s/veh)		29.5			30.1			20.1			21.0	
Approach LOS		C			C			C			C	
Intersection Summary												
HCM 2000 Control Delay (s/veh)		24.2										
HCM 2000 Volume to Capacity ratio		0.79										
Actuated Cycle Length (s)		82.4										
Intersection Capacity Utilization		88.4%										
Analysis Period (min)		15										
c Critical Lane Group												

07/17/2025

JL

Synchro 12 Report

Page 2

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Total (2028) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	27	272	5	12	352	49	8	69	22	37	48	39
Future Volume (Veh/h)	27	272	5	12	352	49	8	69	22	37	48	39
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	32	324	6	14	409	57	9	78	25	44	56	46
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	476			340			951	905	347	941	880	458
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	476			340			951	905	347	941	880	458
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	97			99			95	70	96	74	79	92
cM capacity (veh/h)	1045			1207			173	260	683	169	264	579
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	362	480	112	146								
Volume Left	32	14	9	44								
Volume Right	6	57	25	46								
cSH	1045	1207	288	264								
Volume to Capacity	0.03	0.01	0.39	0.55								
Queue Length 95th (m)	0.7	0.3	13.4	23.3								
Control Delay (s/veh)	1.1	0.4	25.3	34.2								
Lane LOS	A	A	D	D								
Approach Delay (s/veh)	1.1	0.4	25.3	34.2								
Approach LOS			D	D								
Intersection Summary												
Average Delay			7.6									
Intersection Capacity Utilization			47.8%		ICU Level of Service				A			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2028) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	13	270	67	237	299	20	71	1	142	32	0	48
Future Volume (Veh/h)	13	270	67	237	299	20	71	1	142	32	0	48
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Hourly flow rate (vph)	14	293	73	279	352	24	142	2	284	40	0	60
Pedestrians								10			10	
Lane Width (m)								3.7			3.7	
Walking Speed (m/s)								1.1			1.1	
Percent Blockage								1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	386			376			1350	1312	340	1575	1336	374
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	386			376			1350	1312	340	1575	1336	374
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	99			76			0	98	59	3	100	91
cM capacity (veh/h)	1161			1171			92	117	696	41	113	666
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	380	655	428	100								
Volume Left	14	279	142	40								
Volume Right	73	24	284	60								
cSH	1161	1171	217	94								
Volume to Capacity	0.01	0.24	1.97	1.06								
Queue Length 95th (m)	0.3	7.1	239.2	49.4								
Control Delay (s/veh)	0.4	5.4	490.6	193.4								
Lane LOS	A	A	F	F								
Approach Delay (s/veh)	0.4	5.4	490.6	193.4								
Approach LOS			F	F								
Intersection Summary												
Average Delay			149.1									
Intersection Capacity Utilization			74.8%		ICU Level of Service				D			
Analysis Period (min)			15									

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
Total (2028) - PM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	38	31	23	779	688	57
Future Volume (Veh/h)	38	31	23	779	688	57
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.93	0.93
Hourly flow rate (vph)	51	41	26	895	740	61
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1280	781	811			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1280	781	811			
tC, single (s)	6.8	6.9	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	66	88	97			
cM capacity (veh/h)	151	335	803			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	92	324	597	801		
Volume Left	51	26	0	0		
Volume Right	41	0	0	61		
cSH	200	803	1700	1700		
Volume to Capacity	0.46	0.03	0.35	0.47		
Queue Length 95th (m)	16.7	0.8	0.0	0.0		
Control Delay (s/veh)	37.5	1.1	0.0	0.0		
Lane LOS	E	A				
Approach Delay (s/veh)	37.5	0.4		0.0		
Approach LOS	E					
Intersection Summary						
Average Delay		2.1				
Intersection Capacity Utilization		50.4%		ICU Level of Service	A	
Analysis Period (min)		15				

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2033) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	207	230	95	156	124	119	408	110	106	440	162
Future Volume (vph)	207	230	95	156	124	119	408	110	106	440	162
Lane Group Flow (vph)	233	412	114	188	149	137	469	126	151	629	231
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.64	0.74	0.63	0.53	0.36	0.38	0.35	0.19	0.31	0.47	0.31
Control Delay (s/veh)	28.8	30.1	45.0	33.5	7.4	14.4	18.9	3.7	12.7	20.4	4.1
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	28.8	30.1	45.0	33.5	7.4	14.4	18.9	3.7	12.7	20.4	4.1
Queue Length 50th (m)	25.5	48.6	15.6	25.1	0.0	9.3	24.9	0.0	10.3	35.4	0.0
Queue Length 95th (m)	41.7	76.6	28.2	39.1	10.6	21.5	41.3	7.9	18.0	43.0	4.7
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	362	1032	451	896	803	358	1340	670	484	1328	736
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.64	0.40	0.25	0.21	0.19	0.38	0.35	0.19	0.31	0.47	0.31

Intersection Summary


Cycle Length: 100

Actuated Cycle Length: 78.1

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

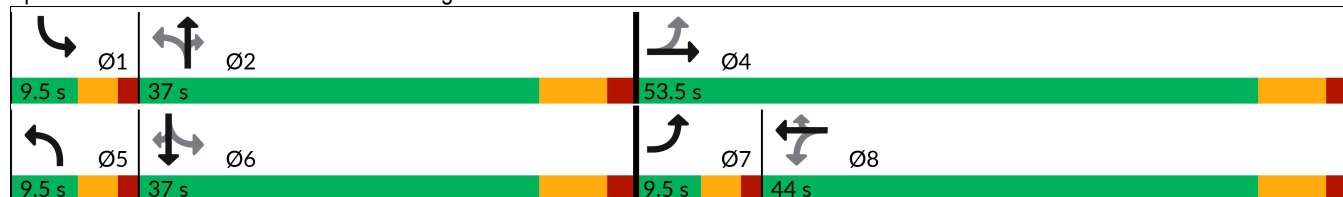

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

Total (2033) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	207	230	137	95	156	124	119	408	110	106	440	162
Future Volume (vph)	207	230	137	95	156	124	119	408	110	106	440	162
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	0.99		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.94		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1701		1732	1883	1527	1612	3476	1518	1784	3444	1548
Flt Permitted	0.48	1.00		0.52	1.00	1.00	0.36	1.00	1.00	0.47	1.00	1.00
Satd. Flow (perm)	892	1701		949	1883	1527	613	3476	1518	888	3444	1548
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	233	258	154	114	188	149	137	469	126	151	629	231
RTOR Reduction (vph)	0	27	0	0	0	121	0	0	77	0	0	142
Lane Group Flow (vph)	233	385	0	114	188	28	137	469	49	151	629	89
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	24.4	24.4		14.9	14.9	14.9	35.1	30.1	30.1	35.1	30.1	30.1
Effective Green, g (s)	24.4	24.4		14.9	14.9	14.9	35.1	30.1	30.1	35.1	30.1	30.1
Actuated g/C Ratio	0.31	0.31		0.19	0.19	0.19	0.45	0.39	0.39	0.45	0.39	0.39
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	335	532		181	359	291	339	1341	585	457	1329	597
v/s Ratio Prot	0.04	c0.23			0.10		c0.03	0.13		0.02	c0.18	
v/s Ratio Perm	0.17			0.12		0.02	0.16		0.03	0.13		0.06
v/c Ratio	0.70	0.72		0.63	0.52	0.10	0.40	0.35	0.08	0.33	0.47	0.15
Uniform Delay, d1	23.3	23.8		29.0	28.4	26.0	13.0	17.0	15.2	12.9	18.0	15.6
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	6.2	4.8		6.7	1.4	0.1	0.8	0.7	0.3	0.4	1.2	0.5
Delay (s)	29.4	28.6		35.7	29.7	26.2	13.8	17.7	15.5	13.3	19.2	16.1
Level of Service	C	C		D	C	C	B	B	B	B	B	B
Approach Delay (s/veh)		28.9			30.1			16.6			17.6	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			21.9									
HCM 2000 Volume to Capacity ratio			0.62									
Actuated Cycle Length (s)			78.0									
Intersection Capacity Utilization			81.8%									
Analysis Period (min)			15									
c Critical Lane Group												

07/15/2025

JL

Synchro 12 Report

Page 2


HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Total (2033) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	42	322	12	9	194	26	10	24	17	40	66	25
Future Volume (Veh/h)	42	322	12	9	194	26	10	24	17	40	66	25
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	52	402	15	12	262	35	16	38	27	47	78	29
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	307			427			905	855	430	883	845	300
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	307			427			905	855	430	883	845	300
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	96			99			91	85	95	77	72	96
cM capacity (veh/h)	1192			1121			179	259	599	208	275	699
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	469	309	81	154								
Volume Left	52	12	16	47								
Volume Right	15	35	27	29								
cSH	1192	1121	288	279								
Volume to Capacity	0.04	0.01	0.28	0.55								
Queue Length 95th (m)	1.0	0.2	8.6	23.4								
Control Delay (s/veh)	1.3	0.4	22.3	32.7								
Lane LOS	A	A	C	D								
Approach Delay (s/veh)	1.3	0.4	22.3	32.7								
Approach LOS			C	D								
Intersection Summary												
Average Delay			7.5									
Intersection Capacity Utilization			53.8%	ICU Level of Service				A				
Analysis Period (min)			15									

Queues
3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2033) - AM



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations								
Traffic Volume (vph)	22	321	84	173	54	0	21	0
Future Volume (vph)	22	321	84	173	54	0	21	0
Lane Group Flow (vph)	29	456	124	295	0	268	0	44
Turn Type	Perm	NA	pm+pt	NA	Perm	NA	Perm	NA
Protected Phases		4	3	8		2		6
Permitted Phases	4		8		2		6	
Detector Phase	4	4	3	8	2	2	6	6
Switch Phase								
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	23.0	23.0	9.5	23.0	27.0	27.0	27.0	27.0
Total Split (s)	23.0	23.0	9.5	32.5	27.5	27.5	27.5	27.5
Total Split (%)	38.3%	38.3%	15.8%	54.2%	45.8%	45.8%	45.8%	45.8%
Yellow Time (s)	3.0	3.0	2.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	1.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0		0.0		0.0
Total Lost Time (s)	5.0	5.0	3.0	5.0		5.0		5.0
Lead/Lag	Lag	Lag	Lead					
Lead-Lag Optimize?	Yes	Yes	Yes					
Recall Mode	None	None	None	None	Max	Max	Max	Max
v/c Ratio	0.09	0.84	0.37	0.39		0.36		0.08
Control Delay (s/veh)	16.1	35.0	11.8	12.0		5.5		1.2
Queue Delay	0.0	0.0	0.0	0.0		0.0		0.0
Total Delay (s/veh)	16.1	35.0	11.8	12.0		5.5		1.2
Queue Length 50th (m)	2.3	45.2	6.9	18.4		4.2		0.0
Queue Length 95th (m)	6.1	59.0	10.4	22.9		16.4		0.4
Internal Link Dist (m)		136.3		736.8		127.6		42.7
Turn Bay Length (m)	15.0		30.0					
Base Capacity (vph)	348	603	338	875		753		529
Starvation Cap Reductn	0	0	0	0		0		0
Spillback Cap Reductn	0	0	0	0		0		0
Storage Cap Reductn	0	0	0	0		0		0
Reduced v/c Ratio	0.08	0.76	0.37	0.34		0.36		0.08

Intersection Summary


Cycle Length: 60

Actuated Cycle Length: 56.7

Natural Cycle: 60

Control Type: Semi Act-Uncoord

Splits and Phases: 3: West Access/Sundowner Rd & CR 25

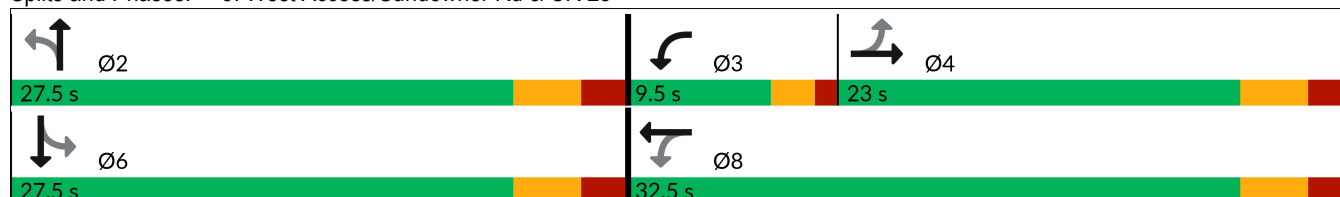

HCM Signalized Intersection Capacity Analysis

3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd

Total (2033) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	22	321	26	84	173	28	54	0	182	21	0	12
Future Volume (vph)	22	321	26	84	173	28	54	0	182	21	0	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.0	5.0		3.0	5.0			5.0			5.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frpb, ped/bikes	1.00	1.00		1.00	0.99			1.00			1.00	
Flpb, ped/bikes	0.99	1.00		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.98			0.90			0.95	
Flt Protected	0.95	1.00		0.95	1.00			0.99			0.97	
Satd. Flow (prot)	1769	1857		1788	1762			1668			1454	
Flt Permitted	0.58	1.00		0.21	1.00			0.93			0.79	
Satd. Flow (perm)	1080	1857		386	1762			1565			1180	
Peak-hour factor, PHF	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Adj. Flow (vph)	29	422	34	124	254	41	61	0	207	28	0	16
RTOR Reduction (vph)	0	5	0	0	10	0	0	124	0	0	26	0
Lane Group Flow (vph)	29	451	0	124	285	0	0	144	0	0	18	0
Confl. Peds. (#/hr)	10		10	10		10						
Heavy Vehicles (%)	2%	2%	2%	2%	4%	20%	2%	2%	2%	33%	2%	2%
Turn Type	Perm	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases		4		3	8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	16.5	16.5		24.4	24.4			22.8			22.8	
Effective Green, g (s)	16.5	16.5		24.4	24.4			22.8			22.8	
Actuated g/C Ratio	0.29	0.29		0.43	0.43			0.40			0.40	
Clearance Time (s)	5.0	5.0		3.0	5.0			5.0			5.0	
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Lane Grp Cap (vph)	311	535		284	751			623			470	
v/s Ratio Prot		c0.24		c0.04	0.16							
v/s Ratio Perm	0.03			0.15				c0.09			0.01	
v/c Ratio	0.09	0.84		0.44	0.38			0.23			0.04	
Uniform Delay, d1	14.9	19.1		11.5	11.2			11.4			10.5	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	0.1	11.6		1.1	0.3			0.9			0.1	
Delay (s)	15.0	30.7		12.6	11.5			12.3			10.6	
Level of Service	B	C		B	B			B			B	
Approach Delay (s/veh)		29.7			11.8			12.3			10.6	
Approach LOS		C			B			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			19.0			HCM 2000 Level of Service				B		
HCM 2000 Volume to Capacity ratio			0.48									
Actuated Cycle Length (s)			57.2			Sum of lost time (s)			13.0			
Intersection Capacity Utilization			49.0%			ICU Level of Service			A			
Analysis Period (min)			15									

c Critical Lane Group

07/15/2025

JL

Synchro 12 Report

Page 5

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
Total (2033) - AM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	38	20	13	599	642	30
Future Volume (Veh/h)	38	20	13	599	642	30
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.70	0.70
Hourly flow rate (vph)	51	27	15	689	917	43
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1323	949	970			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1323	949	970			
tC, single (s)	6.8	6.9	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	64	90	98			
cM capacity (veh/h)	143	259	699			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	78	245	459	960		
Volume Left	51	15	0	0		
Volume Right	27	0	0	43		
cSH	169	699	1700	1700		
Volume to Capacity	0.46	0.02	0.27	0.56		
Queue Length 95th (m)	16.4	0.5	0.0	0.0		
Control Delay (s/veh)	43.3	0.9	0.0	0.0		
Lane LOS	E	A				
Approach Delay (s/veh)	43.3	0.3		0.0		
Approach LOS	E					
Intersection Summary						
Average Delay		2.1				
Intersection Capacity Utilization		45.7%		ICU Level of Service		A
Analysis Period (min)		15				

Intersection Sign configuration not allowed in HCM analysis.

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2033) - PM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	222	257	109	248	218	194	569	125	265	575	273
Future Volume (vph)	222	257	109	248	218	194	569	125	265	575	273
Lane Group Flow (vph)	244	423	143	326	287	223	654	144	285	618	294
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.82	0.65	0.60	0.71	0.53	0.66	0.51	0.22	0.83	0.49	0.40
Control Delay (s/veh)	44.1	25.3	39.0	37.4	12.2	27.3	23.8	5.0	40.3	23.5	4.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	44.1	25.3	39.0	37.4	12.2	27.3	23.8	5.0	40.3	23.5	4.6
Queue Length 50th (m)	26.9	50.8	20.2	47.5	10.8	19.1	41.9	0.0	25.3	39.3	0.0
Queue Length 95th (m)	#52.1	79.2	30.6	58.9	19.7	#43.2	64.8	11.2	#73.6	64.0	16.9
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	296	995	428	834	808	339	1286	646	345	1261	742
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.82	0.43	0.33	0.39	0.36	0.66	0.51	0.22	0.83	0.49	0.40

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 83.9

Natural Cycle: 100

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
9.5 s	37 s	53.5 s
 Ø5	 Ø6	 Ø7
9.5 s	37 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2033) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	222	257	128	109	248	218	194	569	125	265	575	273
Future Volume (vph)	222	257	128	109	248	218	194	569	125	265	575	273
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	0.99		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.95		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1788	1761		1783	1883	1571	1671	3579	1546	1787	3510	1546
Flt Permitted	0.31	1.00		0.52	1.00	1.00	0.35	1.00	1.00	0.33	1.00	1.00
Satd. Flow (perm)	576	1761		967	1883	1571	617	3579	1546	615	3510	1546
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	244	282	141	143	326	287	223	654	144	285	618	294
RTOR Reduction (vph)	0	22	0	0	0	152	0	0	92	0	0	188
Lane Group Flow (vph)	244	401	0	143	326	135	223	654	52	285	618	106
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	30.1	30.1		20.6	20.6	20.6	35.1	30.1	30.1	35.1	30.1	30.1
Effective Green, g (s)	30.1	30.1		20.6	20.6	20.6	35.1	30.1	30.1	35.1	30.1	30.1
Actuated g/C Ratio	0.36	0.36		0.25	0.25	0.25	0.42	0.36	0.36	0.42	0.36	0.36
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	279	633		237	463	386	321	1287	555	327	1262	555
v/s Ratio Prot	c0.05	0.23			0.17		0.04	0.18		c0.05	0.18	
v/s Ratio Perm	c0.26			0.15		0.09	0.25		0.03	c0.31		0.07
v/c Ratio	0.87	0.63		0.60	0.70	0.35	0.69	0.51	0.09	0.87	0.49	0.19
Uniform Delay, d1	25.2	22.2		27.9	28.8	26.0	18.3	21.0	17.8	20.7	20.8	18.4
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	24.8	2.1		4.3	4.8	0.5	6.4	1.4	0.3	21.5	1.4	0.8
Delay (s)	50.0	24.3		32.2	33.6	26.6	24.6	22.4	18.1	42.3	22.2	19.2
Level of Service	D	C		C	C	C	C	C	B	D	C	B
Approach Delay (s/veh)		33.7			30.7			22.3			26.2	
Approach LOS		C			C			C			C	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			27.4									
HCM 2000 Volume to Capacity ratio			0.92									
Actuated Cycle Length (s)			83.7									
Intersection Capacity Utilization			91.2%									
Analysis Period (min)			15									
c Critical Lane Group												


HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Total (2033) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	28	294	5	13	384	51	8	72	24	39	50	43
Future Volume (Veh/h)	28	294	5	13	384	51	8	72	24	39	50	43
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	33	350	6	15	447	59	9	82	27	46	59	51
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage veh												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	516			366			1026	975	373	1014	949	497
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	516			366			1026	975	373	1014	949	497
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	97			99			94	65	96	68	75	91
cM capacity (veh/h)	1010			1181			146	235	660	142	239	551
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	389	521	118	156								
Volume Left	33	15	9	46								
Volume Right	6	59	27	51								
cSH	1010	1181	262	235								
Volume to Capacity	0.03	0.01	0.45	0.66								
Queue Length 95th (m)	0.8	0.3	16.7	31.6								
Control Delay (s/veh)	1.1	0.4	29.6	46.0								
Lane LOS	A	A	D	E								
Approach Delay (s/veh)	1.1	0.4	29.6	46.0								
Approach LOS			D	E								
Intersection Summary												
Average Delay			9.5									
Intersection Capacity Utilization			49.8%	ICU Level of Service					A			
Analysis Period (min)			15									

Queues
3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2033) - PM



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations								
Traffic Volume (vph)	13	298	237	331	71	1	32	0
Future Volume (vph)	13	298	237	331	71	1	32	0
Lane Group Flow (vph)	14	397	279	413	0	428	0	100
Turn Type	Perm	NA	pm+pt	NA	Perm	NA	Perm	NA
Protected Phases		4	3	8		2		6
Permitted Phases	4		8		2		6	
Detector Phase	4	4	3	8	2	2	6	6
Switch Phase								
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	22.5	22.5	9.5	22.5	25.0	25.0	25.0	25.0
Total Split (s)	22.6	22.6	12.2	34.8	25.2	25.2	25.2	25.2
Total Split (%)	37.7%	37.7%	20.3%	58.0%	42.0%	42.0%	42.0%	42.0%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	1.0	1.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0		0.0		0.0
Total Lost Time (s)	5.0	5.0	4.0	4.0		5.0		5.0
Lead/Lag	Lag	Lag	Lead					
Lead-Lag Optimize?	Yes	Yes	Yes					
Recall Mode	Max	Max	None	Max	None	None	None	None
v/c Ratio	0.04	0.65	0.55	0.39		0.82		0.24
Control Delay (s/veh)	15.5	23.1	12.1	9.1		24.5		4.8
Queue Delay	0.0	0.0	0.0	0.0		0.0		0.0
Total Delay (s/veh)	15.5	23.1	12.1	9.1		24.5		4.8
Queue Length 50th (m)	1.0	32.7	13.4	20.9		22.1		0.0
Queue Length 95th (m)	4.6	#72.6	26.8	39.7		13.6		5.5
Internal Link Dist (m)		136.3		736.8		127.6		42.7
Turn Bay Length (m)	15.0		30.0					
Base Capacity (vph)	319	612	512	1055		651		541
Starvation Cap Reductn	0	0	0	0		0		0
Spillback Cap Reductn	0	0	0	0		0		0
Storage Cap Reductn	0	0	0	0		0		0
Reduced v/c Ratio	0.04	0.65	0.54	0.39		0.66		0.18

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 55

Natural Cycle: 60

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.


Queue shown is maximum after two cycles.

Splits and Phases: 3: West Access/Sundowner Rd & CR 25



HCM Signalized Intersection Capacity Analysis 3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2033) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	13	298	67	237	331	20	71	1	142	32	0	48
Future Volume (vph)	13	298	67	237	331	20	71	1	142	32	0	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.0	5.0		4.0	4.0			5.0			5.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frpb, ped/bikes	1.00	0.99		1.00	1.00			1.00			1.00	
Flpb, ped/bikes	0.99	1.00		1.00	1.00			1.00			1.00	
Frt	1.00	0.97		1.00	0.99			0.91			0.92	
Flt Protected	0.95	1.00		0.95	1.00			0.98			0.98	
Satd. Flow (prot)	1773	1819		1786	1863			1687			1697	
Flt Permitted	0.52	1.00		0.31	1.00			0.85			0.74	
Satd. Flow (perm)	971	1819		591	1863			1458			1276	
Peak-hour factor, PHF	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Adj. Flow (vph)	14	324	73	279	389	24	142	2	284	40	0	60
RTOR Reduction (vph)	0	13	0	0	3	0	0	130	0	0	73	0
Lane Group Flow (vph)	14	384	0	279	410	0	0	298	0	0	27	0
Confl. Peds. (#/hr)	10		10	10		10						
Turn Type	Perm	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases		4		3	8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	18.2	18.2		31.1	31.1			14.8			14.8	
Effective Green, g (s)	18.2	18.2		31.1	31.1			14.8			14.8	
Actuated g/C Ratio	0.33	0.33		0.57	0.57			0.27			0.27	
Clearance Time (s)	5.0	5.0		4.0	4.0			5.0			5.0	
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Lane Grp Cap (vph)	321	603		506	1055			393			343	
v/s Ratio Prot		0.21		c0.08	0.22							
v/s Ratio Perm	0.01			c0.23				c0.20			0.02	
v/c Ratio	0.04	0.64		0.55	0.39			0.76			0.08	
Uniform Delay, d1	12.4	15.6		7.2	6.6			18.4			15.0	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	0.3	5.1		1.3	1.1			8.2			0.1	
Delay (s)	12.7	20.6		8.5	7.7			26.6			15.1	
Level of Service	B	C		A	A			C			B	
Approach Delay (s/veh)		20.4			8.0			26.6			15.1	
Approach LOS		C			A			C			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			16.4			HCM 2000 Level of Service				B		
HCM 2000 Volume to Capacity ratio			0.68									
Actuated Cycle Length (s)			54.9			Sum of lost time (s)			14.0			
Intersection Capacity Utilization			60.2%			ICU Level of Service			B			
Analysis Period (min)			15									
c Critical Lane Group												

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
Total (2033) - PM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	38	31	23	850	755	57
Future Volume (Veh/h)	38	31	23	850	755	57
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.93	0.93
Hourly flow rate (vph)	51	41	26	977	812	61
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)	397					
pX, platoon unblocked						
vC, conflicting volume	1393	853	883			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1393	853	883			
tC, single (s)	6.8	6.9	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	60	86	97			
cM capacity (veh/h)	127	300	754			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	92	352	651	873		
Volume Left	51	26	0	0		
Volume Right	41	0	0	61		
cSH	171	754	1700	1700		
Volume to Capacity	0.54	0.03	0.38	0.51		
Queue Length 95th (m)	20.8	0.8	0.0	0.0		
Control Delay (s/veh)	48.3	1.1	0.0	0.0		
Lane LOS	E	A				
Approach Delay (s/veh)	48.3	0.4	0.0			
Approach LOS	E					
Intersection Summary						
Average Delay	2.5					
Intersection Capacity Utilization	53.9%			ICU Level of Service		A
Analysis Period (min)	15					

Intersection Sign configuration not allowed in HCM analysis.

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2038) - AM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	222	248	105	168	137	126	449	120	117	484	173
Future Volume (vph)	222	248	105	168	137	126	449	120	117	484	173
Lane Group Flow (vph)	249	437	127	202	165	145	516	138	167	691	247
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	9.5	53.5	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (%)	9.5%	53.5%	44.0%	44.0%	44.0%	9.5%	37.0%	37.0%	9.5%	37.0%	37.0%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.68	0.75	0.69	0.52	0.37	0.45	0.39	0.21	0.38	0.53	0.34
Control Delay (s/veh)	29.9	30.2	48.5	32.3	6.7	17.5	20.4	4.5	14.9	22.3	4.3
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	29.9	30.2	48.5	32.3	6.7	17.5	20.4	4.5	14.9	22.3	4.3
Queue Length 50th (m)	27.5	53.2	17.8	27.2	0.0	10.5	29.0	0.0	12.1	41.4	0.0
Queue Length 95th (m)	44.2	82.3	31.7	41.4	10.6	24.3	48.0	10.1	21.0	50.1	4.8
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	368	1012	412	875	797	320	1311	658	443	1299	735
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.68	0.43	0.31	0.23	0.21	0.45	0.39	0.21	0.38	0.53	0.34

Intersection Summary

Cycle Length: 100

Actuated Cycle Length: 80

Natural Cycle: 100

Control Type: Semi Act-Uncoord

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
9.5 s	37 s	53.5 s
 Ø5	 Ø6	 Ø7
9.5 s	37 s	44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

Total (2038) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	222	248	141	105	168	137	126	449	120	117	484	173
Future Volume (vph)	222	248	141	105	168	137	126	449	120	117	484	173
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	0.99		1.00	1.00	0.98	1.00	1.00	0.97	1.00	1.00	0.97
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.95		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1768	1706		1732	1883	1527	1613	3476	1518	1785	3444	1547
Flt Permitted	0.47	1.00		0.49	1.00	1.00	0.32	1.00	1.00	0.43	1.00	1.00
Satd. Flow (perm)	871	1706		888	1883	1527	538	3476	1518	814	3444	1547
Peak-hour factor, PHF	0.89	0.89	0.89	0.83	0.83	0.83	0.87	0.87	0.87	0.70	0.70	0.70
Adj. Flow (vph)	249	279	158	127	202	165	145	516	138	167	691	247
RTOR Reduction (vph)	0	26	0	0	0	131	0	0	86	0	0	154
Lane Group Flow (vph)	249	411	0	127	202	34	145	516	52	167	691	93
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	3%	4%	9%	5%	2%	5%	13%	5%	4%	2%	6%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	26.2	26.2		16.7	16.7	16.7	35.2	30.2	30.2	35.2	30.2	30.2
Effective Green, g (s)	26.2	26.2		16.7	16.7	16.7	35.2	30.2	30.2	35.2	30.2	30.2
Actuated g/C Ratio	0.33	0.33		0.21	0.21	0.21	0.44	0.38	0.38	0.44	0.38	0.38
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	341	559		185	393	319	304	1313	573	419	1301	584
v/s Ratio Prot	0.05	c0.24			0.11		c0.03	0.15		0.02	c0.20	
v/s Ratio Perm	0.19			0.14		0.02	0.18		0.03	0.15		0.06
v/c Ratio	0.73	0.74		0.69	0.51	0.11	0.48	0.39	0.09	0.40	0.53	0.16
Uniform Delay, d1	23.6	23.8		29.2	28.0	25.6	14.0	18.2	16.0	13.8	19.3	16.5
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	7.8	5.0		10.1	1.1	0.2	1.2	0.9	0.3	0.6	1.6	0.6
Delay (s)	31.4	28.8		39.3	29.1	25.7	15.2	19.0	16.3	14.4	20.9	17.0
Level of Service	C	C		D	C	C	B	B	B	B	C	B
Approach Delay (s/veh)		29.8			30.6			17.9			19.1	
Approach LOS		C			C			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			23.0									
HCM 2000 Volume to Capacity ratio			0.66									
Actuated Cycle Length (s)			79.9									
Intersection Capacity Utilization			83.6%									
Analysis Period (min)			15									
c Critical Lane Group												

07/16/2025

JL

Synchro 12 Report

Page 2

HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Total (2038) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	44	352	13	10	209	27	11	25	19	43	69	28
Future Volume (Veh/h)	44	352	13	10	209	27	11	25	19	43	69	28
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.80	0.80	0.80	0.74	0.74	0.74	0.64	0.64	0.64	0.85	0.85	0.85
Hourly flow rate (vph)	55	440	16	14	282	36	17	39	30	51	81	33
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type	None			None								
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	328			466			980	924	468	956	914	320
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	328			466			980	924	468	956	914	320
tC, single (s)	4.2			4.1			7.1	6.7	6.3	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.2	3.4	3.5	4.0	3.4
p0 queue free %	95			99			89	83	95	72	67	95
cM capacity (veh/h)	1171			1085			151	234	570	180	249	680
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	511	332	86	165								
Volume Left	55	14	17	51								
Volume Right	16	36	30	33								
cSH	1171	1085	259	251								
Volume to Capacity	0.05	0.01	0.33	0.66								
Queue Length 95th (m)	1.1	0.3	10.6	31.5								
Control Delay (s/veh)	1.4	0.5	25.7	43.1								
Lane LOS	A	A	D	E								
Approach Delay (s/veh)	1.4	0.5	25.7	43.1								
Approach LOS			D	E								
Intersection Summary												
Average Delay			9.3									
Intersection Capacity Utilization			56.4%	ICU Level of Service					B			
Analysis Period (min)			15									

Queues
3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2038) - AM

								
Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations								
Traffic Volume (vph)	22	352	84	189	54	0	21	0
Future Volume (vph)	22	352	84	189	54	0	21	0
Lane Group Flow (vph)	29	497	124	319	0	268	0	44
Turn Type	Perm	NA	pm+pt	NA	Perm	NA	Perm	NA
Protected Phases		4	3	8		2		6
Permitted Phases	4		8		2		6	
Detector Phase	4	4	3	8	2	2	6	6
Switch Phase								
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	23.0	23.0	9.5	23.0	27.0	27.0	27.0	27.0
Total Split (s)	23.0	23.0	9.5	32.5	27.5	27.5	27.5	27.5
Total Split (%)	38.3%	38.3%	15.8%	54.2%	45.8%	45.8%	45.8%	45.8%
Yellow Time (s)	3.0	3.0	2.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	1.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0		0.0		0.0
Total Lost Time (s)	5.0	5.0	3.0	5.0		5.0		5.0
Lead/Lag	Lag	Lag	Lead					
Lead-Lag Optimize?	Yes	Yes	Yes					
Recall Mode	None	None	None	None	Max	Max	Max	Max
v/c Ratio	0.09	0.89	0.38	0.42		0.36		0.08
Control Delay (s/veh)	16.1	40.7	11.9	12.4		5.6		1.2
Queue Delay	0.0	0.0	0.0	0.0		0.0		0.0
Total Delay (s/veh)	16.1	40.7	11.9	12.4		5.6		1.2
Queue Length 50th (m)	2.3	50.8	6.9	20.4		4.2		0.0
Queue Length 95th (m)	6.1	#73.8	10.4	25.0		16.4		0.4
Internal Link Dist (m)		136.3		736.8		127.6		42.7
Turn Bay Length (m)	15.0		30.0					
Base Capacity (vph)	335	595	334	867		746		522
Starvation Cap Reductn	0	0	0	0		0		0
Spillback Cap Reductn	0	0	0	0		0		0
Storage Cap Reductn	0	0	0	0		0		0
Reduced v/c Ratio	0.09	0.84	0.37	0.37		0.36		0.08

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 57.2

Natural Cycle: 60

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: West Access/Sundowner Rd & CR 25

 Ø2	 Ø3	 Ø4
27.5 s	9.5 s	23 s
 Ø6	 Ø8	
27.5 s	32.5 s	

HCM Signalized Intersection Capacity Analysis

3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd

Total (2038) - AM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	22	352	26	84	189	28	54	0	182	21	0	12
Future Volume (vph)	22	352	26	84	189	28	54	0	182	21	0	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.0	5.0		3.0	5.0			5.0			5.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frpb, ped/bikes	1.00	1.00		1.00	1.00			1.00			1.00	
Flpb, ped/bikes	0.99	1.00		1.00	1.00			1.00			1.00	
Frt	1.00	0.99		1.00	0.98			0.90			0.95	
Flt Protected	0.95	1.00		0.95	1.00			0.99			0.97	
Satd. Flow (prot)	1770	1859		1788	1768			1668			1454	
Flt Permitted	0.57	1.00		0.20	1.00			0.93			0.79	
Satd. Flow (perm)	1056	1859		375	1768			1565			1178	
Peak-hour factor, PHF	0.76	0.76	0.76	0.68	0.68	0.68	0.88	0.88	0.88	0.75	0.75	0.75
Adj. Flow (vph)	29	463	34	124	278	41	61	0	207	28	0	16
RTOR Reduction (vph)	0	4	0	0	9	0	0	126	0	0	27	0
Lane Group Flow (vph)	29	493	0	124	310	0	0	142	0	0	17	0
Confl. Peds. (#/hr)	10		10	10		10						
Heavy Vehicles (%)	2%	2%	2%	2%	4%	20%	2%	2%	2%	33%	2%	2%
Turn Type	Perm	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases		4		3	8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	17.1	17.1		25.1	25.1			22.7			22.7	
Effective Green, g (s)	17.1	17.1		25.1	25.1			22.7			22.7	
Actuated g/C Ratio	0.30	0.30		0.43	0.43			0.39			0.39	
Clearance Time (s)	5.0	5.0		3.0	5.0			5.0			5.0	
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Lane Grp Cap (vph)	312	549		285	767			614			462	
v/s Ratio Prot		c0.27		c0.04	0.18							
v/s Ratio Perm	0.03			0.15				c0.09			0.01	
v/c Ratio	0.09	0.90		0.44	0.40			0.23			0.04	
Uniform Delay, d1	14.7	19.5		11.7	11.2			11.7			10.8	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	0.1	17.2		1.1	0.3			0.9			0.2	
Delay (s)	14.9	36.7		12.8	11.6			12.6			11.0	
Level of Service	B	D		B	B			B			B	
Approach Delay (s/veh)		35.5			11.9			12.6			11.0	
Approach LOS		D			B			B			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			21.7			HCM 2000 Level of Service				C		
HCM 2000 Volume to Capacity ratio			0.51									
Actuated Cycle Length (s)			57.8			Sum of lost time (s)			13.0			
Intersection Capacity Utilization			50.7%			ICU Level of Service			A			
Analysis Period (min)			15									

c Critical Lane Group

07/16/2025

JL

Synchro 12 Report

Page 5

HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
Total (2038) - AM

						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	38	20	13	657	700	30
Future Volume (Veh/h)	38	20	13	657	700	30
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.70	0.70
Hourly flow rate (vph)	51	27	15	755	1000	43
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1439	1032	1053			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1439	1032	1053			
tC, single (s)	6.8	6.9	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	57	88	98			
cM capacity (veh/h)	120	228	650			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	78	267	503	1043		
Volume Left	51	15	0	0		
Volume Right	27	0	0	43		
cSH	143	650	1700	1700		
Volume to Capacity	0.54	0.02	0.30	0.61		
Queue Length 95th (m)	20.5	0.5	0.0	0.0		
Control Delay (s/veh)	56.7	0.9	0.0	0.0		
Lane LOS	F	A				
Approach Delay (s/veh)	56.7	0.3		0.0		
Approach LOS	F					
Intersection Summary						
Average Delay		2.5				
Intersection Capacity Utilization		48.7%		ICU Level of Service		A
Analysis Period (min)		15				

Queues
1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd
Total (2038) - PM

											
Lane Group	EBL	EBT	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	238	277	120	267	240	203	627	137	293	633	293
Future Volume (vph)	238	277	120	267	240	203	627	137	293	633	293
Lane Group Flow (vph)	262	449	158	351	316	233	721	157	315	681	315
Turn Type	pm+pt	NA	Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4		8		5	2		1	6	
Permitted Phases	4		8		8	2		2	6		6
Detector Phase	7	4	8	8	8	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	5.0	10.0	5.0	5.0	5.0	5.0	30.0	30.0	5.0	30.0	30.0
Minimum Split (s)	9.5	44.0	44.0	44.0	44.0	9.5	37.0	37.0	9.5	37.0	37.0
Total Split (s)	12.0	56.0	44.0	44.0	44.0	16.5	37.0	37.0	17.0	37.5	37.5
Total Split (%)	10.9%	50.9%	40.0%	40.0%	40.0%	15.0%	33.6%	33.6%	15.5%	34.1%	34.1%
Yellow Time (s)	3.0	5.0	5.0	5.0	5.0	3.0	5.0	5.0	3.0	5.0	5.0
All-Red Time (s)	1.5	2.0	2.0	2.0	2.0	1.5	2.0	2.0	1.5	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	4.5	7.0	7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lead/Lag	Lead		Lag	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	Max	Max	None	Max	Max
v/c Ratio	0.89	0.66	0.71	0.75	0.51	0.65	0.65	0.27	0.83	0.61	0.45
Control Delay (s/veh)	54.5	28.7	50.9	43.7	6.8	25.7	33.9	6.2	38.4	32.3	5.6
Queue Delay	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Delay (s/veh)	54.5	28.7	50.9	43.7	6.8	25.7	33.9	6.2	38.4	32.3	5.6
Queue Length 50th (m)	34.0	65.2	27.2	61.0	1.6	23.6	60.9	0.0	33.2	56.5	0.0
Queue Length 95th (m)	#66.6	95.8	38.9	72.1	9.1	47.0	91.3	13.5	#90.7	89.3	20.2
Internal Link Dist (m)		736.8		238.4			326.5			186.5	
Turn Bay Length (m)	70.0		120.0		110.0	200.0		125.0	80.0		80.0
Base Capacity (vph)	295	901	338	715	784	372	1102	582	378	1123	706
Starvation Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Spillback Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Storage Cap Reductn	0	0	0	0	0	0	0	0	0	0	0
Reduced v/c Ratio	0.89	0.50	0.47	0.49	0.40	0.63	0.65	0.27	0.83	0.61	0.45

Intersection Summary

Cycle Length: 110

Actuated Cycle Length: 97.9

Natural Cycle: 100

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 1: CR 93 & CR 25/Yonge St

 Ø1	 Ø2	 Ø4
17 s	37 s	56 s
 Ø5	 Ø6	 Ø7
16.5 s	37.5 s	12 s
		 Ø8
		44 s

HCM Signalized Intersection Capacity Analysis

1: CR 93 & CR 25/Yonge St

659 Balm Beach Rd

Total (2038) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	238	277	132	120	267	240	203	627	137	293	633	293
Future Volume (vph)	238	277	132	120	267	240	203	627	137	293	633	293
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Lane Util. Factor	1.00	1.00		1.00	1.00	1.00	1.00	0.95	1.00	1.00	0.95	1.00
Frpb, ped/bikes	1.00	0.99		1.00	1.00	0.98	1.00	1.00	0.96	1.00	1.00	0.96
Flpb, ped/bikes	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt	1.00	0.95		1.00	1.00	0.85	1.00	1.00	0.85	1.00	1.00	0.85
Flt Protected	0.95	1.00		0.95	1.00	1.00	0.95	1.00	1.00	0.95	1.00	1.00
Satd. Flow (prot)	1788	1764		1782	1883	1569	1672	3579	1542	1788	3510	1542
Flt Permitted	0.26	1.00		0.48	1.00	1.00	0.28	1.00	1.00	0.23	1.00	1.00
Satd. Flow (perm)	493	1764		891	1883	1569	500	3579	1542	433	3510	1542
Peak-hour factor, PHF	0.91	0.91	0.91	0.76	0.76	0.76	0.87	0.87	0.87	0.93	0.93	0.93
Adj. Flow (vph)	262	304	145	158	351	316	233	721	157	315	681	315
RTOR Reduction (vph)	0	18	0	0	0	228	0	0	109	0	0	214
Lane Group Flow (vph)	262	431	0	158	351	88	233	721	48	315	681	101
Confl. Peds. (#/hr)	10		10	10		10	10		10	10		10
Heavy Vehicles (%)	2%	2%	5%	2%	2%	2%	9%	2%	2%	2%	4%	2%
Turn Type	pm+pt	NA		Perm	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	7	4			8		5	2		1	6	
Permitted Phases	4			8		8	2		2	6		6
Actuated Green, G (s)	36.6	36.6		24.6	24.6	24.6	41.6	30.2	30.2	44.0	31.4	31.4
Effective Green, g (s)	36.6	36.6		24.6	24.6	24.6	41.6	30.2	30.2	44.0	31.4	31.4
Actuated g/C Ratio	0.37	0.37		0.25	0.25	0.25	0.42	0.31	0.31	0.45	0.32	0.32
Clearance Time (s)	4.5	7.0		7.0	7.0	7.0	4.5	7.0	7.0	4.5	7.0	7.0
Vehicle Extension (s)	3.0	3.0		3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Lane Grp Cap (vph)	283	659		223	473	394	348	1104	475	368	1125	494
v/s Ratio Prot	c0.07	0.24			0.19		0.08	0.20		c0.11	0.19	
v/s Ratio Perm	c0.27			0.18		0.06	0.21		0.03	c0.27		0.07
v/c Ratio	0.93	0.65		0.71	0.74	0.22	0.67	0.65	0.10	0.86	0.61	0.20
Uniform Delay, d1	28.0	25.4		33.4	33.7	29.1	19.3	29.3	24.2	19.4	28.0	24.2
Progression Factor	1.00	1.00		1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Incremental Delay, d2	34.2	2.3		9.9	6.2	0.3	4.8	3.0	0.4	17.4	2.4	0.9
Delay (s)	62.2	27.8		43.2	39.9	29.4	24.2	32.3	24.6	36.8	30.4	25.1
Level of Service	E	C		D	D	C	C	C	C	D	C	C
Approach Delay (s/veh)		40.5			36.5			29.5			30.7	
Approach LOS		D			D			C			C	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			33.3									
HCM 2000 Volume to Capacity ratio			0.94									
Actuated Cycle Length (s)			97.9									
Intersection Capacity Utilization			94.3%									
Analysis Period (min)			15									
c Critical Lane Group												

07/16/2025

JL

Synchro 12 Report

Page 2


HCM Unsignalized Intersection Capacity Analysis 2: Marshall Rd/Wilson Rd & CR 25

659 Balm Beach Rd
Total (2038) - PM

												
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (veh/h)	30	319	6	13	420	53	9	76	26	41	53	48
Future Volume (Veh/h)	30	319	6	13	420	53	9	76	26	41	53	48
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.84	0.84	0.84	0.86	0.86	0.86	0.88	0.88	0.88	0.85	0.85	0.85
Hourly flow rate (vph)	36	380	7	15	488	62	10	86	30	48	62	56
Pedestrians		10			10			10			10	
Lane Width (m)		3.7			3.7			3.7			3.7	
Walking Speed (m/s)		1.1			1.1			1.1			1.1	
Percent Blockage		1			1			1			1	
Right turn flare (veh)												
Median type		None			None							
Median storage (veh)												
Upstream signal (m)												
pX, platoon unblocked												
vC, conflicting volume	560			397			1112	1056	404	1098	1028	539
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	560			397			1112	1056	404	1098	1028	539
tC, single (s)	4.2			4.1			7.1	6.5	6.2	7.1	6.6	6.3
tC, 2 stage (s)												
tF (s)	2.3			2.2			3.5	4.0	3.3	3.5	4.1	3.4
p0 queue free %	96			99			92	59	95	58	71	89
cM capacity (veh/h)	972			1150			120	210	634	115	214	521
Direction, Lane #	EB 1	WB 1	NB 1	SB 1								
Volume Total	423	565	126	166								
Volume Left	36	15	10	48								
Volume Right	7	62	30	56								
cSH	972	1150	233	204								
Volume to Capacity	0.04	0.01	0.54	0.81								
Queue Length 95th (m)	0.9	0.3	22.0	44.6								
Control Delay (s/veh)	1.1	0.4	37.2	71.5								
Lane LOS	A	A	E	F								
Approach Delay (s/veh)	1.1	0.4	37.2	71.5								
Approach LOS			E	F								
Intersection Summary												
Average Delay			13.5									
Intersection Capacity Utilization			53.2%		ICU Level of Service				A			
Analysis Period (min)			15									

Queues
3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2038) - PM



Lane Group	EBL	EBT	WBL	WBT	NBL	NBT	SBL	SBT
Lane Configurations								
Traffic Volume (vph)	13	328	237	367	71	1	32	0
Future Volume (vph)	13	328	237	367	71	1	32	0
Lane Group Flow (vph)	14	430	279	456	0	428	0	100
Turn Type	Perm	NA	pm+pt	NA	Perm	NA	Perm	NA
Protected Phases		4	3	8		2		6
Permitted Phases	4		8		2		6	
Detector Phase	4	4	3	8	2	2	6	6
Switch Phase								
Minimum Initial (s)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
Minimum Split (s)	22.5	22.5	9.5	22.5	25.0	25.0	25.0	25.0
Total Split (s)	22.6	22.6	12.2	34.8	25.2	25.2	25.2	25.2
Total Split (%)	37.7%	37.7%	20.3%	58.0%	42.0%	42.0%	42.0%	42.0%
Yellow Time (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
All-Red Time (s)	2.0	2.0	1.0	1.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0		0.0		0.0
Total Lost Time (s)	5.0	5.0	4.0	4.0		5.0		5.0
Lead/Lag	Lag	Lag	Lead					
Lead-Lag Optimize?	Yes	Yes	Yes					
Recall Mode	Max	Max	None	Max	None	None	None	None
v/c Ratio	0.05	0.70	0.58	0.43		0.82		0.24
Control Delay (s/veh)	15.6	25.6	13.2	9.5		24.5		4.8
Queue Delay	0.0	0.0	0.0	0.0		0.0		0.0
Total Delay (s/veh)	15.6	25.6	13.2	9.5		24.5		4.8
Queue Length 50th (m)	1.0	36.6	13.4	23.9		22.1		0.0
Queue Length 95th (m)	4.6	#82.3	26.8	44.9		13.6		5.5
Internal Link Dist (m)		136.3		736.8		127.6		42.7
Turn Bay Length (m)	15.0		30.0					
Base Capacity (vph)	306	610	484	1056		651		541
Starvation Cap Reductn	0	0	0	0		0		0
Spillback Cap Reductn	0	0	0	0		0		0
Storage Cap Reductn	0	0	0	0		0		0
Reduced v/c Ratio	0.05	0.70	0.58	0.43		0.66		0.18

Intersection Summary

Cycle Length: 60

Actuated Cycle Length: 55

Natural Cycle: 60

Control Type: Semi Act-Uncoord

95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: West Access/Sundowner Rd & CR 25



HCM Signalized Intersection Capacity Analysis

3: West Access/Sundowner Rd & CR 25

659 Balm Beach Rd
Total (2038) - PM

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Traffic Volume (vph)	13	328	67	237	367	20	71	1	142	32	0	48
Future Volume (vph)	13	328	67	237	367	20	71	1	142	32	0	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Total Lost time (s)	5.0	5.0		4.0	4.0			5.0			5.0	
Lane Util. Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Frpb, ped/bikes	1.00	0.99		1.00	1.00			1.00			1.00	
Flpb, ped/bikes	0.99	1.00		1.00	1.00			1.00			1.00	
Frt	1.00	0.97		1.00	0.99			0.91			0.92	
Flt Protected	0.95	1.00		0.95	1.00			0.98			0.98	
Satd. Flow (prot)	1774	1824		1787	1865			1687			1697	
Flt Permitted	0.50	1.00		0.28	1.00			0.85			0.74	
Satd. Flow (perm)	934	1824		523	1865			1458			1276	
Peak-hour factor, PHF	0.92	0.92	0.92	0.85	0.85	0.85	0.50	0.50	0.50	0.80	0.80	0.80
Adj. Flow (vph)	14	357	73	279	432	24	142	2	284	40	0	60
RTOR Reduction (vph)	0	11	0	0	3	0	0	130	0	0	73	0
Lane Group Flow (vph)	14	419	0	279	453	0	0	298	0	0	27	0
Confl. Peds. (#/hr)	10		10	10		10						
Turn Type	Perm	NA		pm+pt	NA		Perm	NA		Perm	NA	
Protected Phases		4		3	8			2			6	
Permitted Phases	4			8			2			6		
Actuated Green, G (s)	18.1	18.1		31.1	31.1			14.8			14.8	
Effective Green, g (s)	18.1	18.1		31.1	31.1			14.8			14.8	
Actuated g/C Ratio	0.33	0.33		0.57	0.57			0.27			0.27	
Clearance Time (s)	5.0	5.0		4.0	4.0			5.0			5.0	
Vehicle Extension (s)	3.0	3.0		3.0	3.0			3.0			3.0	
Lane Grp Cap (vph)	307	601		480	1056			393			343	
v/s Ratio Prot		c0.23		c0.08	0.24							
v/s Ratio Perm	0.01			0.24				c0.20			0.02	
v/c Ratio	0.05	0.70		0.58	0.43			0.76			0.08	
Uniform Delay, d1	12.5	16.0		7.5	6.8			18.4			15.0	
Progression Factor	1.00	1.00		1.00	1.00			1.00			1.00	
Incremental Delay, d2	0.3	6.6		1.8	1.3			8.2			0.1	
Delay (s)	12.8	22.6		9.3	8.1			26.6			15.1	
Level of Service	B	C		A	A			C			B	
Approach Delay (s/veh)		22.3			8.6			26.6			15.1	
Approach LOS		C			A			C			B	
Intersection Summary												
HCM 2000 Control Delay (s/veh)			17.0			HCM 2000 Level of Service				B		
HCM 2000 Volume to Capacity ratio			0.70									
Actuated Cycle Length (s)			54.9			Sum of lost time (s)			14.0			
Intersection Capacity Utilization			61.8%			ICU Level of Service			B			
Analysis Period (min)			15									
c Critical Lane Group												


HCM Unsignalized Intersection Capacity Analysis 4: CR 93 & East Access

659 Balm Beach Rd
Total (2038) - PM


						
Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations						
Traffic Volume (veh/h)	38	31	23	929	828	57
Future Volume (Veh/h)	38	31	23	929	828	57
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.75	0.75	0.87	0.87	0.93	0.93
Hourly flow rate (vph)	51	41	26	1068	890	61
Pedestrians	10					
Lane Width (m)	3.7					
Walking Speed (m/s)	1.1					
Percent Blockage	1					
Right turn flare (veh)						
Median type				None	None	
Median storage veh						
Upstream signal (m)					397	
pX, platoon unblocked						
vC, conflicting volume	1517	931	961			
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	1517	931	961			
tC, single (s)	6.8	6.9	4.1			
tC, 2 stage (s)						
tF (s)	3.5	3.3	2.2			
p0 queue free %	51	85	96			
cM capacity (veh/h)	105	266	705			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	92	382	712	951		
Volume Left	51	26	0	0		
Volume Right	41	0	0	61		
cSH	144	705	1700	1700		
Volume to Capacity	0.64	0.04	0.42	0.56		
Queue Length 95th (m)	26.4	0.9	0.0	0.0		
Control Delay (s/veh)	66.5	1.1	0.0	0.0		
Lane LOS	F	A				
Approach Delay (s/veh)	66.5	0.4		0.0		
Approach LOS	F					
Intersection Summary						
Average Delay		3.1				
Intersection Capacity Utilization		57.8%		ICU Level of Service		B
Analysis Period (min)		15				

Intersection Sign configuration not allowed in HCM analysis.


Appendix H – MTO Left Turn Analysis

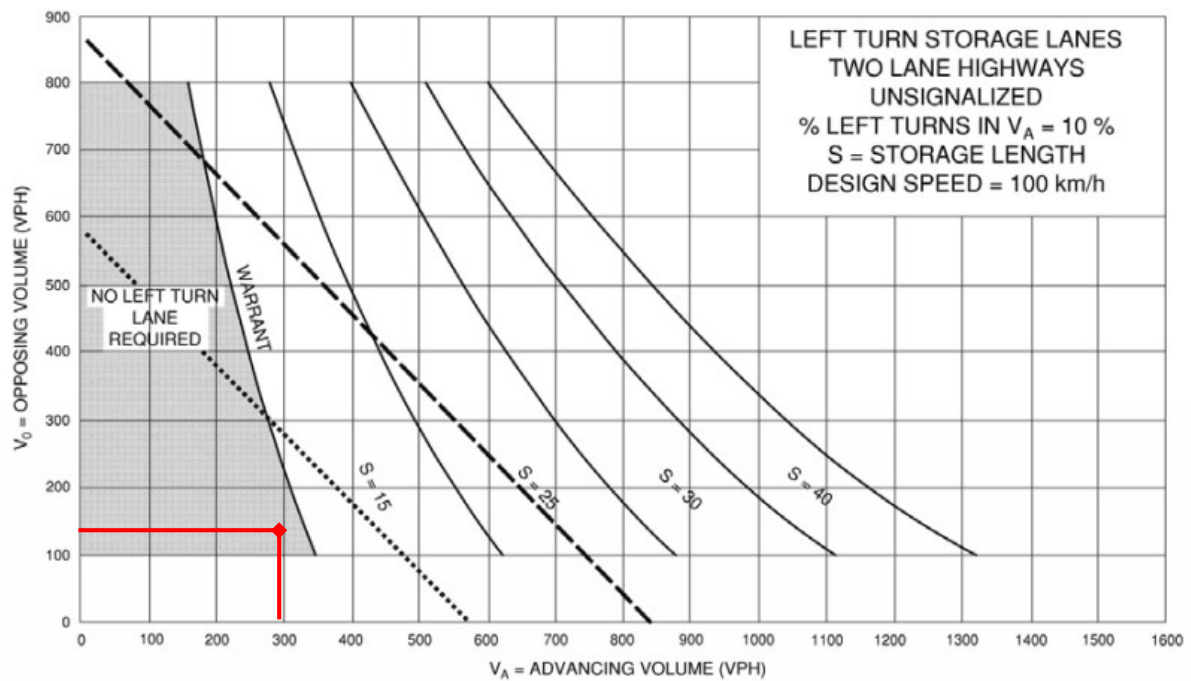


Existing (2025) AM Peak – EB on County Road 25 at Wilson Road / Marshall Road

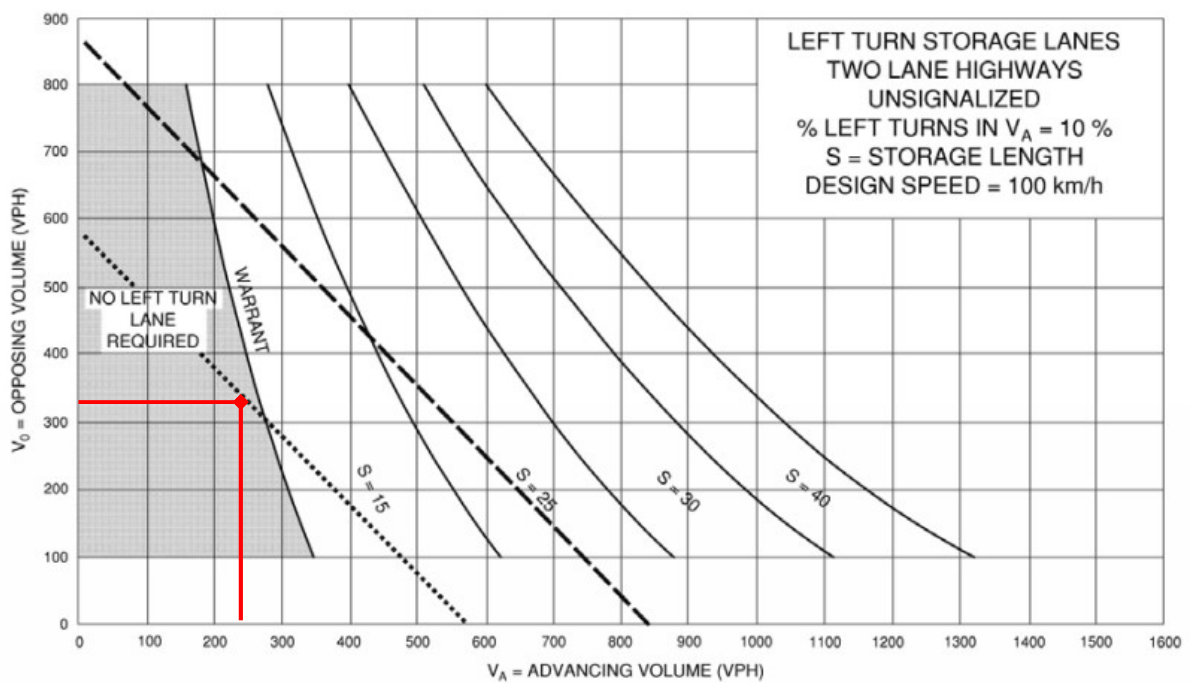


Existing (2025) PM Peak – EB on County Road 25 at Wilson Road / Marshall Road

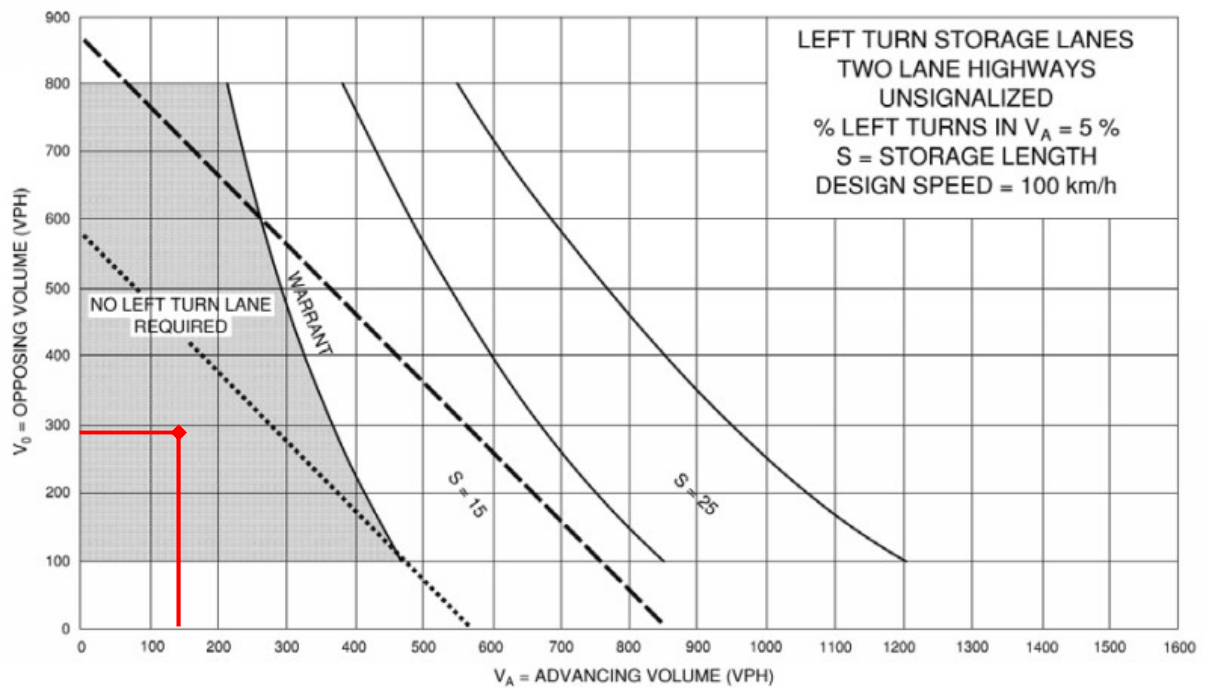


Existing (2025) AM Peak – WB on County Road 25 at Wilson Road / Marshall Road

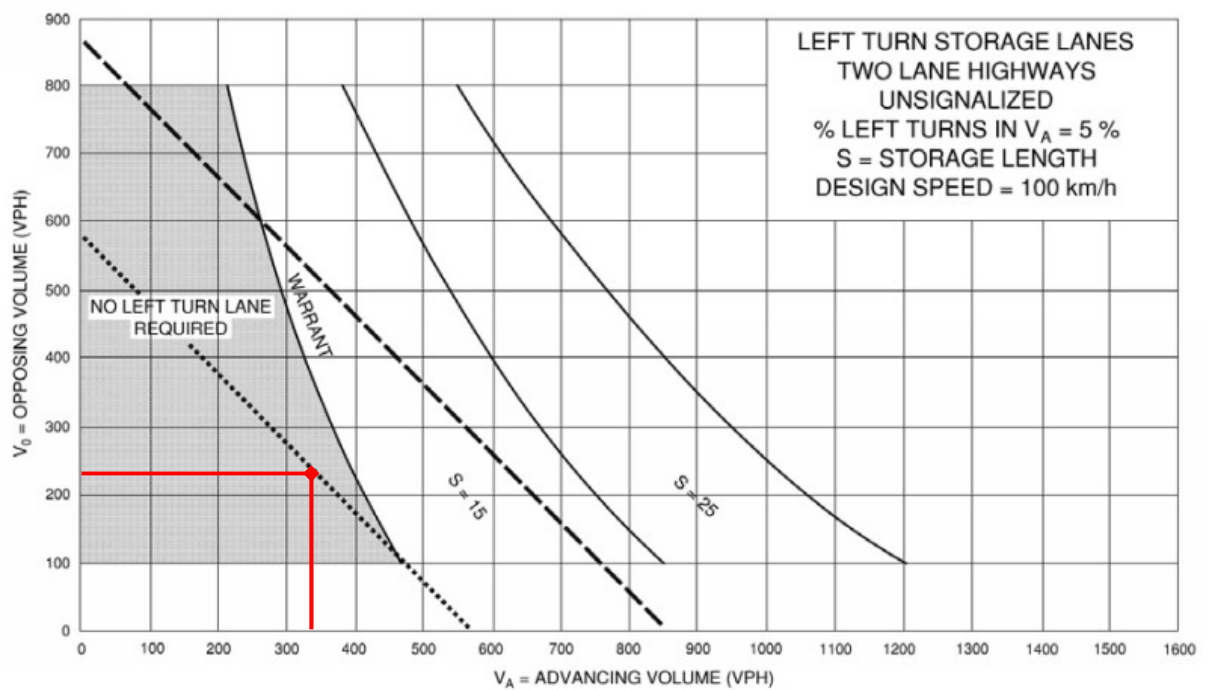


Existing (2025) PM Peak – WB on County Road 25 at Wilson Road / Marshall Road

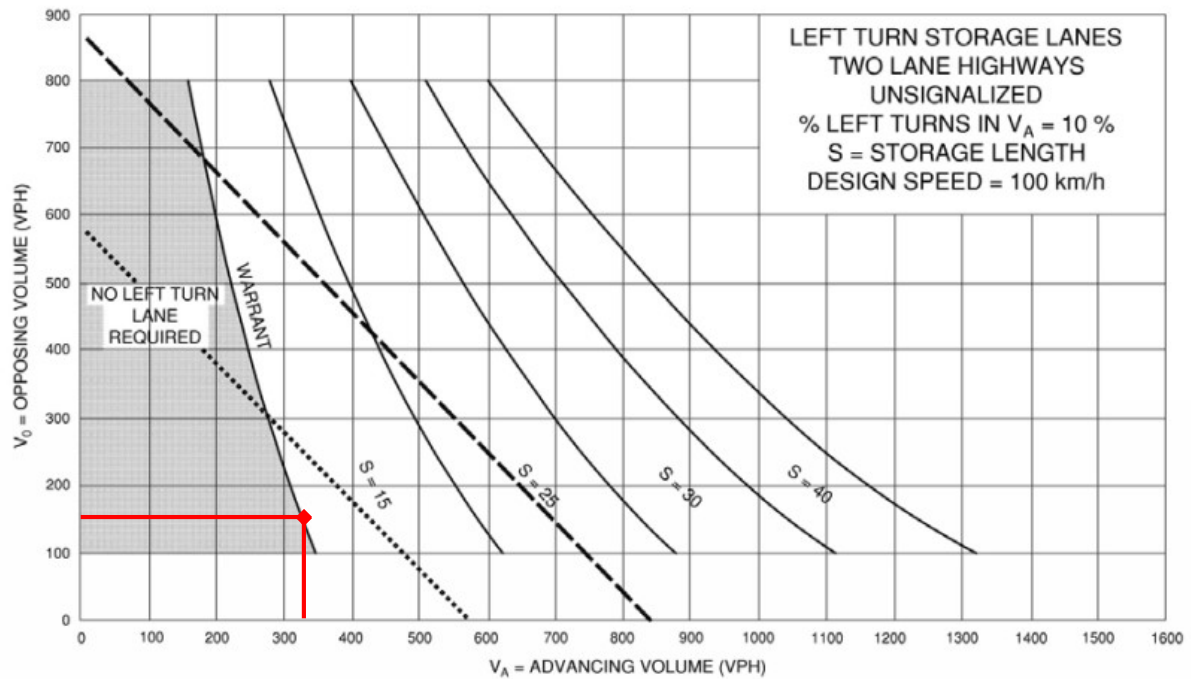


BG (2028) AM Peak – EB on County Road 25 at Wilson Road / Marshall Road

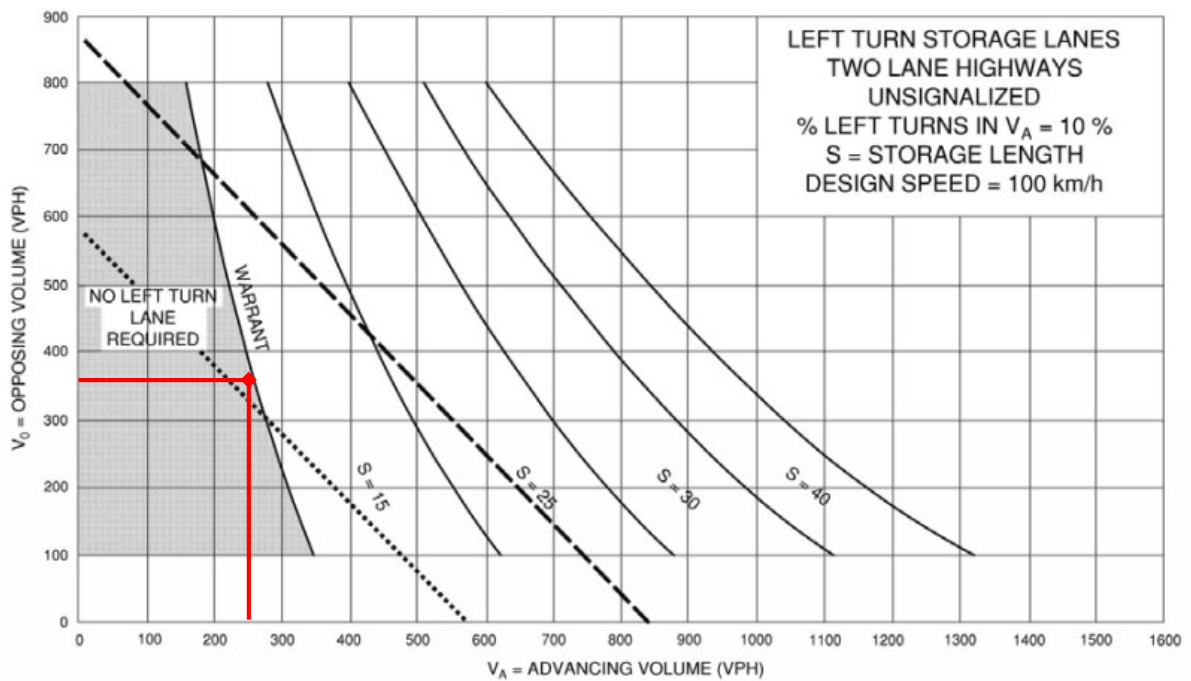


BG (2028) PM Peak – EB on County Road 25 at Wilson Road / Marshall Road

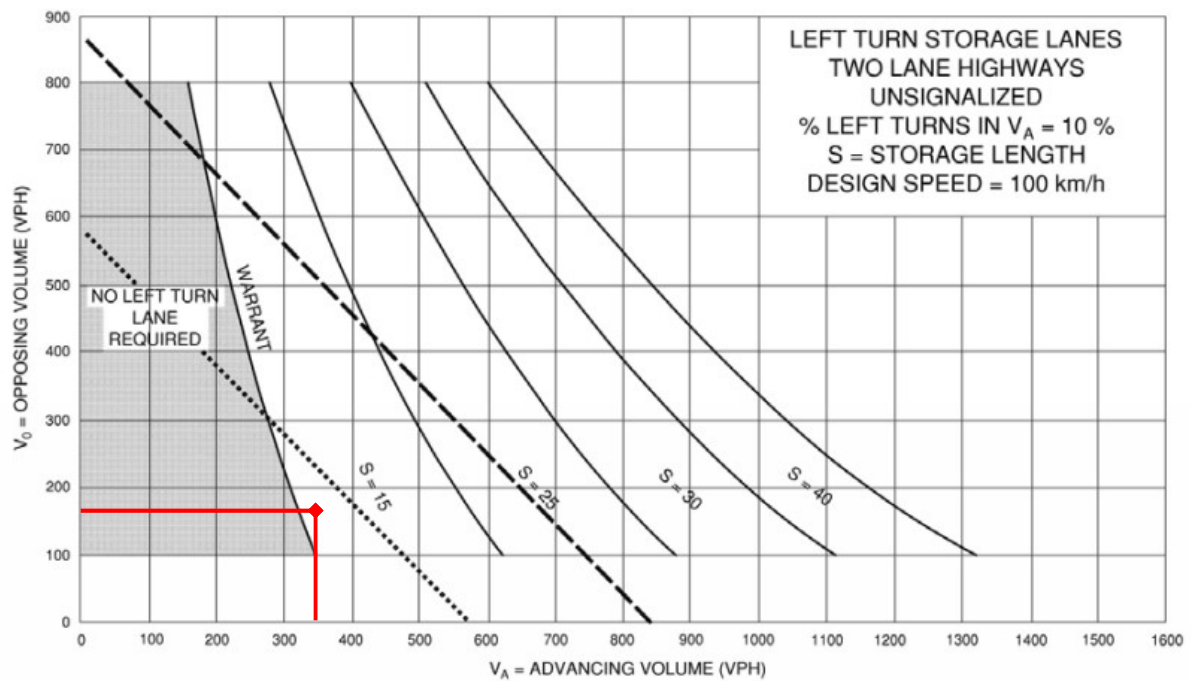


BG (2033) AM Peak – EB on County Road 25 at Wilson Road / Marshall Road

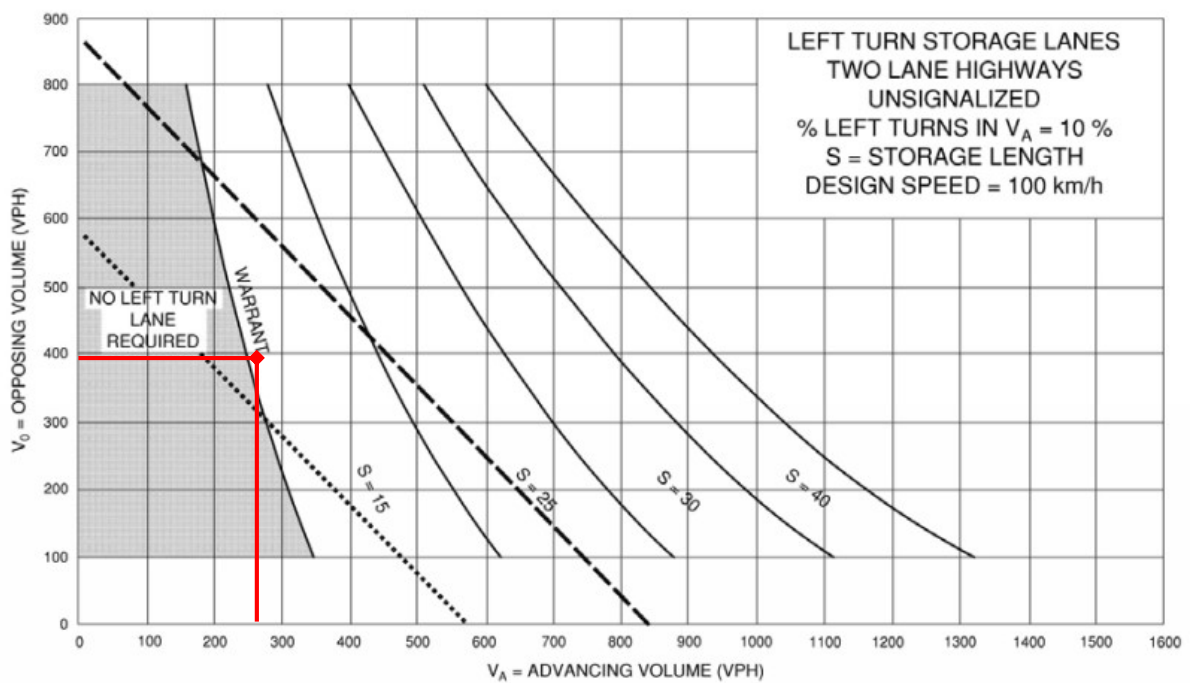


BG (2033) PM Peak – EB on County Road 25 at Wilson Road / Marshall Road

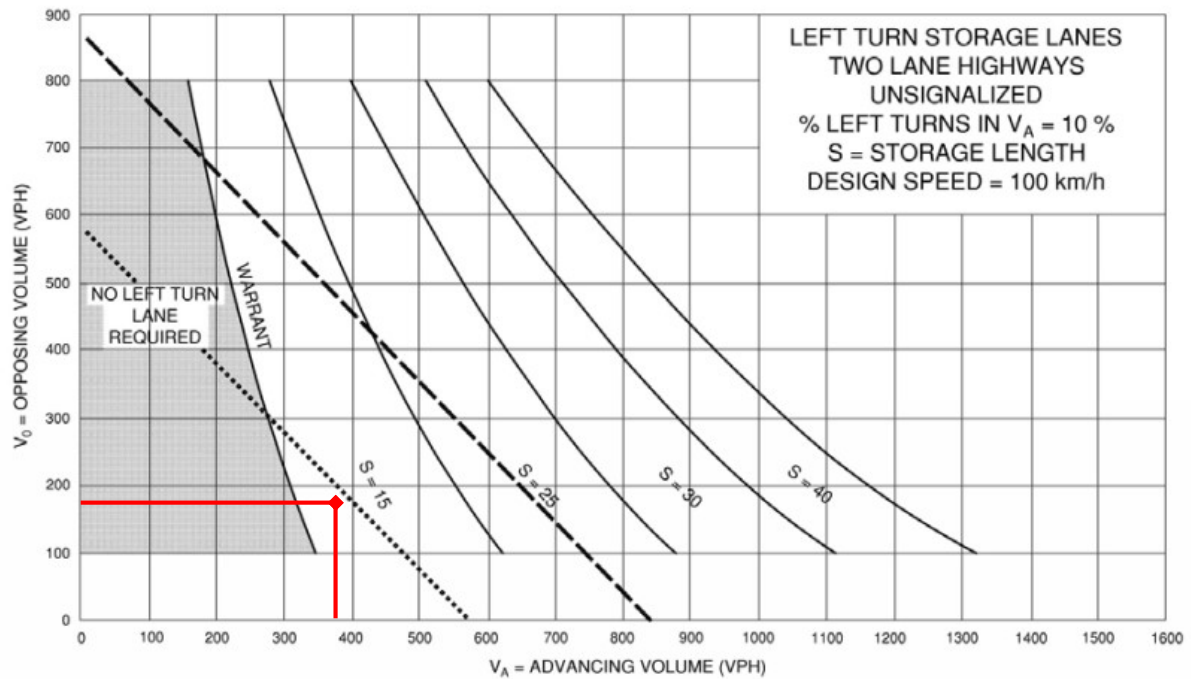


BG (2038) AM Peak – EB on County Road 25 at Wilson Road / Marshall Road

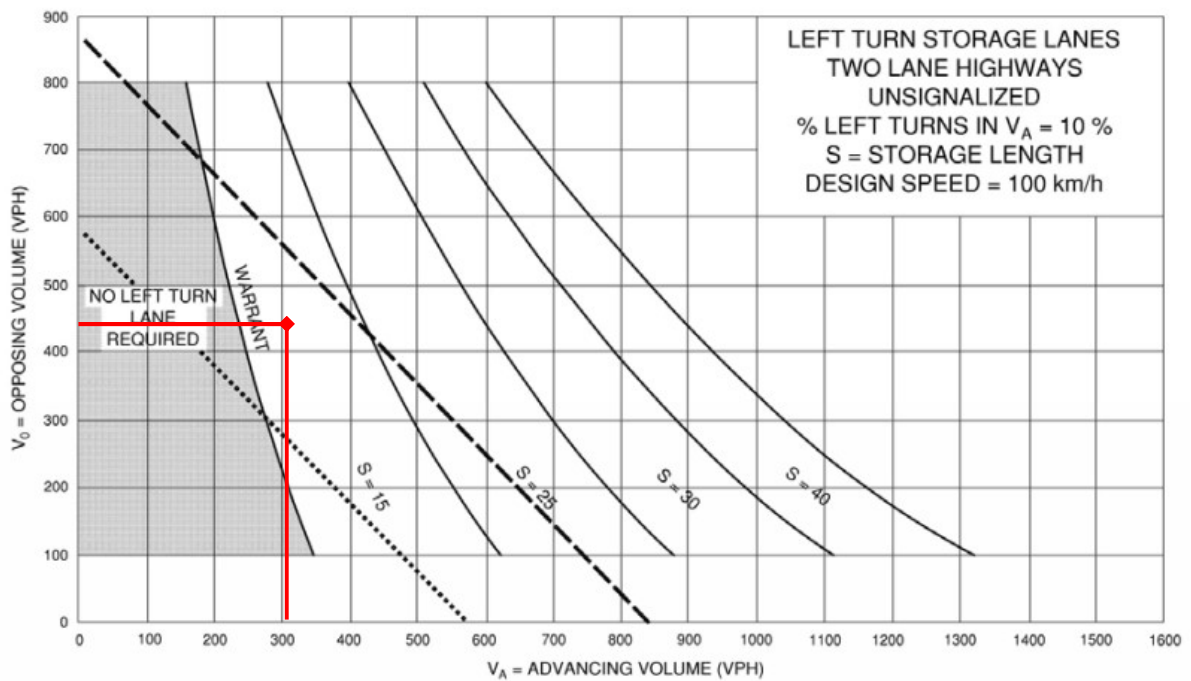


BG (2038) PM Peak – EB on County Road 25 at Wilson Road / Marshall Road

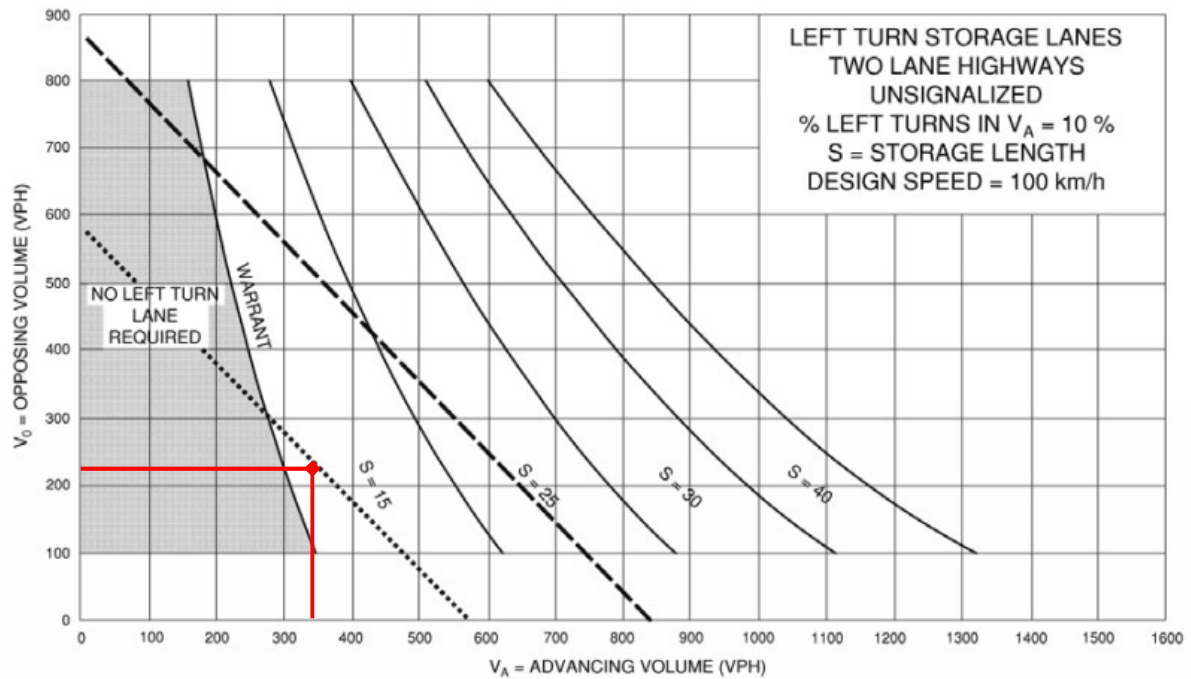


Total (2028) AM Peak – EB on County Road 25 at Wilson Road / Marshall Road

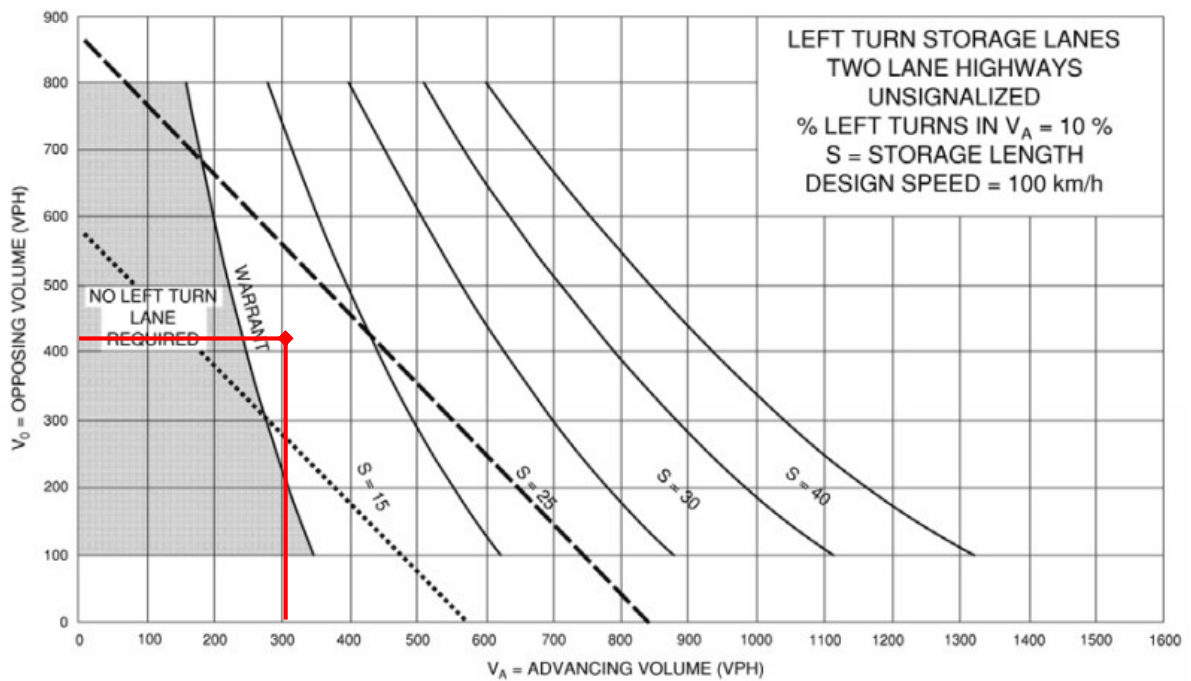


Total (2028) PM Peak – EB on County Road 25 at Wilson Road / Marshall Road

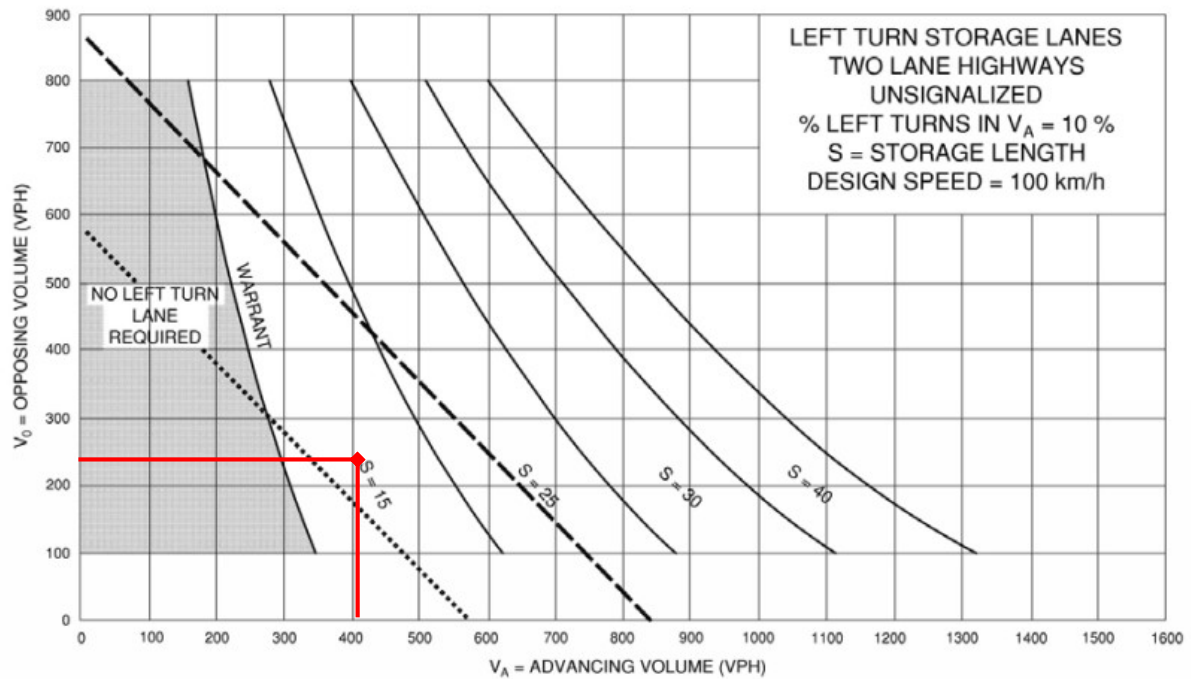


Total (2038) AM Peak – EB on County Road 25 at Wilson Road / Marshall Road

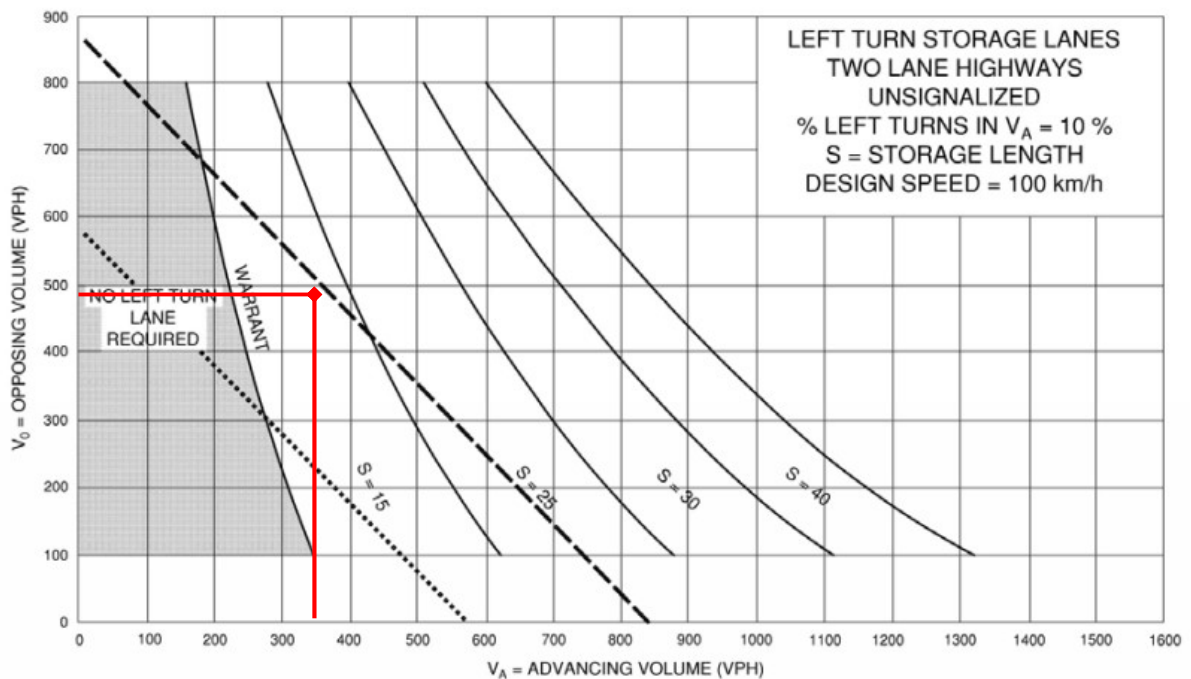


Total (2038) PM Peak – EB on County Road 25 at Wilson Road / Marshall Road

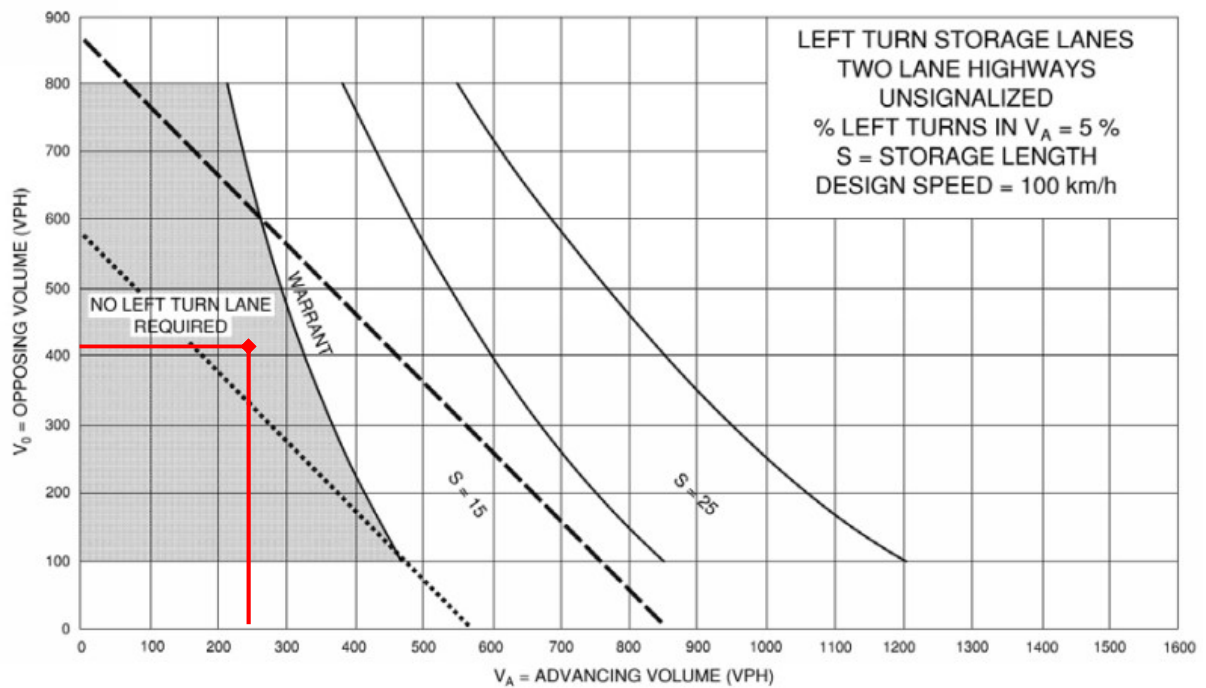


Total (2038) AM Peak – WB on County Road 25 at Wilson Road / Marshall Road

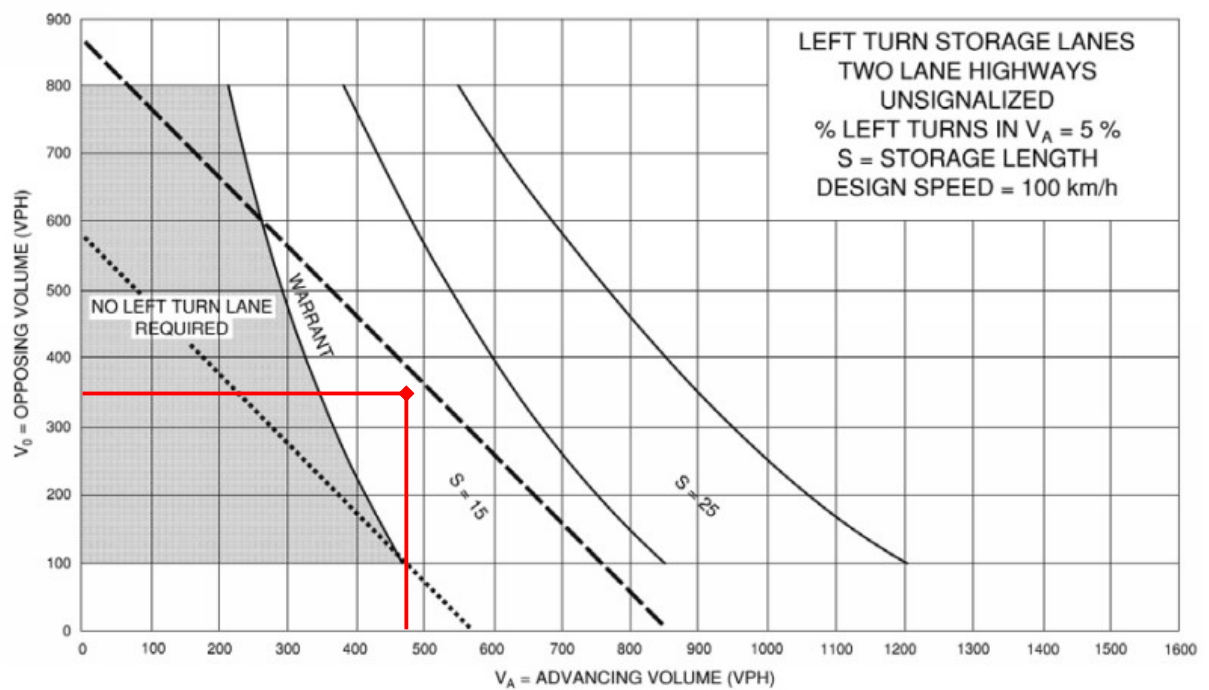

Total (2038) PM Peak – WB on County Road 25 at Wilson Road / Marshall Road

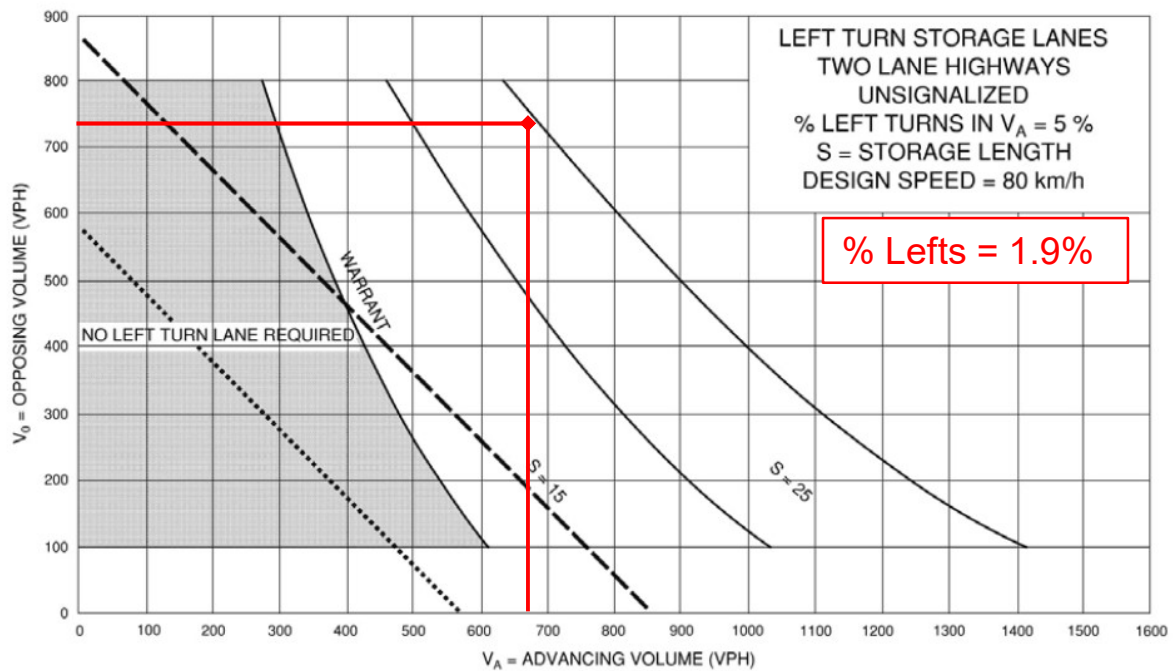

Total (2038) AM Peak – NB on County Road 93 at West Access

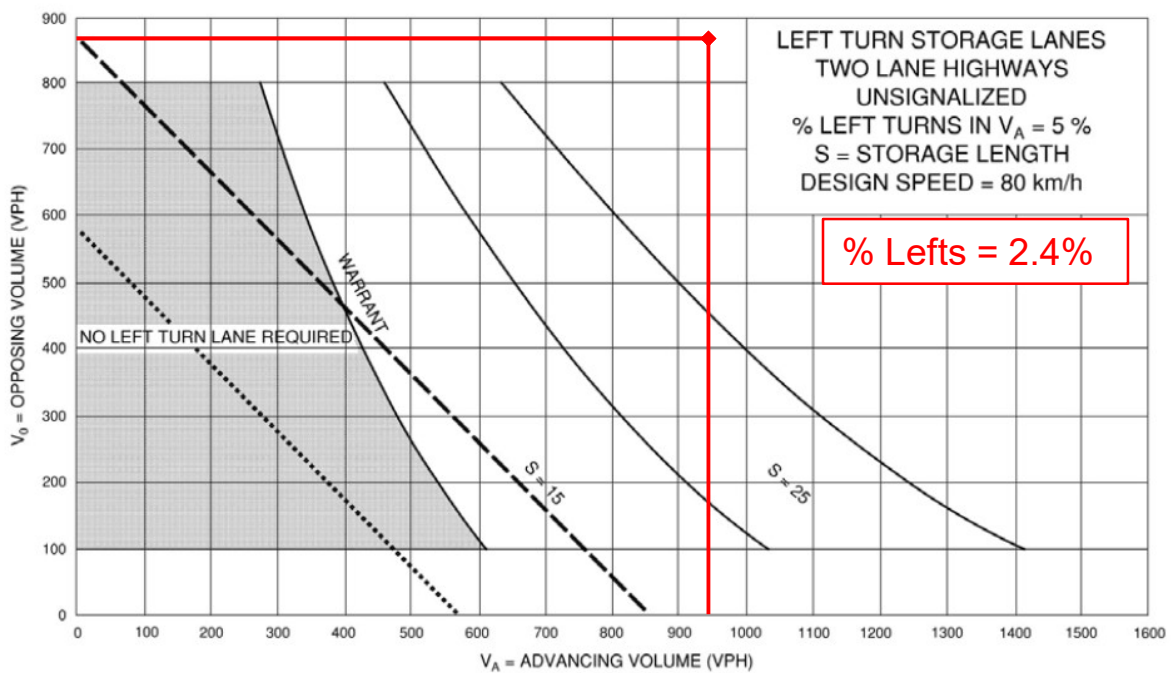

Total (2038) PM Peak – EB on NB on County Road 93 at West Access

Appendix I – OTM Signal Justification Sheets

Justification No. 7 - Total (2038) Traffic

CR 25 / West Access & Sundowner Road

Justification	Description		Compliance			Signal Warrant	Underground Provisions Warrant
			Sectional		Entire %		
			Rest. Flow	Numerical			
1. Minimum Vehicular Volume	A. Vehicle volume, all approaches (average hour)	720	574	80%	66%	NO	NO
	B. Vehicle volume, along minor streets (average hour)	170	141	83%		NO	NO
2. Delay to cross traffic	A. Vehicle volume, major street (average hour)	720	398	55%	46%	NO	NO
	B. Combined vehicle and pedestrian volume crossing artery from minor streets (average hour)	75	45	60%		NO	NO

Justification No. 7 - Total (2038) Traffic

CR 25 / Marshall Rd & Wilson Rd

Justification	Description		Compliance			Signal Warrant	Underground Provisions Warrant
			Sectional		Entire %		
			Free Flow	Numerical			
1. Minimum Vehicular Volume	A. Vehicle volume, all approaches (average hour)	480	486	101%	78%	NO	YES
	B. Vehicle volume, along minor streets (average hour)	120	112	93%		NO	NO
2. Delay to cross traffic	A. Vehicle volume, major street (average hour)	480	349	73%	61%	NO	NO
	B. Combined vehicle and pedestrian volume crossing artery from minor streets (average hour)	50	57	113%		NO	YES

Justification No. 7 - Total (2038) Traffic

CR 93 / East Access

Justification	Description		Compliance			Signal Warrant	Underground Provisions Warrant
			Sectional		Entire %		
			Rest. Flow	Numerical			
1. Minimum Vehicular Volume	A. Vehicle volume, all approaches (average hour)	900	841	93%	8%	NO	NO
	B. Vehicle volume, along minor streets (average hour)	255	32	12%		NO	NO
2. Delay to cross traffic	A. Vehicle volume, major street (average hour)	900	788	88%	7%	NO	NO
	B. Combined vehicle and pedestrian volume crossing artery from minor streets (average hour)	170	19	11%		NO	NO

Appendix I – NHCRP Internal Recapture Sheets

Project Name:	659 Balm Beach Rd
Analysis Period:	AM Street Peak Hour

Table 7-A: Conversion of Vehicle-Trip Ends to Person-Trip Ends						
Land Use	Table 7-A (D): Entering Trips			Table 7-A (O): Exiting Trips		
	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.00	44	44	1.00	29	29
Restaurant	1.00	0	0	1.00	0	0
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1.00	17	17	1.00	55	55
Hotel	1.00	0	0	1.00	0	0

Table 8-A (O): Internal Person-Trip Origin-Destination Matrix (Computed at Origin)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	8		4	0	4	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	1	1	11	0		0
Hotel	0	0	0	0	0	

Table 8-A (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		14	0	0	0	0
Retail	0		0	0	0	0
Restaurant	0	4		0	1	0
Cinema/Entertainment	0	0	0		0	0
Residential	0	7	0	0		0
Hotel	0	2	0	0	0	

Table 9-A (D): Internal and External Trips Summary (Entering Trips)						
Destination Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	1	43	44	43	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	0	17	17	17	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

Table 9-A (O): Internal and External Trips Summary (Exiting Trips)						
Origin Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	0	29	29	29	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	1	54	55	54	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A

²Person-Trips

³Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator

*Indicates computation that has been rounded to the nearest whole number.

Project Name:	659 Balm Beach Rd
Analysis Period:	PM Street Peak Hour

Table 7-P: Conversion of Vehicle-Trip Ends to Person-Trip Ends						
Land Use	Table 7-P (D): Entering Trips			Table 7-P (O): Exiting Trips		
	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.00	106	106	1.00	106	106
Restaurant	1.00	0	0	1.00	0	0
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1.00	45	45	1.00	29	29
Hotel	1.00	0	0	1.00	0	0

Table 8-P (O): Internal Person-Trip Origin-Destination Matrix (Computed at Origin)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	2		31	4	28	5
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	1	12	6	0		1
Hotel	0	0	0	0	0	

Table 8-P (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		8	0	0	2	0
Retail	0		0	0	21	0
Restaurant	0	53		0	7	0
Cinema/Entertainment	0	4	0		2	0
Residential	0	11	0	0		0
Hotel	0	2	0	0	0	

Table 9-P (D): Internal and External Trips Summary (Entering Trips)						
Destination Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	11	95	106	95	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	21	24	45	24	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

Table 9-P (O): Internal and External Trips Summary (Exiting Trips)						
Origin Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	21	85	106	85	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	11	18	29	18	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P

²Person-Trips

³Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator

*Indicates computation that has been rounded to the nearest whole number.

Project Name:	659 Balm Beach Rd
Analysis Period:	AM Street Peak Hour

Table 7-A: Conversion of Vehicle-Trip Ends to Person-Trip Ends						
Land Use	Table 7-A (D): Entering Trips			Table 7-A (O): Exiting Trips		
	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.00	44	44	1.00	29	29
Restaurant	1.00	0	0	1.00	0	0
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1.00	17	17	1.00	55	55
Hotel	1.00	0	0	1.00	0	0

Table 8-A (O): Internal Person-Trip Origin-Destination Matrix (Computed at Origin)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	8		4	0	4	0
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	1	1	11	0		0
Hotel	0	0	0	0	0	

Table 8-A (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		14	0	0	0	0
Retail	0		0	0	0	0
Restaurant	0	4		0	1	0
Cinema/Entertainment	0	0	0		0	0
Residential	0	7	0	0		0
Hotel	0	2	0	0	0	

Table 9-A (D): Internal and External Trips Summary (Entering Trips)						
Destination Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	1	43	44	43	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	0	17	17	17	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

Table 9-A (O): Internal and External Trips Summary (Exiting Trips)						
Origin Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	0	29	29	29	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	1	54	55	54	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-A

²Person-Trips

³Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator

*Indicates computation that has been rounded to the nearest whole number.

Project Name:	659 Balm Beach Rd
Analysis Period:	PM Street Peak Hour

Table 7-P: Conversion of Vehicle-Trip Ends to Person-Trip Ends						
Land Use	Table 7-P (D): Entering Trips			Table 7-P (O): Exiting Trips		
	Veh. Occ.	Vehicle-Trips	Person-Trips*	Veh. Occ.	Vehicle-Trips	Person-Trips*
Office	1.00	0	0	1.00	0	0
Retail	1.00	106	106	1.00	106	106
Restaurant	1.00	0	0	1.00	0	0
Cinema/Entertainment	1.00	0	0	1.00	0	0
Residential	1.00	45	45	1.00	29	29
Hotel	1.00	0	0	1.00	0	0

Table 8-P (O): Internal Person-Trip Origin-Destination Matrix (Computed at Origin)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		0	0	0	0	0
Retail	2		31	4	28	5
Restaurant	0	0		0	0	0
Cinema/Entertainment	0	0	0		0	0
Residential	1	12	6	0		1
Hotel	0	0	0	0	0	

Table 8-P (D): Internal Person-Trip Origin-Destination Matrix (Computed at Destination)						
Origin (From)	Destination (To)					
	Office	Retail	Restaurant	Cinema/Entertainment	Residential	Hotel
Office		8	0	0	2	0
Retail	0		0	0	21	0
Restaurant	0	53		0	7	0
Cinema/Entertainment	0	4	0		2	0
Residential	0	11	0	0		0
Hotel	0	2	0	0	0	

Table 9-P (D): Internal and External Trips Summary (Entering Trips)						
Destination Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	11	95	106	95	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	21	24	45	24	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

Table 9-P (O): Internal and External Trips Summary (Exiting Trips)						
Origin Land Use	Person-Trip Estimates			External Trips by Mode*		
	Internal	External	Total	Vehicles ¹	Transit ²	Non-Motorized ²
Office	0	0	0	0	0	0
Retail	21	85	106	85	0	0
Restaurant	0	0	0	0	0	0
Cinema/Entertainment	0	0	0	0	0	0
Residential	11	18	29	18	0	0
Hotel	0	0	0	0	0	0
All Other Land Uses ³	0	0	0	0	0	0

¹Vehicle-trips computed using the mode split and vehicle occupancy values provided in Table 2-P

²Person-Trips

³Total estimate for all other land uses at mixed-use development site-not subject to internal trip capture computations in this estimator

*Indicates computation that has been rounded to the nearest whole number.